



Koramangala Floods: Causes

Mismanagement of Landscape: Abuse of Bellandur-Agara wetlands, Narrowing and Concretising RajaKaluve and encroachment of storm water drains, Dumping of solid waste & building debris, Apathy of Civic Agencies

T V Ramachandra



Vinay S

Bharath H. Aithal

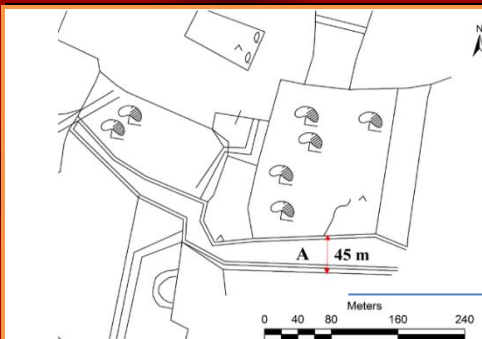

Narrowing and concretising storm water drains - from Agara to Bellandur

Lakes with natural drains

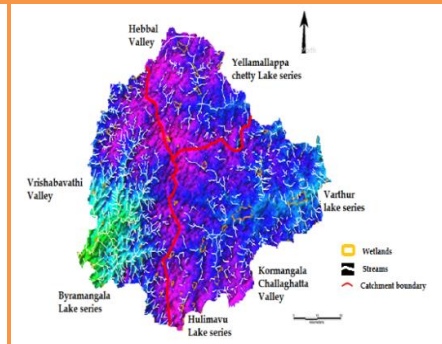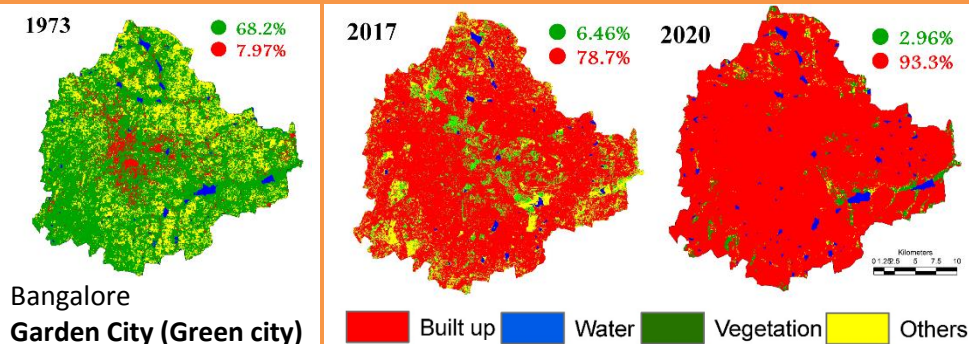

Dead city with paved surfaces - Unplanned, Unrealistic and Irresponsible Urbanisation

Drains: Missing interconnectivity



Violations in Valley Zones: Disappeared Agaram- Bellandur wetlands [loss of Ecosystem Integrity]

Gautam and Vasantha Jagadisan Endowment– Lake Rejuvenation
The Ministry of Science and Technology, Government of India
The Ministry of Environment, Forests & Climate Change, Government of India
Indian Institute of Science, Bangalore 560012

ENVIS Technical Report: 131

October 2017

**Energy & Wetlands Research Group
Centre for Ecological Sciences, CES TE 15
Indian Institute of Science
Bangalore-560012, INDIA**



Web: <http://ces.iisc.ernet.in/energy/>
<http://ces.iisc.ernet.in/biodiversity>
Email: tvr@iisc.ac.in; energy.ces@iisc.ac.in

Koramangala Floods: Causes



T V Ramachandra

Vinay S.

Bharath H. Aithal

ENVIS Technical Report: **131**
October 2017

Citation: Ramachandra T V, Vinay S, Bharath H. Aithal, 2017. Koramangala Floods: Causes, ENVIS Technical Report 131, Environmental Information System, CES, Indian Institute of Science, Bangalore 560012

[Study undertaken in response to the request from Koramangala residents]

**Energy & Wetlands Research Group,
Centre for Ecological Sciences, TE 15
New Bioscience Building, Third Floor, E Wing
Indian Institute of Science
Bangalore 560012, India**

<http://ces.iisc.ernet.in/energy>, <http://ces.iisc.ernet.in/biodiversity>

Email: tvr@iisc.ac.in, energy.ces@iisc.ac.in, envis.ces@iisc.ac.in

Note: The views expressed in the publication [ETR 131] are of the authors and not necessarily reflect the views of either the publisher, funding agencies or of the employer (Copyright Act, 1957; Copyright Rules, 1958, The Government of India).

KORAMANGALA FLOODS: CAUSES



T V Ramachandra

Vinay S.

Bharath H. Aithal

ENVIS Technical Report: 131
October 2017

Citation: Ramachandra T V, Vinay S, Bharath H. Aithal, 2017. Koramangala Floods: Causes, ENVIS Technical Report 131, Environmental Information System, CES, Indian Institute of Science, Bangalore 560012

Content

Highlights	2
Executive Summary	4
CAUSAL FACTORS OF KORAMANGALA FLOODS	10
1. Abuse of wetlands	
2. Debris in storm water drains	20
3. Erection of compound wall:	23
4. Narrowing and concretising storm water drains	25
5. Loss of interconnectivity among lakes	35
2.0 Bangalore: City of Lakes, Tragedy: Disappearance of lakes/wetlands	37
3.0 REMEDIAL MEASURES – INTEGRATED WETLAND SYSTEM-JAKKUR MODEL PROPOSED CONSTRUCTED WETLAND MODEL AT BELLANDUR	51
	53
4.0 STOP UNPLANNED URBANISATION	58
Bengaluru's reality: towards unlivable status with unplanned urban trajectory	
5.0 Violations in valley zones and buffer zones of water bodies	60
6.0 Urban Floods: Case study of Bangalore (the report submitted in 2009 to (i) the Ministry of Home Affairs, Government of India, (ii) Government of Karnataka and (iii) BBMP, Bangalore	73

KORAMANGALA FLOODS: CAUSES


HIGHLIGHTS

Flooding in Koramangala locality is mainly due to

- (i) The abuse of wetlands with the Construction activities in the valley zone (SEZ by Karnataka Industrial Areas Development Board (KIADB)) of **Agara-Bellandur Lake. Wetland** was earlier aiding in retaining the rain water, ground water recharge and bioremediation
- (ii) **dumping of construction and demolition wastes in the wetland region, (iv) alteration of topography in the region and**
- (iii) **removal of storm water drains (connecting Agara- Bellandur lakes),**
- (iv) **narrowing and concretising rajakaluves (connecting Bellandur lake from Agara as well as S T Bed sides)**

During the field work on 1 May 2017 along with CEO, KLCDA it was observed

- i) Rajakaluve (storm water drain) connecting Bellandur Lake from city market side is narrowed to 28.5 m against the original width of 60 m (Figure 1) and also violating recent NGT guidelines (of maintaining storm water drains physical integrity as well as maintaining the buffer). This is mainly to help the encroachers of storm water drains while bypassing NGT's guidelines of storm water drain buffer regions
- ii) Concretisation of storm water – this would affect the hydrological functional ability of storm water drains – ground water recharge, remediation and flood mitigation
- iii) Concretization and narrowing the drains has only enhanced the flooding in the city, observed recently (15th August 2017, 24th August 2017).
- iv) implications of concretization: Impaired Ecosystem Functions - bioremediation and groundwater recharge (but maximization of benefits to consultants with frequent floods)
- v) BBMP while wasting the public money has made Bangalore landscape vulnerable with frequent floods.

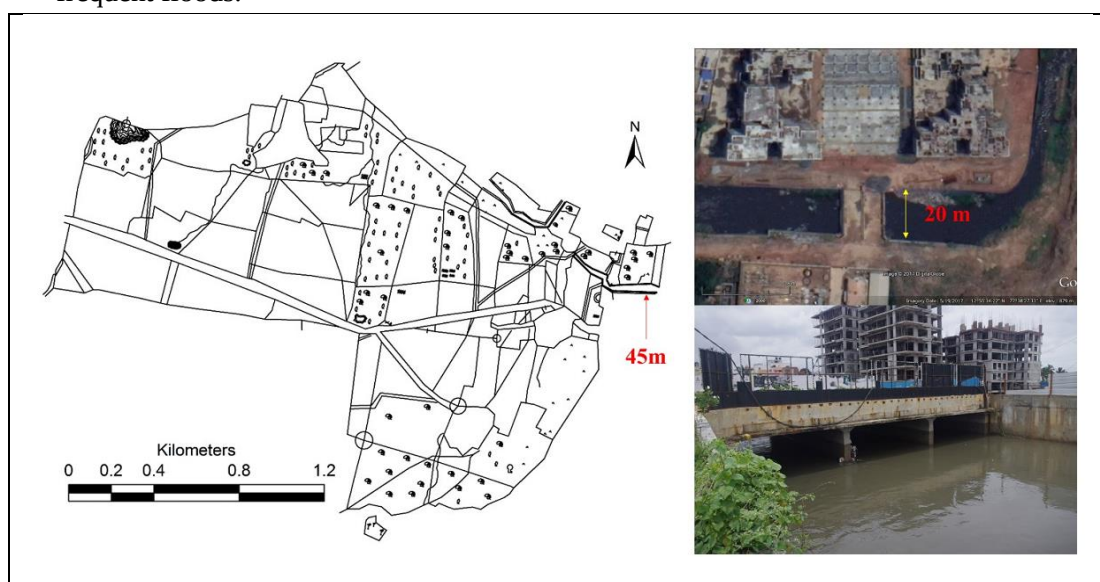

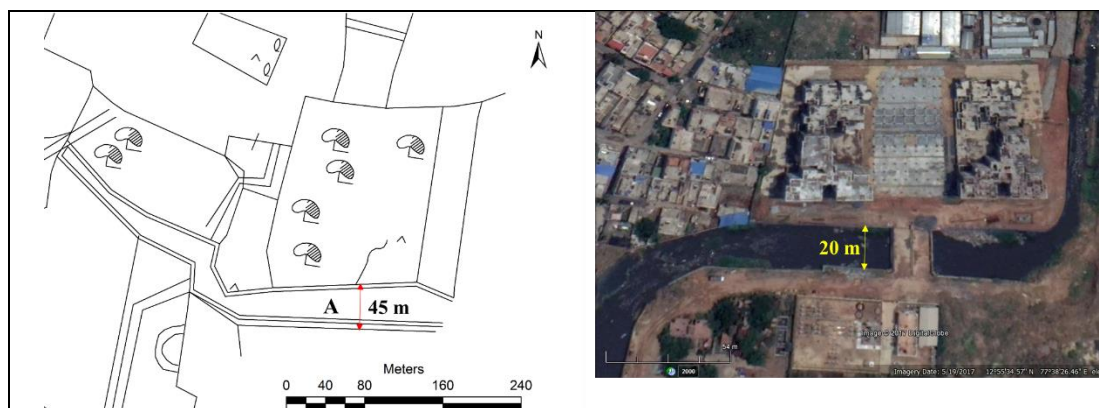


Figure 1: Rajakaluve A: from Agara Lake to Bellandur Lake

Reduced Channel size (senseless narrowing drains violating NGT guidelines to maintain integrity of storm water drain with buffer) – drain itself is reduced by 50% (Cadastral map – 45 m, current width as per Google Earth: 20m)

Flooding is a consequence of mismanagement of wetlands, narrowing Rajakaluves (storm water drain) and the removal of first and second order drains. Irrational decision of SEZ in wetlands has enhanced the flooding episodes in the region and citizens are now vulnerable to recurring flooding hazards (with increased precipitation and associated factors). CITIZEN ARE PAYING (WITH THE DAMAGES TO PROPERTIES AND LOSS OF LIFE) FOR IRRATIONAL DECISIONS OF DECISION MAKERS.

RECOMMENDATION:

1. RECOVER WETLANDS (BELLANDUR-AGARA) AND RESTORE INTEGRITY ON PRIORITY - Shift the proposed SEZ (in the ecologically fragile Bellandur-Agara wetlands) to other location in Karnataka immediately,
2. Reestablish interconnectivity among lakes by removing all blockades (encroachments, solid waste dumping)
3. Restore removed drains - Maintain the integrity of drains (as per cadastral maps) and reestablish connectivity through drains
4. Protect Valley zones and Buffer regions of wetlands: protect valley zones considering ecological function and these regions are 'NO DEVELOPMENT ZONES' as per CDP 2005, 2015
5. Restore wetlands (between Agara and Bellandur lakes) and set up STP (Sewage Treatment Plant) with constructed wetlands (similar to Jakkur Lake) in this region.
6. Stop narrowing and concretising natural drains
7. Remove the compound wall altering the hydrologic regime – leading to escalation of flooding impact
8. Penalise decision makers for violation of norms – acquiring wetlands (valley zone) for industrial activities, narrowing and concretising natural drains, allowing constructions in lake (wetlands) bed and in drains, deliberating violating NGT guidelines of buffer zone for lakes and Rajakaluves (narrowing drains to help encroachers).
9. Single Agency to manage lakes (preferably KLCDA as per 5 June 2015 Gazette Notification and Wetlands Rule 2016, GoI) – currently fragmented governance with too many para-state agencies (inefficient, incompetent and deliberately mismanaged)

KORAMANGALA FLOODS: CAUSES

Executive Summary: Floods in an urbanised landscape refer to the partial or complete inundation from the rapid accumulation or run-off resulting in the damage to property and loss of biotic elements (including humans). Urban flooding is a consequence of increased impermeable catchments resulting in higher catchment yield in a shorter duration and flood peaks sometimes reach up to three times. Thus, flooding occurs quickly due to faster flow times (in a matter of minutes). Causal factors include combinations of loss of pervious area in urbanising landscapes, inadequate drainage systems, blockade due to indiscriminate disposal of solid waste and building debris, encroachment of storm water drains, loss of inter connectivity among lakes, housing in floodplains and natural drainage and loss of natural flood-storages sites. Flood mitigation in urban landscape entails integrated ecological approaches combining the watershed land-use planning with the regional development planning. This includes engineering measures and flood preparedness with the understanding of ecological and hydrological functions of the landscape.

Bangalore is experiencing unprecedented urbanisation and sprawl in recent times due to concentrated developmental activities with impetus on industrialisation for the economic development of the region. This concentrated growth has resulted in the increase in population and consequent pressure on infrastructure, natural resources and ultimately giving rise to a plethora of serious challenges such as climate change, enhanced green-house gases emissions, lack of appropriate infrastructure, traffic congestion, and lack of basic amenities (electricity, water, and sanitation) in many localities, etc. This study shows that there has been a growth of 1028% in urban areas of Greater Bangalore across 45 years (1973 to 2017). Urban heat island phenomenon is evident from large number of localities with higher local temperatures. The study unravels the pattern of growth in Greater Bangalore and its implication on local climate (an increase of ~2 to 2.5 °C during the last decade) and also on the natural resources (88% decline in vegetation cover and 79% decline in water bodies), necessitating appropriate strategies for the sustainable management.

Frequent flooding (since 2000, even during normal rainfall) in Bangalore is a **consequence of the increase in impervious area with the high-density urban development in the catchment and loss of wetlands and vegetation**. This is coupled with narrowing and concretising storm water drains, encroachment of drains, removal of drains, lack of appropriate drainage maintenance works with the changes in enhanced run-offs, the encroachment and filling in the floodplain on the

waterways, obstruction by the sewer pipes and manholes and relevant structures, deposits of building materials and solid wastes with subsequent blockage of the system and also flow restrictions from under capacity road crossings (bridge and culverts). The lack of planning and enforcement has resulted in significant narrowing of the waterways and filling in of the floodplain by illegal developments. Causal factors and remedial measures to mitigate impacts of flooding are:

Reasons

1. Loss of interconnectivity among lakes due to encroachment of drains, removal of drains or dumping of solid wastes or construction and demolition (C & D) wastes
2. Encroachment of flood plains and wetlands (construction in valley zones, flood plains and lake bed) and de-notifying wetlands)
3. Narrowing and concretising storm water drains impairing hydrological functions of the natural drains
4. Loss of pervious areas - reduction of open spaces, wetlands and vegetation cover
5. Bangalore: Increased paved surfaces in the city (78% paved surface and likely to be 94% by 2020) due to unplanned irresponsible urbanisation by senseless decision makers.

Solutions: Ecological Management of Storm Water Drains and Wetlands to Mitigate Frequent Flooding in Bangalore

1. Reestablish interconnectivity among lakes by removing all blockades (encroachments, solid waste dumping)
2. Maintain the integrity of drains (as per cadastral maps) and reestablish connectivity through drains
3. Protect Valley zones and Buffer regions of wetlands: protect valley zones considering ecological function and these regions are 'NO DEVELOPMENT ZONES' as per CDP 2005, 2015
4. Stop narrowing and concretising natural drains
 - Vegetation in the drain takes the load during peak monsoon, there is no need to concretise the channel.
 - Vegetation allows groundwater recharge while treating the water (bioremediation);
 - Drains with vegetation without any bottlenecks (hindrances) would be the best option to mitigate floods.
 - Narrowing channel and concretizing would only increase the quantum of water and velocity, which would be disastrous.

- Objective should be towards mitigation of floods and not to generate high overland flows (with increased quantum and flow velocity)
- Experts should think sensibly with holistic knowledge (considering all subject knowledge) than fragmented narrow sectorial knowledge. Advice by pseudo experts would be detrimental as the society would be deprived of ground water, frequent floods and unnecessary livelihood threats.

5. Stop further choking of Koramangala

- Shift the proposed SEZ (in Bellandur-Agara wetlands) to other location in Karnataka,
- Stop further industrialisation and commercial establishments in the region.
- Protect open spaces – lakes, parks, etc.
- Stop further growth of dying city – with water and oxygen scarcity
- BWSSB should stop issuing senselessly NOC (no objection certificate) to major building projects as there is not sufficient water in the city.
- Environment clearance as per the norms of Environment Protection Act (2016), Wetlands (Conservation and Management) Rules, 2016, SWM 2016, C & D Wastes, 2016, Air act 1981, Water (prevention of Pollution) Act, 1974.

Activities around lakes	Norms to protect and conserve Wetlands
Encroachment of lake bed and loss of interconnectivity among lakes	The Hon'ble Supreme Court in Civil appeal number 1132/2011 at SLP (C) 3109/2011 on January 28,2011 has expressed concern regarding encroachment of common property resources, more particularly lakes (and raja kaluves) and it has directed the state governments for removal of encroachments on all community lands. Eviction of encroachment: Need to be evicted as per Karnataka Public Premises (eviction of unauthorised occupants) 1974 and the Karnataka Land Revenue Act, 1964
Buildings in the buffer zone of lakes	In case of water bodies, 75.0 m buffer of 'no development zone' (as per recent National Green Tribunal direction) is to be maintained around the lake (buffer region to be as per revenue records) • As per BDA, RMP 2015 (Regional Master Plan, 2015) • Section 17 of KTCP (Karnataka Town and Country Planning) Act, 1961 and sec 32 of BDA Act, 1976 • Wetlands (Conservation and Management) Rules 2010, Government of India; Wetlands Regulatory Framework, 2008.
Construction activities in the valley zone (SEZ by Karnataka Industrial Areas Development	This is contrary to sustainable development as the natural resources (lake, wetlands) get affected, eventually leading to the degradation/extinction of lakes. This reflects the ignorance of the administrative machinery on the importance of ecosystems and the need to protect valley zones considering

Board (KIADB) in the valley zone	ecological function and these regions are 'NO DEVELOPMENT ZONES' as per CDP 2005, 2015
Alterations in topography	Flooding of regions would lead to loss of property and human life and, spread of diseases.
Increase in deforestation in catchment area	Removing vegetation in the catchment area increases soil erosion and which in turn increases siltation and decreases transpiration
Documentation of biodiversity	• The biodiversity of every water body should form part of the School, College, People's Biodiversity Registers (SBR, CBR, PBR). • The local Biodiversity Management Committees (BMC) should be given necessary financial support and scientific assistance in documentation of diversity. • The presence of endemic, rare, endangered or threatened species and economically important ones should be highlighted • A locally implementable conservation plan has to be prepared for such species
Implementation of sanitation facilities	• The lakes are polluted with sewage, coliform bacteria and various other pathogens • Preserving the purity of waters and safeguarding the biodiversity and productivity, dumping of waste has to be prohibited • All the settlements alongside the water body should be provided with sanitation facilities so as not to impinge in anyway the pristine quality of water
Violation of regulatory and prohibitory activities as per Wetlands (Conservation and Management) Rules, 2016 and 2010; Regulatory wetland framework, 2008	Environment Impact Assessment (EIA) Notification, 2009. Wetlands (Conservation and Management) rules 2010, Government of India; Regulatory wetland framework, 2008 Regulated activity • Withdrawal of water/impoundment/diversion/interruption of sources • Harvesting (including grazing) of living/non-living resources (may be permitted to the level that the basic nature and character of the biotic community is not adversely affected) • Treated effluent discharges – industrial/ domestic/agro-chemical. • Plying of motorized boats • Dredging (need for dredging may be considered, on merit on case to case basis, only in cases of wetlands impacted by siltation) • Constructions of permanent nature within 50 m of periphery except boat jetties • Activity that interferes with the normal run-off and related ecological processes – up to 200 m Prohibited activity i. Conversion of wetland to non-wetland use

	ii. Reclamation of wetlands iii. Solid waste dumping and discharge of untreated effluents
Damage of fencing, solid waste dumping and encroachment problems in Varthur lake series	High Court of Karnataka (WP No. 817/2008) had passed an order which include: • Protecting lakes across Karnataka, • Prohibits dumping of garbage and sewage in Lakes • Lake area to be surveyed and fenced and declare a no development zone around lakes • Encroachments to be removed • Forest department to plant trees in consultation with experts in lake surroundings and in the watershed region • Member Secretary of state legal services authority to monitor implementation of the above in coordination with Revenue and Forest Departments • Also setting up district lake protection committees
Polluter Pays principle	National Environment Policy, 2006 The principal objectives of NEP includes : • Protection and conservation of critical ecological systems and resources, and invaluable natural and man-made heritage • Ensuring judicious use of environmental resources to meet the needs and aspirations of the present and future generations • It emphasizes the “Polluter Pays” principle, which states the polluter should, in principle, bear the cost of pollution, with due regard to the public interest
Prevention of pollution of lake	National Water Policy, 2002 Water is a scarce and precious national resource and requires conservation and management. Watershed management through extensive soil conservation, catchment-area treatment, preservation of forests and increasing the forest cover and the construction of check-dams should be promoted. The water resources should be conserved by retention practices such as rain water harvesting and prevention of pollution.
Discharge of untreated sewage into lakes	The Environment (Protection) Act, 1986 • Lays down standards for the quality of environment in its various aspects • Laying down standards for discharge of environmental pollutants from various sources and no persons shall discharge any pollutant in excess of such standards

	• Restriction of areas in which industries, operations or processes shall not be carried out or carried out subject to certain safeguards
The water pollution, prevention and its control measures were not looked upon	Water (Prevention and Control of Pollution) Act, 1974 • It is based on the “Polluter pays” principle. The Pollution Control Boards performs the following functions : • Advice the government on any matter concerning the prevention and control of water pollution. • Encourage, conduct and participate in investigations and research relating to problems of water pollution and prevention, control or abatement of water pollution. • Inspects sewage and effluents as well as the efficiency of the sewage treatment plants. • Lay down or modify existing effluent standards for the sewage. • Lay down standards of treatment of effluent and sewage to be discharged into any particular stream. • Notify certain industries to stop, restrict or modify their procedures if the present procedure is deteriorating the water quality of streams.
Pathetic water scenario and insufficient drinking water in Bangalore	The depletion of ground water and drying up of lakes has affected the water availability to meet the current population. At the 4% population growth rate of Bangalore over the past 50 years, the current population of Bangalore is 8.5 million (2011). Water supply from Hesarghatta has dried, Thippagondanahalli is drying up, the only reliable water supply to Bangalore is from Cauvery with a gross of 1,410 million liters a day (MLD). There is no way of increasing the drawal from Cauvery as the allocation by the Cauvery Water Disputes Tribunal for the entire urban and rural population in Cauvery Basin in Karnataka is only 8.75 TMC ft (one thousand million cubic – TMC ft equals 78 MLD), Bangalore city is already drawing more water-1,400 MLD equals 18 TMC—than the allocation for the entire rural and urban population in Cauvery basin

CAUSAL FACTORS OF KORAMANGALA FLOODS

1. ABUSE OF WETLANDS (AGARAM –BELLANDUR) - VIOLATIONS LEADING TO THE ALTERATIONS IN THE ECOSYSTEM INTEGRITY

Violation that persist in Bellandur – Agara wetland (Figure 1) are:

- i. Abuse of wetlands (with dumps, building materials, etc.) -Non-removal of building debris (used for filling the drains – highlighted in Figure 2)
- ii. Narrowing Rajakaluves;
- iii. Concretised storm water drains;
- iv. Construction of compound wall altering the hydrologic regime – leading to escalation of flooding impact;
- v. Buildings in the buffer zone of Bellandur lake (and valley zone of Agara-Bellandur);
- vi. Existence of labour sheds and pollution due to open defecation (lack of appropriate sanitation for labourers);
- vii. Dumping of solid waste – plastic bottles, polythene covers, etc.;
- viii. Unauthorised occupation of wetlands in the valley zone;
- ix. Not clearing encroached lake area (dumped debris continue to exist);
- x. Inefficient custodians of wetlands (BDA and revenue department);
- xi. Unplanned activities – proposing SEZ in the city (that would enhance traffic density, leading to further traffic chaos; decline in groundwater table; pollution of wetlands) by KIADB, which only highlight the inefficient and incompetent planning system in the city.

Belladur Agara wetland is the pristine ecosystem supporting dependent biota and was aiding as a zone for the inundation of floodwater, percolation of precipitation, sustained recharge of ground water resources, while reducing overland flow. The wetlands are part of flood plains that follows the terrain. Consequences of continued abuse of wetlands are (i) increased instances of flooding, (ii) enhanced velocities of the discharge (iii) reduced recharge of ground water, (iv) loss of life and damages to the property.

Bellandur-Agara wetland's integrity is altered due to (i) filling of low lying area with construction debris, (ii) removal of interconnecting drains (visible in remote sensing data of 2000, Figure 2) , (iii) narrowing and concretizing drains to aid the encroachment. Figure 1 indicates the Revenue map of Agara village indicating Wetland under study. Cyan line in the revenue map indicates channels connecting Agara and Bellandur lakes along the wetland

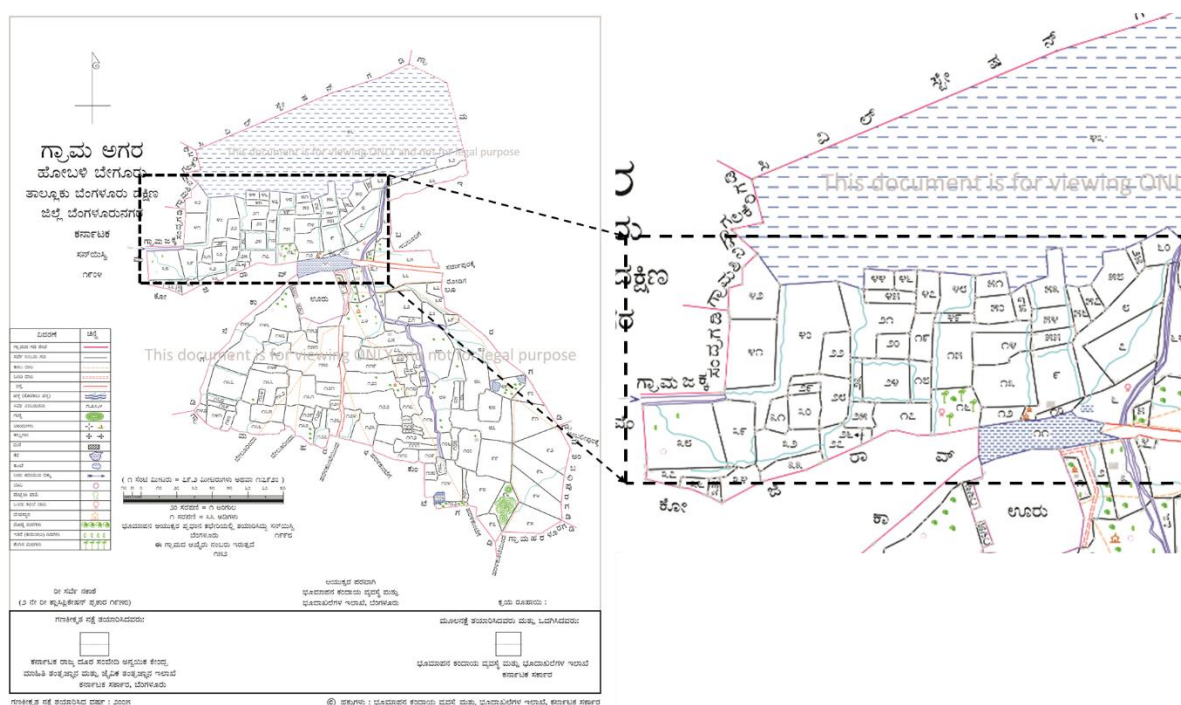
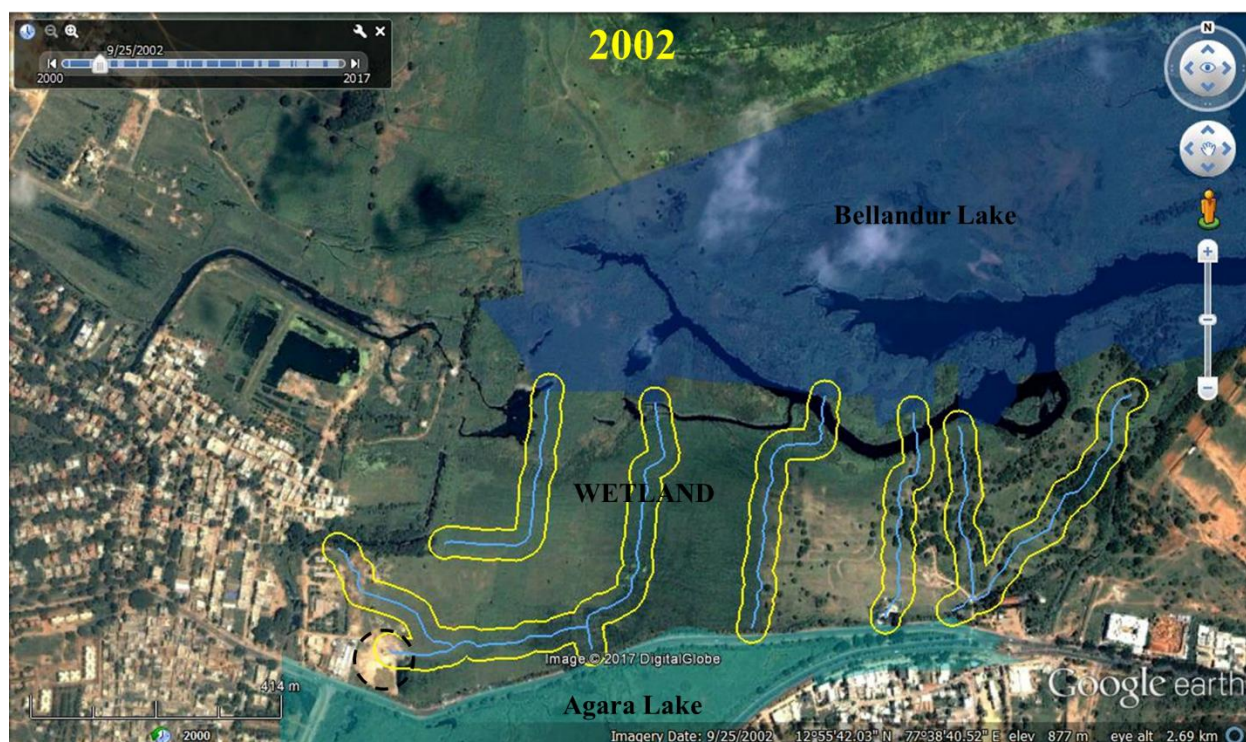
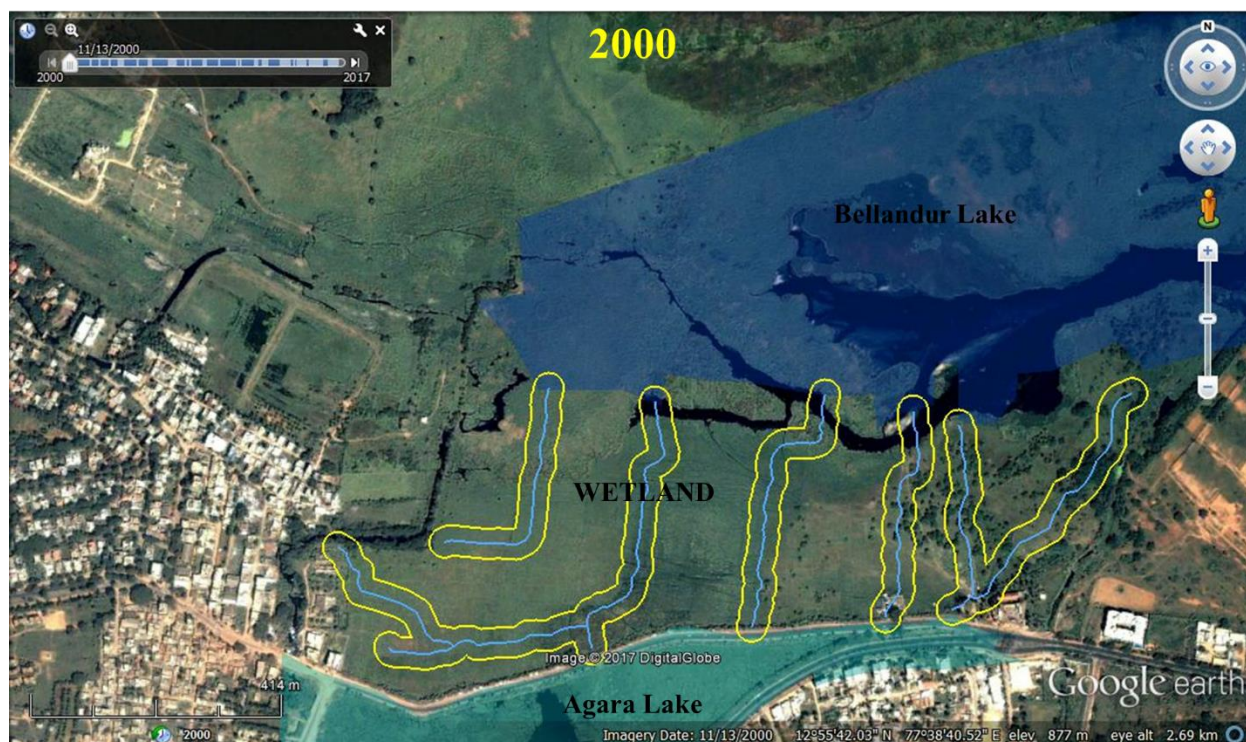
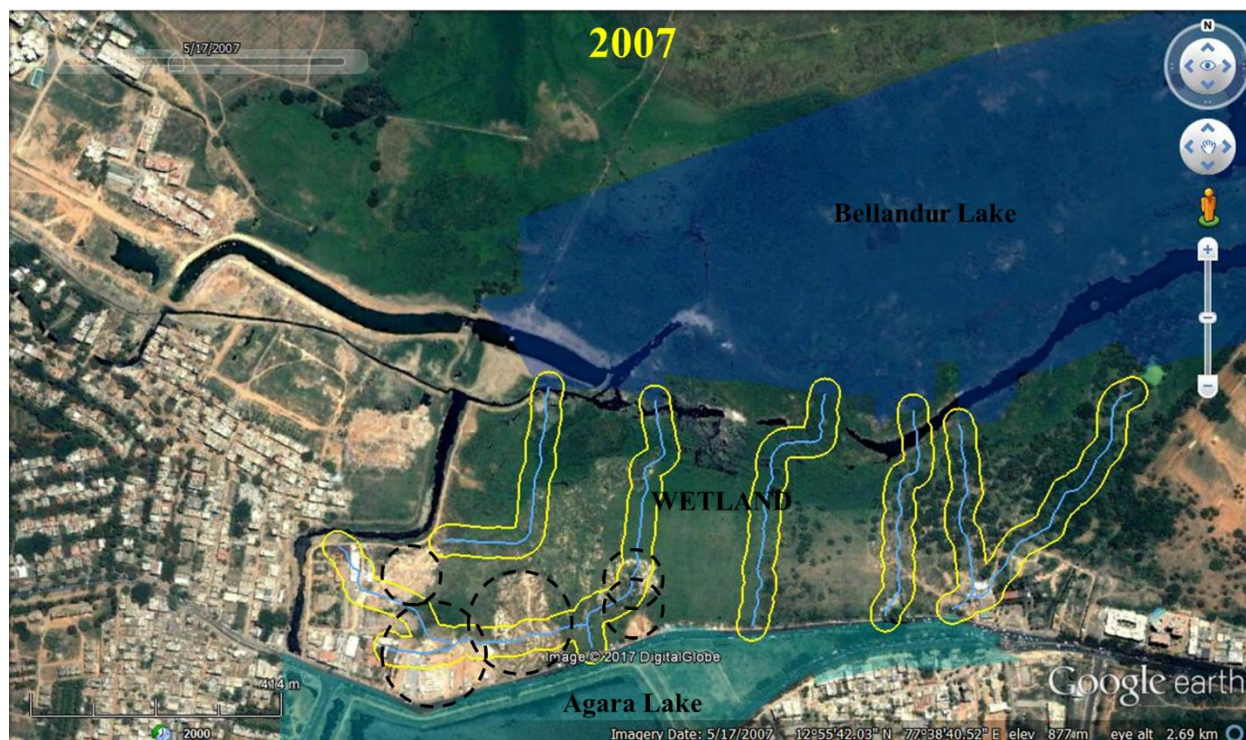
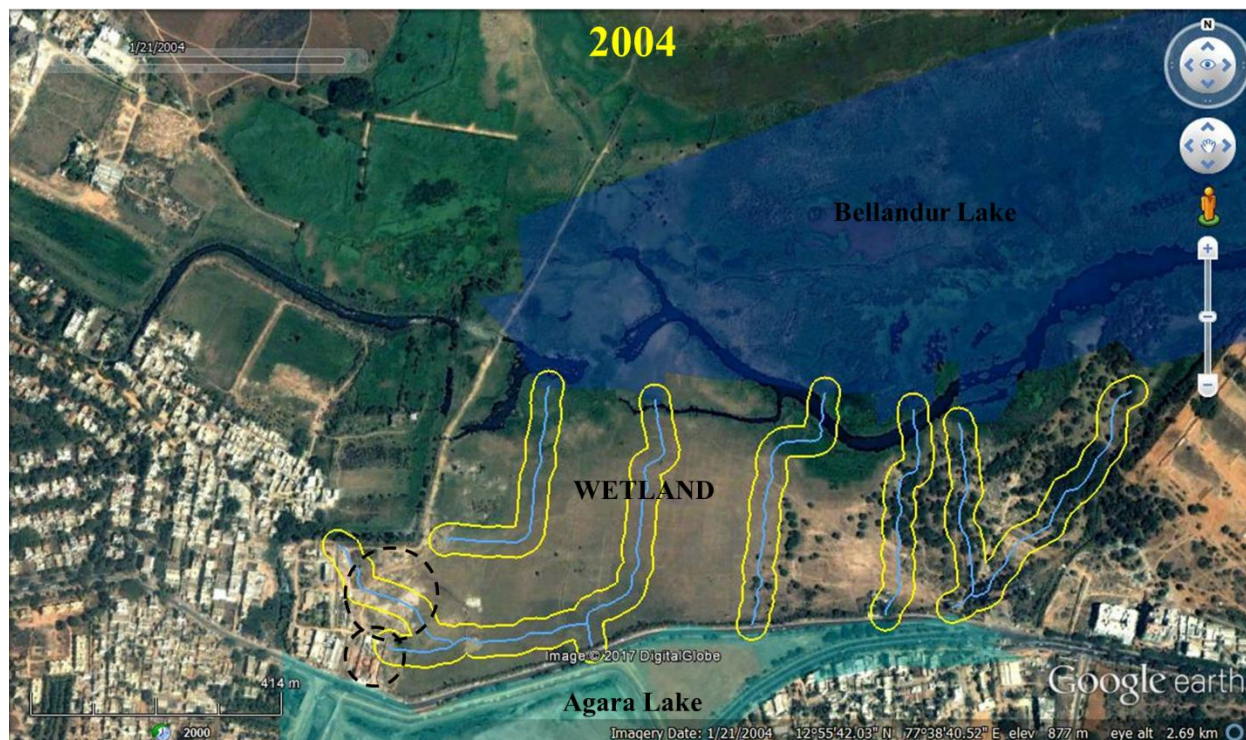
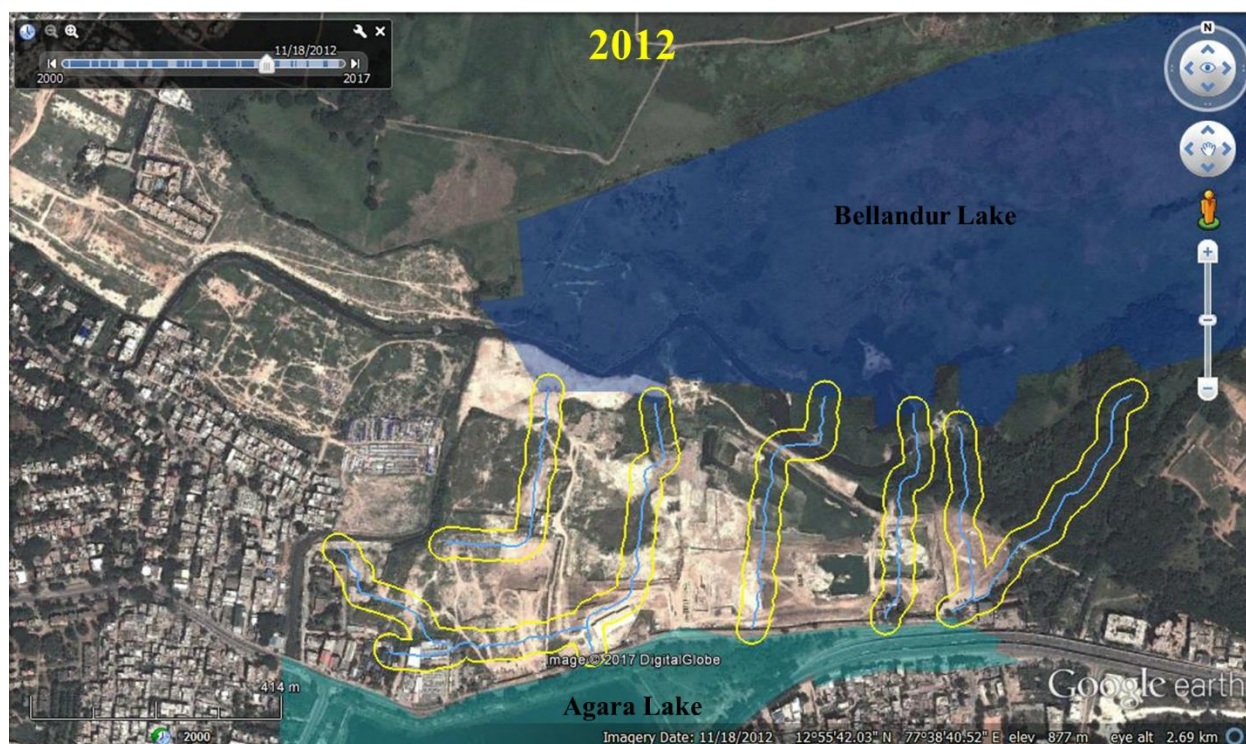
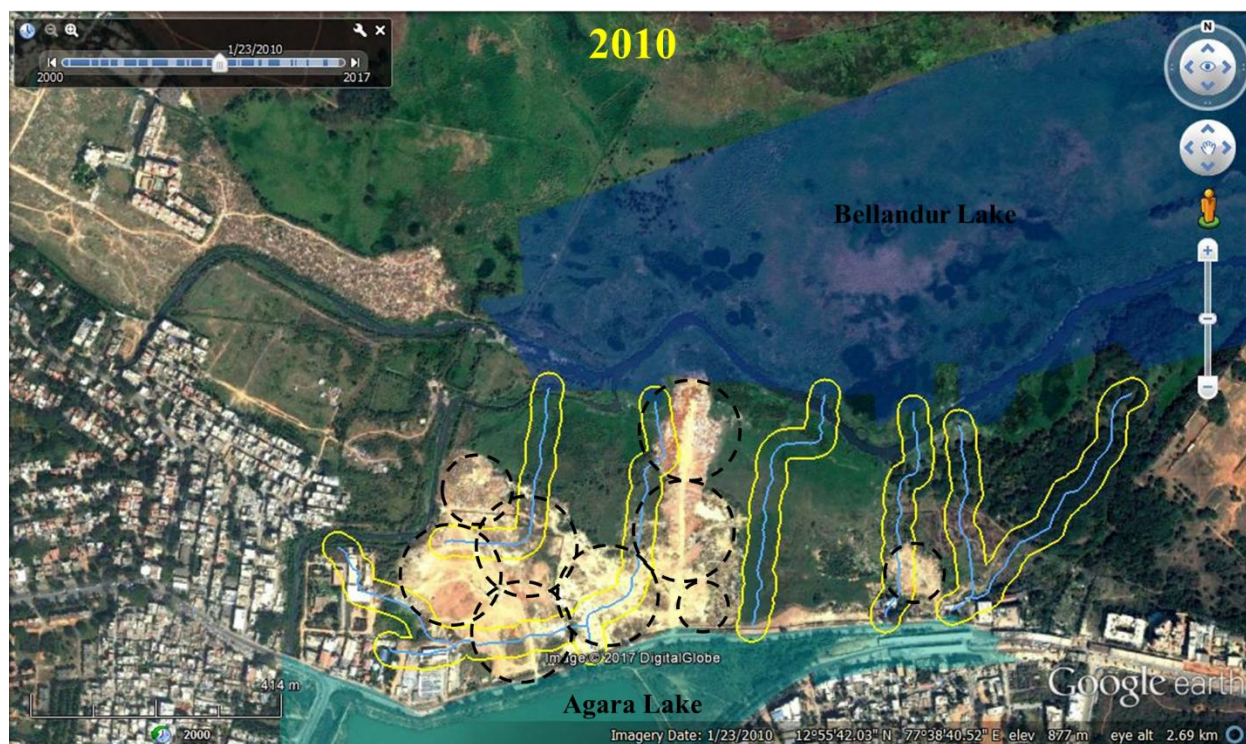


Figure 1: Agara Bellandur Wetland

Land cover dynamics in the wetland of Agara Bellandur lake is as presented in Figure 2. It is observed that since 2002, construction debris, soil were constantly dumped in the wetland, altering the topography (undulating terrains are levelled). The wetland was completely altered in 2012 with the disappearance of connecting drains due to large scale filling, excavations for construction activity. Now, only drains in the army campus exists.







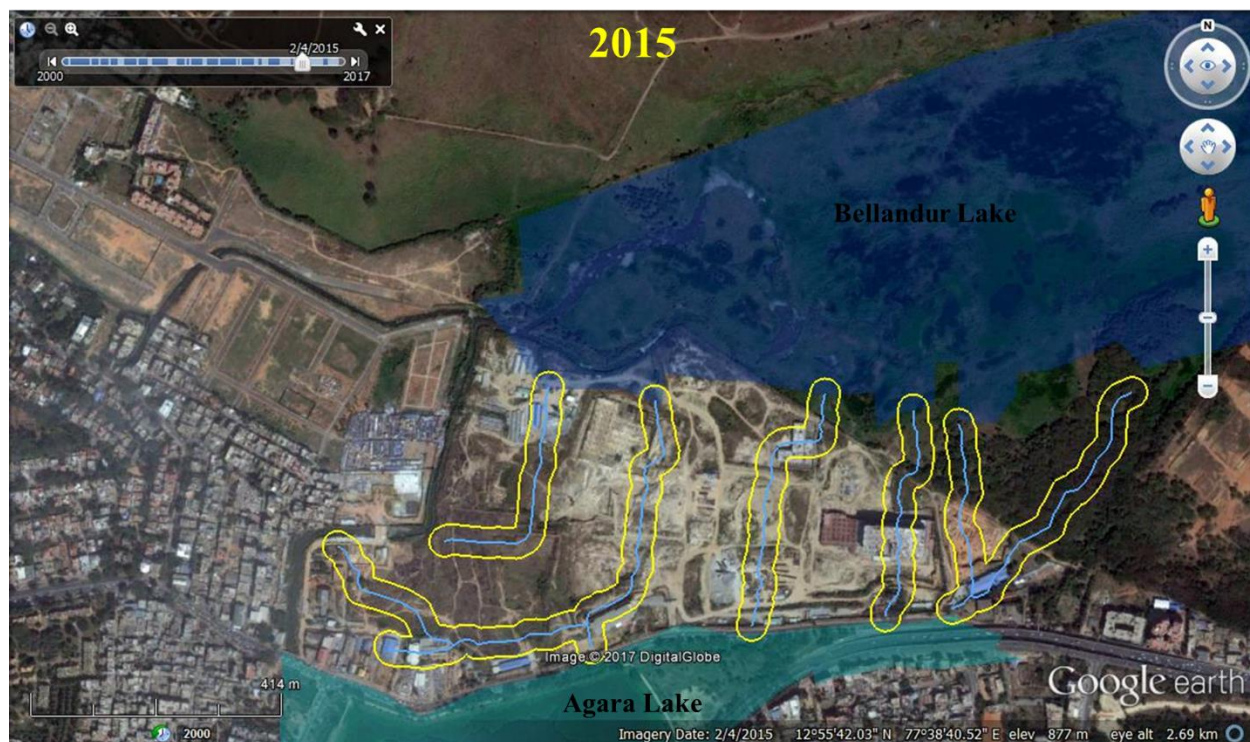
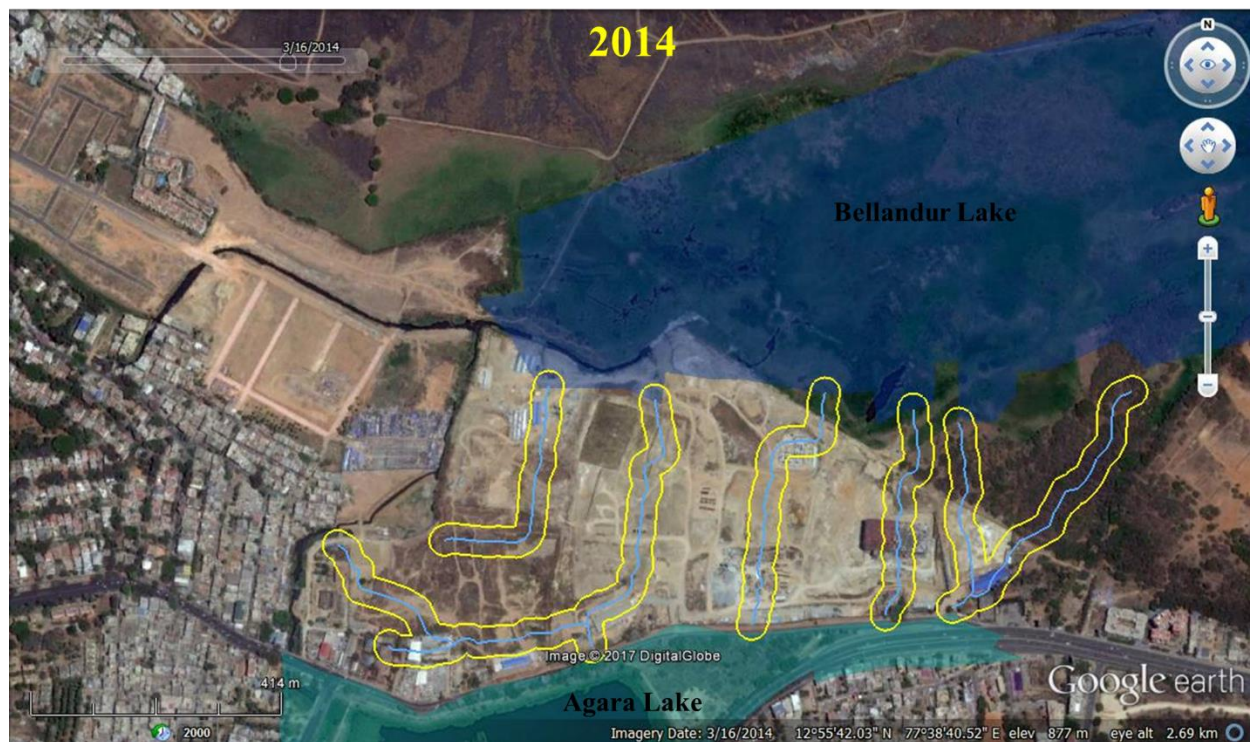




Figure 2: Landscape changes in the Wetland region and along buffer zone (25 m) of channels

Figure 3 and Figure 4 demonstrates the alterations in the wetlands region observed at the site at sites in 2014 and 2017 field visits. Large scale construction debris, Soil and Solid waste filled, over which construction activity was under progress. Figure 4 also depicts the concretized channel

and violation of norms. The channel has been reduced in width from 45 m to nearly 20 m (Figure 5).





Figure 3: Land status in 2014



Figure 4: Landscape status as on September 2nd 2017

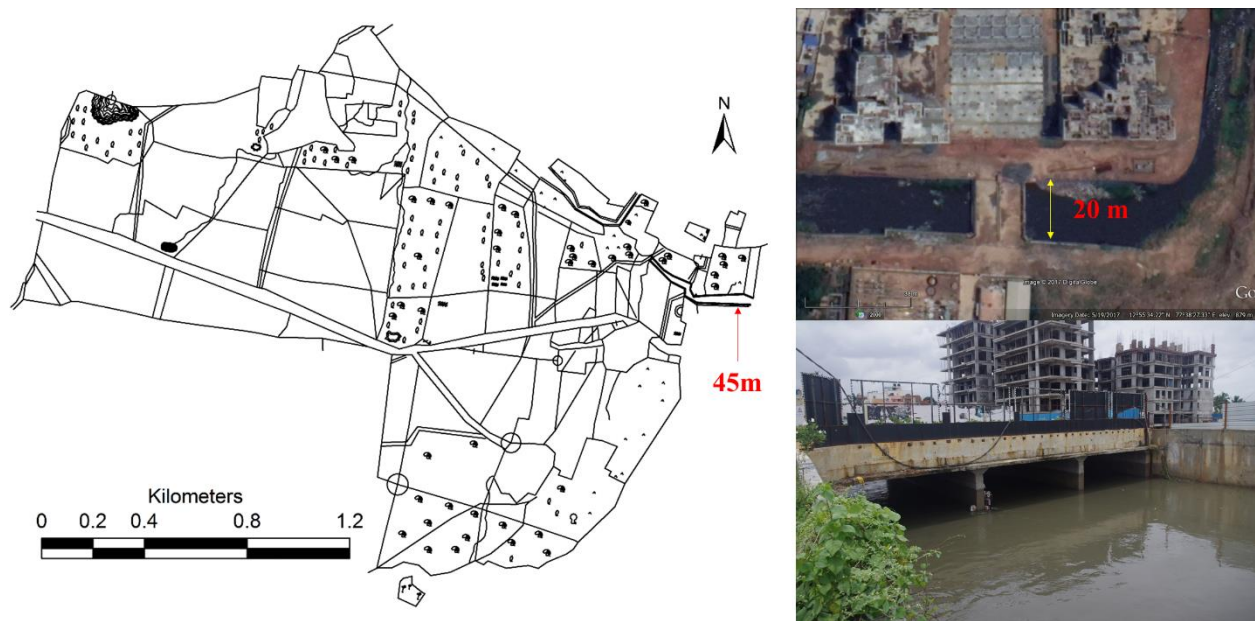
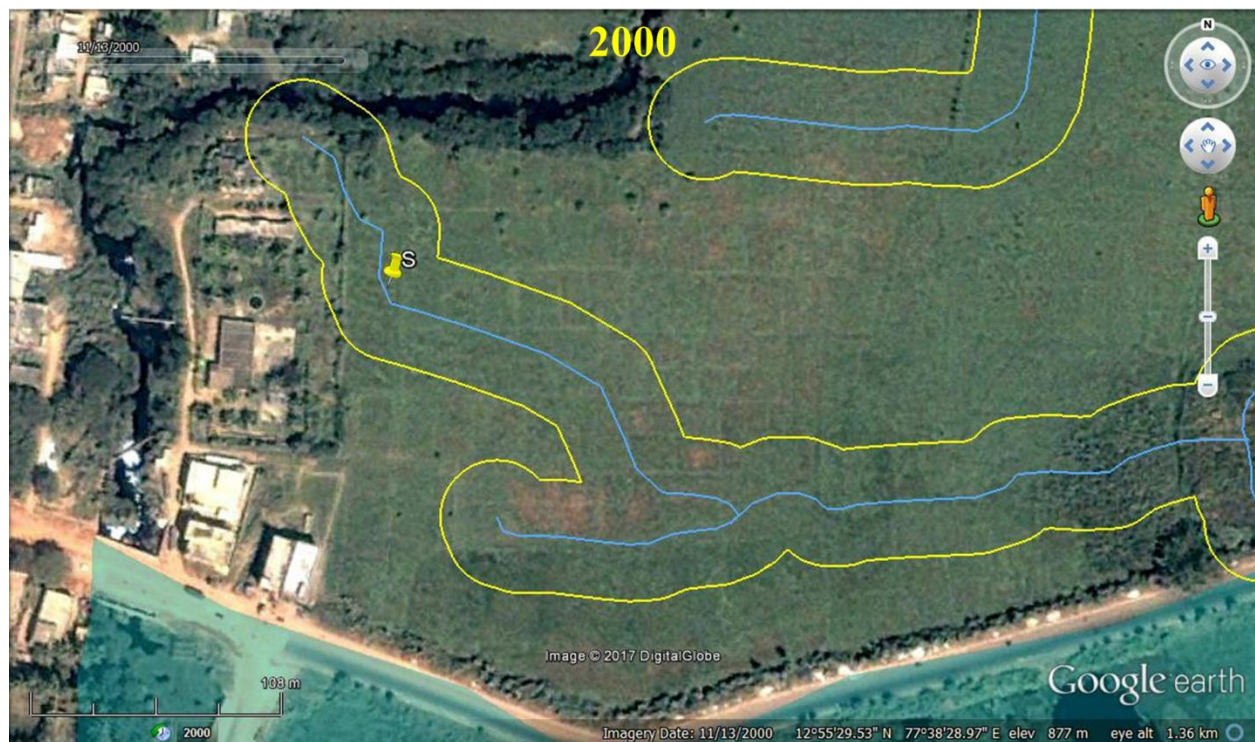


Figure 5: Reduced Channel size

Causal Factor 2: Debris in storm water drains: Figure 6 indicates the status of one of the connecting channel during the field visit on 1st September 2017. The channel continued to be filled with construction debris (since 2004). Figure 7 depicts the current status of one of the connecting channel.



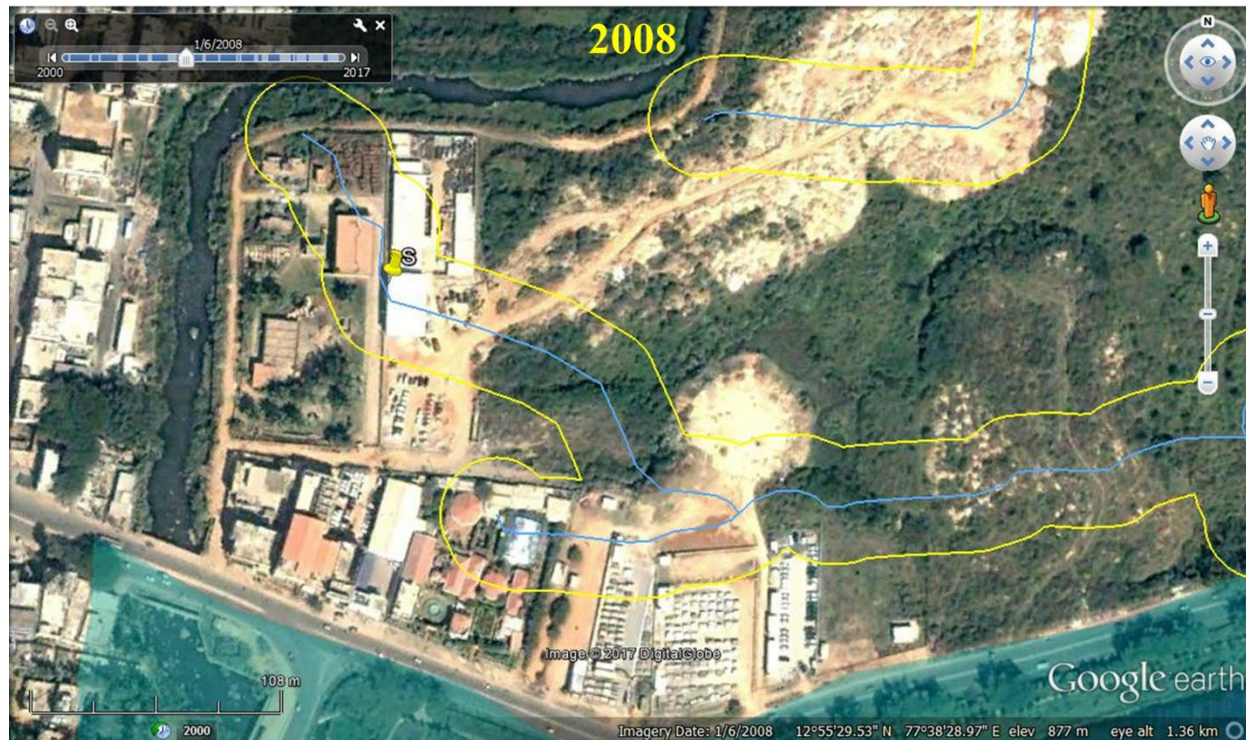




Figure 6: Status of Channel across time

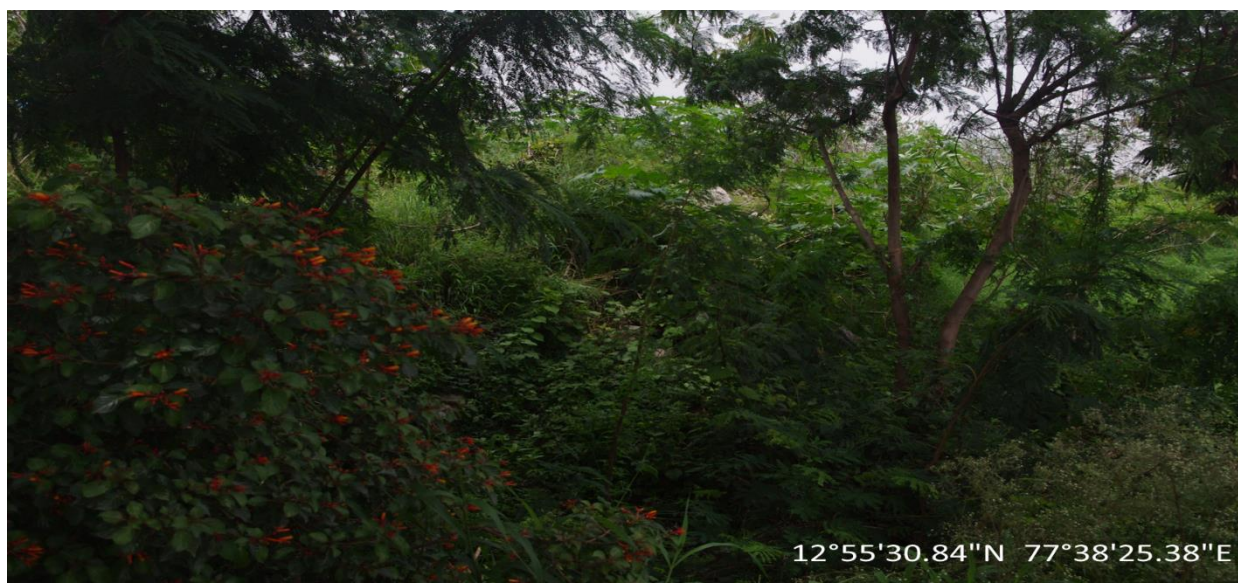


Figure 7: Channel at the site (Dated 2 September 2017, Location: 12°55'30.84"N, 77°38'25.38"E)

Causal Factor 3 – Erection of compound wall: The compound walls were erected in the wetlands region, hindering flow of water. These structures violating the hydrologic regime as (i) the compound walls inside wetlands restrict the movement of water from upstream to downstream, (ii) compound wall is being built (after filling and altering the topography) altering the wetlands physical integrity. Figure 8 depicts the Compound walls on Google earth. Figure 9 depicts the status of compound walls in 2014 and 2017. IT can be observed that a new boundary has been erected in 2017, but the land is seeming not be rejuvenated to the original status.



Figure 8: Compound Wall on Google Earth



Figure 9: Compound Wall and Building in the buffer zone

Causal Factor 4: Narrowing and Concretisation of storm water drains

Storm water drains – implications of concretization: Impaired Ecosystem Functions - bioremediation and groundwater recharge (but maximization of benefits to consultants with frequent floods)

During the field work on 1 May 2017 along with CEO, KLCDA it was observed

- vi) Rajakaluve (storm water drain) connecting Bellandur lake from city market side is narrowed to 28.5 m against the original width of 60 m and also violating recent NGT guidelines. This is mainly to help the encroachers of storm water drains while bypassing NGT's guidelines of storm water drain buffer regions
- vii) Concretisation of storm water – this would affect the hydrological functional ability of storm water drains – ground water recharge, remediation and flood mitigation
- viii) Concretization and narrowing the drains has only enhanced the flooding in the city, observed recently (15th August 2017, 24th August 2017).
- ix) BBMP while wasting the public money has made Bangalore landscape vulnerable with frequent floods.

Figure 10 shows revenue map of Jakkasandra village which is in the upstream of Bellanduru lake. Figure 11 illustrates narrowed width of rajakaluve between 1908 and 2017. It can be noted that nearly 50% of the channel width is reduced and has been concretized.

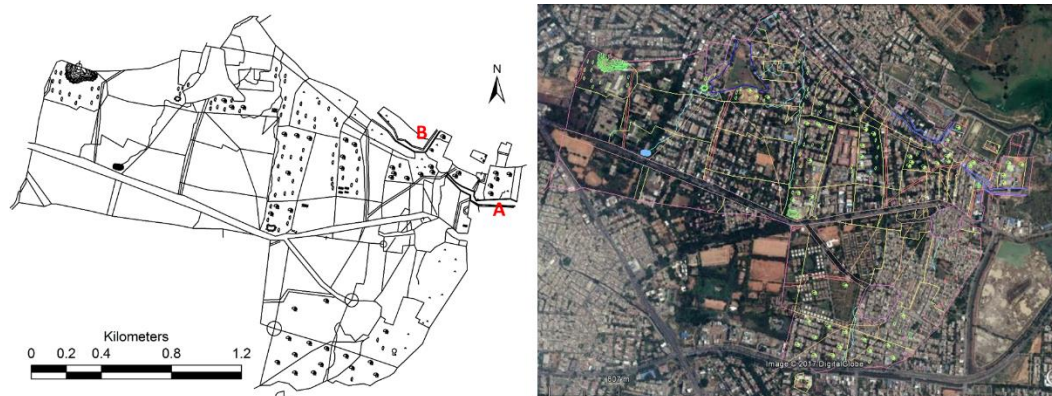


Figure 1: Jakkasandra Village map
(Note : A indicates the Rajakaluve's measured for change in width)

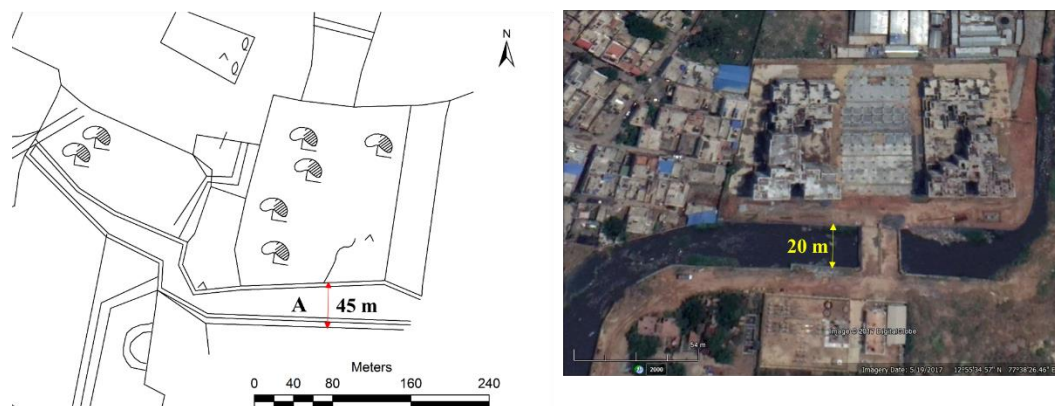


Figure 11: Rajakaluve A: from Agara Lake to Bellandur Lake

The need for sensible interventions.

1. Drains (trapezoidal) are to be designed in the city to optimise natural hydrological principles;
2. No concretization of drain bed – natural bed (soil) would help in (i) retarding velocity, (ii) infiltration – recharge of ground water resources. This would help in mitigating floods. Soil also acts as membrane and aids in remediation, preventing the contamination of ground water resources;
3. Concretisation of storm water drain would increase the quantity of water flow (due to absence of infiltration) and enhances water velocity (10-12 times, Refer Table 1.2). This would certainly increases the city's flooding vulnerability with high intense rainfall coupled with the increase in paved surfaces (78% of Bangalore land surface is paved!). Consequent of this would be higher instances of flooding with the damages to the property and human life;
4. Let the drain walls be either stone pitched (for structural stability) or turfed with grasses depending on the location;
5. Chain link fences to prevent un-authorized occupation of drains and also dumping of wastes;
6. Evolve appropriate policy mechanisms to make dumping of solid waste, construction and demolition waste in the drains and lakebed cognizable and non-bailable offence;
7. Make drain and lakebed encroachments as cognizable and non-bailable offence and imprisonment of 12 months;

8. Strengthen legal cell in BBMP to address all illegalities (nexus of mafia - contractors, engineers, etc.) as well as encroachments;

Need to move away from contractor with consultant driven design to maximise individual gains (through cement concretization etc.) -Estimate of Rs 8 crore per kilometer of drain is too exorbitant and waste of public money.

Open Channels Flow: Flow of fluids in natural or manmade channels whose surface is exposed to the atmosphere and flow is due to gravitational force are referred to as open channel flow. In order to understand the channels capabilities or designing the channels, Manning's equation is generally used. Mannings equation is a function of channels physical properties such as wetted perimeter, cross sectional area, bed slope, bed material, depth of flow, *etc.*

Manning's equation for velocity of flow is given by :

$$V = \frac{k}{n} R^{\frac{2}{3}} S^{\frac{1}{2}}$$

Where

V is the velocity of flow in the channel as m/s

k is constant (1 for SI units and 1.46 for FPS units),

n is Manning's roughness coefficient (Table 1.1).

R is the hydraulic radius which is defined as the ratio of Cross sectional area (A) to Wetted Perimeter (P)

$$R = \frac{A}{P}$$

S is the bed slope of the channel.

Discharge (Q) cum/s is quantified as function of Area (A) sq.m and Velocity (V) m/s

$$Q = A.V$$

Table 1.1: Manning's Roughness coefficient (n)

Type of Channel and Description	Minimum	Normal	Maximum
Natural streams - minor streams (top width at flood stage < 100 ft)			
1. Main Channels			
a. clean, straight, full stage, no rifts or deep pools	0.025	0.030	0.033
b. same as above, but more stones and weeds	0.030	0.035	0.040
c. clean, winding, some pools and shoals	0.033	0.040	0.045
d. same as above, but some weeds and stones	0.035	0.045	0.050
e. same as above, lower stages, more ineffective slopes and sections	0.040	0.048	0.055
f. same as "d" with more stones	0.045	0.050	0.060

g. sluggish reaches, weedy, deep pools	0.050	0.070	0.080
h. very weedy reaches, deep pools, or floodways with heavy stand of timber and underbrush	0.075	0.100	0.150
2. Mountain streams, no vegetation in channel, banks usually steep, trees and brush along banks submerged at high stages			
a. bottom: gravels, cobbles, and few boulders	0.030	0.040	0.050
b. bottom: cobbles with large boulders	0.040	0.050	0.070
3. Floodplains			
a. Pasture, no brush			
1. short grass	0.025	0.030	0.035
2. high grass	0.030	0.035	0.050
b. Cultivated areas			
1. no crop	0.020	0.030	0.040
2. mature row crops	0.025	0.035	0.045
3. mature field crops	0.030	0.040	0.050
c. Brush			
1. scattered brush, heavy weeds	0.035	0.050	0.070
2. light brush and trees, in winter	0.035	0.050	0.060
3. light brush and trees, in summer	0.040	0.060	0.080
4. medium to dense brush, in winter	0.045	0.070	0.110
5. medium to dense brush, in summer	0.070	0.100	0.160
d. Trees			
1. dense willows, summer, straight	0.110	0.150	0.200
2. cleared land with tree stumps, no sprouts	0.030	0.040	0.050
3. same as above, but with heavy growth of sprouts	0.050	0.060	0.080
4. heavy stand of timber, a few down trees, little undergrowth, flood stage below branches	0.080	0.100	0.120
5. same as 4. with flood stage reaching branches	0.100	0.120	0.160
4. Excavated or Dredged Channels			
a. Earth, straight, and uniform			
1. clean, recently completed	0.016	0.018	0.020
2. clean, after weathering	0.018	0.022	0.025
3. gravel, uniform section, clean	0.022	0.025	0.030
4. with short grass, few weeds	0.022	0.027	0.033
b. Earth winding and sluggish			
1. no vegetation	0.023	0.025	0.030
2. grass, some weeds	0.025	0.030	0.033
3. dense weeds or aquatic plants in deep channels	0.030	0.035	0.040
4. earth bottom and rubble sides	0.028	0.030	0.035
5. stony bottom and weedy banks	0.025	0.035	0.040
6. cobble bottom and clean sides	0.030	0.040	0.050
c. Dragline-excavated or dredged			
1. no vegetation	0.025	0.028	0.033
2. light brush on banks	0.035	0.050	0.060
d. Rock cuts			
1. smooth and uniform	0.025	0.035	0.040

2. jagged and irregular	0.035	0.040	0.050
e. Channels not maintained, weeds and brush uncut			
1. dense weeds, high as flow depth	0.050	0.080	0.120
2. clean bottom, brush on sides	0.040	0.050	0.080
3. same as above, highest stage of flow	0.045	0.070	0.110
4. dense brush, high stage	0.080	0.100	0.140
5. Lined or Constructed Channels			
a. Cement			
1. neat surface	0.010	0.011	0.013
2. mortar	0.011	0.013	0.015
b. Wood			
1. planed, untreated	0.010	0.012	0.014
2. planed, creosoted	0.011	0.012	0.015
3. unplaned	0.011	0.013	0.015
4. plank with battens	0.012	0.015	0.018
5. lined with roofing paper	0.010	0.014	0.017
c. Concrete			
1. trowel finish	0.011	0.013	0.015
2. float finish	0.013	0.015	0.016
3. finished, with gravel on bottom	0.015	0.017	0.020
4. unfinished	0.014	0.017	0.020
5. gunite, good section	0.016	0.019	0.023
6. gunite, wavy section	0.018	0.022	0.025
7. on good excavated rock	0.017	0.020	
8. on irregular excavated rock	0.022	0.027	
d. Concrete bottom float finish with sides of:			
1. dressed stone in mortar	0.015	0.017	0.020
2. random stone in mortar	0.017	0.020	0.024
3. cement rubble masonry, plastered	0.016	0.020	0.024
4. cement rubble masonry	0.020	0.025	0.030
5. dry rubble or riprap	0.020	0.030	0.035
e. Gravel bottom with sides of:			
1. formed concrete	0.017	0.020	0.025
2. random stone mortar	0.020	0.023	0.026
3. dry rubble or riprap	0.023	0.033	0.036
f. Brick			
1. glazed	0.011	0.013	0.015
2. in cement mortar	0.012	0.015	0.018
g. Masonry			
1. cemented rubble	0.017	0.025	0.030
2. dry rubble	0.023	0.032	0.035
h. Dressed ashlar/stone paving	0.013	0.015	0.017
i. Asphalt			
1. smooth	0.013	0.013	
2. rough	0.016	0.016	

j. Vegetal lining	0.030		0.500
Manning's n for Closed Conduits Flowing Partly Full (Chow, 1959).			
Type of Conduit and Description	Minimum	Normal	Maximum
1. Brass, smooth:	0.009	0.010	0.013
2. Steel:			
Lockbar and welded	0.010	0.012	0.014
Riveted and spiral	0.013	0.016	0.017
3. Cast Iron:			
Coated	0.010	0.013	0.014
Uncoated	0.011	0.014	0.016
4. Wrought Iron:			
Black	0.012	0.014	0.015
Galvanized	0.013	0.016	0.017
5. Corrugated Metal:			
Subdrain	0.017	0.019	0.021
Stormdrain	0.021	0.024	0.030
6. Cement:			
Neat Surface	0.010	0.011	0.013
Mortar	0.011	0.013	0.015
7. Concrete:			
Culvert, straight and free of debris	0.010	0.011	0.013
Culvert with bends, connections, and some debris	0.011	0.013	0.014
Finished	0.011	0.012	0.014
Sewer with manholes, inlet, etc., straight	0.013	0.015	0.017
Unfinished, steel form	0.012	0.013	0.014
Unfinished, smooth wood form	0.012	0.014	0.016
Unfinished, rough wood form	0.015	0.017	0.020
8. Wood:			
Stave	0.010	0.012	0.014
Laminated, treated	0.015	0.017	0.020
9. Clay:			
Common drainage tile	0.011	0.013	0.017
Vitrified sewer	0.011	0.014	0.017
Vitrified sewer with manholes, inlet, etc.	0.013	0.015	0.017
Vitrified Subdrain with open joint	0.014	0.016	0.018
10. Brickwork:			
Glazed	0.011	0.013	0.015
Lined with cement mortar	0.012	0.015	0.017
Sanitary sewers coated with sewage slime with bends and connections	0.012	0.013	0.016
Paved invert, sewer, smooth bottom	0.016	0.019	0.020
Rubble masonry, cemented	0.018	0.025	0.030
Manning's n for Corrugated Metal Pipe (AISI, 1980).			
Type of Pipe, Diameter and Corrugation Dimension	n		
1. Annular 2.67 x 1/2 inch (all diameters)	0.024		
2. Helical 1.50 x 1/4 inch			

8" diameter	0.012
10" diameter	0.014
3. Helical 2.67 x 1/2 inch	
12" diameter	0.011
18" diameter	0.014
24" diameter	0.016
36" diameter	0.019
48" diameter	0.020
60" diameter	0.021
4. Annular 3x1 inch (all diameters)	0.027
5. Helical 3x1 inch	
48" diameter	0.023
54" diameter	0.023
60" diameter	0.024
66" diameter	0.025
72" diameter	0.026
78" diameter and larger	0.027
6. Corrugations 6x2 inches	
60" diameter	0.033
72" diameter	0.032
120" diameter	0.030
180" diameter	0.028

Source: www.fsl.orst.edu/geowater/FX3/help/8_Hydraulic_Reference/Mannings_n_Tables.htm

DESIGN – ILLUSTRATION OF NATURAL DRAINS SUPREMACY

Highest rainfall in a day was observed to be 109 mm in the year 2013 (as recorded between 31st May 2013 8:30 AM and 1st June 2013 8:30 AM), w.r.t which an yield of 1022 kilo.cum of water is generated. Considering that the rainfall has occurred within 6 hours, Discharge would be about 47.31 cum/s. Open channels along the valley zones should be able to carry the discharge of 47.31 cum/s, without clogging or surpassing the flood plain.

In order to quantify the discharge along the channel, various scenarios were observed, i.e., current width of which is about 7 to 8 meters in width, and width as per cadastral maps along with various bed characteristics such as concrete bed, soil bed and bed with vegetation., details are as presented in table 1.2.

The analysis of Channels shows that in the current scenario, where the channel width is about 7 – 8 meters in width, has a capacity to carry discharge of 51.47 cum/s at minimum roughness coefficient of 0.40 for channels with presence of weeds/reeds and stones along the beds indicating that the channels would easily cater to the exiting discharge of 47.31 cum/s.

Table 1.2: Analysis of the Channels

Scenario	As per Revenue map			Current Scenario		
Channel width top (m)	15			8		
Channel width bottom (m)	12			6		
Depth (m)	2.0			2.5		
Side Slope	0.75			0.4		
Area (sq.m)	30.0			20		
Perimeter (m)	17.0			11.4		
Hydraulic Radius (m)	1.8			1.8		
Channel Slope S	0.005			0.005		
Bed Type	Veg	Soil	Concrete	Veg	Soil	Concrete
n (min)	0.05	0.023	0.015	0.040	0.023	0.015
n (normal)	0.07	0.025	0.017	0.048	0.025	0.017
n(max)	0.08	0.03	0.02	0.055	0.030	0.020
V (max) m/s	2.07	4.49	6.88	2.57	4.48	6.86
V (normal) m/s	1.48	4.13	6.07	2.14	4.12	6.06
V (min) m/s	1.29	3.44	5.16	1.87	3.43	5.15
Q (max) cum/s	61.96	134.69	206.52	51.47	89.52	137.26
Q (normal) cum/s	44.25	123.91	182.22	42.89	82.36	121.11
Q (min) cum/s	38.72	103.26	154.89	37.44	68.63	102.95

Velocity estimates indicate that presence of vegetation along with other bed materials (Soil, stones) would help in reducing velocity of flow. In the existing scenario, flow velocity was estimated to be 1.87 to 2.57 m/s, compared to soil bed or concrete bed which has lower friction where the velocity ranges were between 3.43 to 6.86 m/s.

If the drainages were reclaimed as per the cadastral maps, the width of the channel would be around 15 to 18 meters, considering maximum flow depth as 2 meters, channel with natural vegetation (reeds and weeds) would have low flow velocities between 1.29 to 2.07 m/s which is much lower as against the current scenario, and with discharges upto 61.96cum/s, indicating that the valley in its natural condition had a higher sewage carrying potential even with lower depth of flow.

Studies showing relation between Bed material and Surface flows: Studies carried by Nepf in 2012, Miyab et al 2014, Miyab et al 2015, Morri et al 2016, Jarvella, 2002, Green 2005, highlights the role of vegetation on the river channels:

- 1) Vegetation forms an integral part of the ecosystem providing goods and services (biological, geomorphological, landscape ecology, chemistry), ecological trapping.
- 2) Vegetation uptakes nutrients (nitrogen and phosphorous), increase oxygen levels and helps in betterment of water quality.
- 3) Vegetation is known to increase bank stability, reduce erosion and turbidity, provide habitat for aquatic and terrestrial wildlife, attenuate floods, present aesthetic properties, and filter pollutants.
- 4) Vegetation increases resistance to flow, influence water depth, alters mean velocity.
- 5) Presence of vegetation alters flow velocities across several scales, ranging from branches to blades of a single plant to cluster of plants.
- 6) Since time immemorial (before the birth of current breed of senseless consultants and civil engineers with fragmented knowledge of the subject) aquatic vegetation was considered for flow retardation, local treatment of water, groundwater recharge – without any contamination).
- 7) Surface flow velocities was maximum on sections with bare banks, whereas maximum flow velocity occurs under the water surface in both vegetative and open channels.
- 8) Vegetation cover changes uniform flow to non-uniform flow, showing a nonlinear distribution of Reynolds stress
- 9) Aquatic plants are flexible, they can be pushed over by currents, resulting in change in morphology called reconfiguration
- 10) Reconfiguration also reduces flow resistance
 - a. Reduces the frontal area of the vegetation
 - b. Reconfigured shape tends to be more streamlined
- 11) Drag on a plant increases more slowly with velocity.
- 12) Vegetation reduced the variation of drag
- 13) Vegetation growing in waterways and rivers increase turbulence
- 14) Within a cluster/Canopy, flow is forced to move around each branch or blade, so that the velocity field is spatially heterogeneous.
- 15) Flow resistance due to vegetation is determined primarily by the blockage factor, A strong correlation exists between blockage factor and Mannings roughness coefficient.
- 16) Vegetation is flexible, an increase in velocity is associated with a decrease in vegetation height
- 17) Vegetation drag increases with increasing depth ratio if plants area emergent, and if plants are submerged hydraulic resistance decreases.
- 18) Baffling of flow reduces bed stresses and vegetation creates region of sediment retention, enhances retention of organic matter, nutrients and heavy metals.
- 19) Because of the positive impacts vegetation provides for water quality, habitat and channel stability, researchers now advocate replanting and maintenance of vegetation in rivers.
- 20) Presence of vegetation in the beds mitigate bed souring, reducing bed impact.
- 21) In many vegetated flows, the near bed turbulent stress is zero, or close to zero.

22) In the recent years, vegetation has become a major component of erosion control and stream restoration

Solutions:

- Vegetation in the drain takes the load during peak monsoon, there is no need to concretise the channel (and waste public money)
- Vegetation allows groundwater recharge while treating the water (bioremediation);
- Drains with vegetation without any bottlenecks (hindrances) would be the best option to mitigate floods.
- Narrowing channel and concretizing would only increase the quantum of water and velocity, which would be disastrous.
- Objective should be towards mitigation of floods and not to generate high overland flows (with increased quantum and flow velocity)
- Experts should think sensibly with holistic knowledge (considering all subject knowledge) than fragmented narrow sectorial knowledge. Advice by pseudo experts would be detrimental as the society would be deprived of ground water, frequent floods and unnecessary livelihood threats.

Reference

Nepf, Heidi M., 2012, Hydrodynamics of Vegetated Channels. *Journal of Hydraulic Research* 50(3) pp: 262-279.

Miyab, N. M., Afzalimehr, H., Singh, V. P., 2015, Experimental Investigation of Influence of Vegetation on Flow Turbulence, *International Journal of Hydraulic Engineering*, 4(3), pp: 54 – 69, DOI: 10.5923/j.ijhe.20150403.02

Miyab, N. M., Afzalimehr, H., Singh, V. P., Ghorbani, B., 2014, On Flow Resistance Due to Vegetation in a Gravel-Bed River, *International Journal of Hydraulic Engineering*, 3(3), pp: 54 – 69, DOI: 10.5923/j.ijhe.20140303.02

Morrie, M., Soulamia, A., Belleudy, P., 2016, Mean Velocity Predictions in Vegetated Flows, *Journal of Applied Fluid Mechanics*, 9(3), pp: 1273-1283

Marjoribanks, T. I., Hardy, R. J., Lane, S. N., Tancock, M. J., 2017, Patch-scale representation of vegetation within hydraulic models, *Earth Surface Processes and Landforms*, 42, pp: 699 – 710, DOI: 10.1002/esp.4015

Jarvela, J., 2002., Flow resistance of flexible and stiff vegetation: a flume, study with natural plants. *Journal of Hydrology*, 269: 44–54.

Green, J. C. 2005. Modelling flow resistance in vegetated streams: review and development of new theory. *Hydrological Processes* 19: 1245–1259

CAUSAL FACTOR 5: LOSS OF INTERCONNECTIVITY AMONG LAKES

The undulating terrain (varying from about 700 m to about 962 m AMSL) in the region aided in the formation of interconnected lakes in the region (Figure 2.2). Bangalore City was once aptly known as ‘city of lakes’ due to the presence of large number of lake (about 285 lakes in an area of 161 sq km, Spatial extent of Bangalore in 1980’s). These lakes were all interconnected with canals / drains (*kaluveys*’s) to enable transferring excess water to the next lake. These lakes catered the basic needs such as maintaining and recharging ground water, drinking water to the surrounding people, habitat for fishes and other aquatic ecosystems, sustaining food (fish, etc.) and agricultural activities, etc.

The drainage network in Bangalore carries water to the River Cauvery through its tributaries Arkavathi, Pinakini or Pennar and Shimsha. The central, northern and eastern portion is undulating with the upland tracts occupied by scrubs, while the low lands occupied by series of tanks formed by embanking the streams along the valley. These valleys consists of varying size water bodies from small ponds to large lakes. The southern portion of the land consists of hills that are close together and are surrounded by thick jungles.

Bangalore being located on the ridge, forms three watersheds as precipitation flows as runoff in three directions along the valleys (Figure 2.2) - Koramangala Challaghatta Valley (K&C Valley), Hebbal Valley (H Valley) and the Vrishabhavati Valley (V Valley). Under the administrative boundary of Bruhat Bengaluru, K&C valley is the largest encompassing an area of 255 square kilometers, followed by Hebbal valley with an area of 207 square kilometers and Vrishabhavati valley with an area of 165 square kilometers. Both K&C valley and Hebbal valley joins at Nagondanahalli village (**BBMP Ward 94** – Hagadur) which further flow to Dakshina Pinakini River, where as Vrishabhavati valley joins Arkavathi river which is a tributary of river Cauvery.

During 1800, there were 1452 water bodies with the storage capacity of 35 TMC (in the current spatial extent of 741 sq.km.). The number of lakes in Bangalore has reduced from nearly 285 (spatial extent of Bangalore: 161 sq.km. in early seventies) to 194 (spatial extent of Bangalore: 741 sq.km. in 2006). Unplanned rapid urbanisation during late nineties, witnessed large-scale unrealistic, uncontrolled developmental activities in the neighborhood of lakes, which led to

- (i) encroachment of lakes and storm water drains resulting in decline in ground water table, while increasing the instances of flooding;
- (ii) dumping of solid waste (MSW), Construction debris, etc. in storm water drains, lake catchment and in lakes.;
- (iii) sustained inflow of partially or untreated sewage, polluting existing surface and subsurface water resources;
- (iv) reduced water holding capacity due to accumulation of silt; construction debris, etc.;
- (v) topography alterations in the lake catchment; and
- (vi) sustained inflow of untreated industrial effluents.

During the last four decades there has been 79% reduction in water bodies and the number of lakes in Bangalore is given in Figure 12. Loss of interconnectivity is evident in Figure 13 due to encroachments.

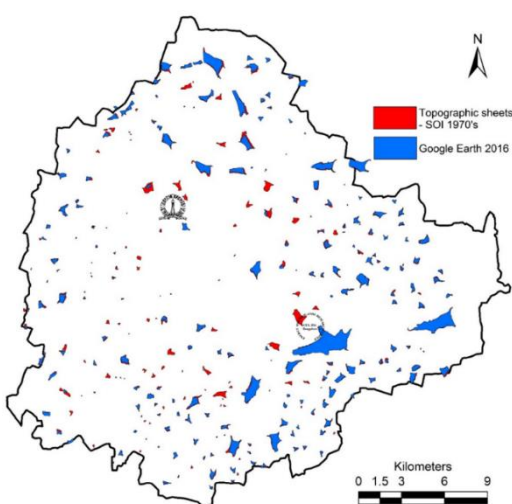


Figure 12: Status of Lake in Bangalore (Red colour indicate lost lakes between 1970's to 2016)

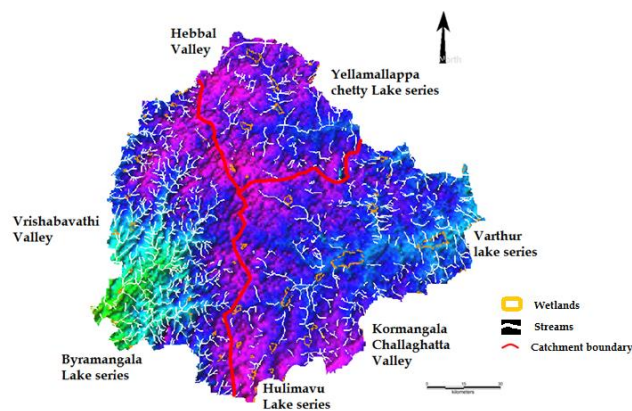


Figure 13: Loss of interconnectivity among lakes

2.0 BANGALORE: CITY OF LAKES

Most efficient way of rainwater harvesting is through lakes, which also help in mitigating floods, ground water recharge and sustain local livelihood (fish, fodder, etc.)

Bangalore (Figure 2.1) is located in the Deccan plateau, toward the south east of Karnataka state extending from 12°49'5"N to 13°8'32"N in latitude and 77°27'29" E to 77°47'2"E in longitude. Bangalore city is/was known with various names such as "GANDU BHOOMI" (land of heroes), "BENDAKAALURU" (land of boiled beans), "LAND OF LAKES" where a large number of lakes were constructed to store water, during the regime of Kings and British, along with it, numerous parks, gardens were created such as Lalbagh, Cubbon park etc. which gained the city with name "GARDEN CITY". Taking the advantage of undulating terrain, earlier rulers had created inter connected water bodies (during 1800) to meet the drinking water and irrigation water requirement. There were 1452 water bodies in the current spatial extent (741 sq.km.) of Bangalore. Post-independence due to industrialization, growth in technology and science, the city acquired "Silicon Valley" status and provided job opportunities. However, during post independent era, with globalization the city lost its glory due to unplanned, unrealistic and irresponsible urbanisation.

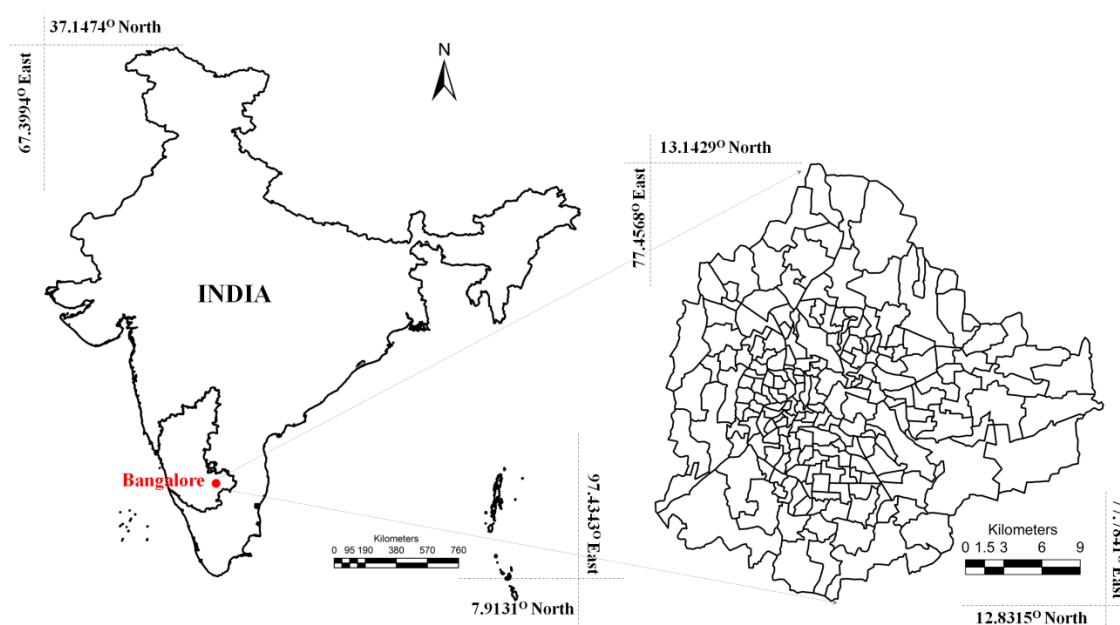


Figure 2.1: Bangalore (Bengaluru) City

Growth of Bangalore from *Pete's* to Bruhat Bengaluru: Bangalore, the pride to India as the garden and cool city, is about 500 years old has grown from a small time settlement when Kempe Gowda, the architect of Bengaluru, built a mud fort in 1537 and his son marked the city boundaries by erecting four watch towers. Within the fort the town was divided into *pete's* (commercial localities) such as Chickpete, Dodpete, Balepete, Cottonpete and other areas earmarked for different trades and artisans. The town had two main streets, Chickpete Street ran east to west and Dodpete Street ran north to south, their intersection forming Dodpete Square, the heart of Bangalore. Chikkadeva Raya Wodeyar (1673 AD- 1704 AD) built an oval shaped fort south of the old mud fort. Later, Hyder Ali took over the throne until the British defeated him in 1790. During this period, the oval fort in the south was rebuilt with stone and palace was built within the fort, the town was about 5 kilometer's in circumference, with the fort at the south end, with well-planned streets and prosperous shops indicating a flourishing economy. A big market stretched from the north gate of the town to the oval fort, a predecessor of today's Avenue Road. Hyder Ali and Tippu Sultan also contributed towards the beautification of the city by building Lalbag Garden in 1760 AD, developed Bangalore into a commercial and military centre of strategic importance. The British after defeating Hyder Ali and Tippu Sultan, ceased Bangalore as strategic stronghold and built military base and cantonment in the city. Sooner Bangalore fort slowly passed into extinction, while the fort walls coming down in stages to make way for the expanding city. The Parade Ground, surrounded by a ride or mall called Rotten Row, was more or less the heart of Bangalore Cantonment. Around this, the Civil & Military Station (CMS) was developed. A civilian population of lower economic strata, attracted by the opportunities for employment and trade and offering subsidiary services to the military personnel, settled in a high density and congested locality. This area evolved into a general bazaar called Blackpally, today's Shivajinagar. During the British rule, several developments, led to the rapid growth of the city. The most important of these being the telegraph connections introduced to and from Bangalore to all the important cities of India in 1853 AD and the rail connection to Madras in 1864 AD. Hence, with city walls receding, giving way to an unprecedented growth with sprawl at outskirts. By 1881 AD, Bangalore had two nuclei: one a high-density area around the fort and its market (K.R. Market area) in *pete* and the second Blackpally (Russel Market area) within the colonial city. Both of these comprised the inner city of Bangalore with Cubbon Park acting as a large green buffer. Several suburbs were built, by 1931 AD the CMS's population was 134,113 and that of Bangalore was 308,000. Post-

Independence the colonial cities were merged in 1949 since then Bangalore was retained the capital of Karnataka state. Bangalore continued to grow and several public sector industries were setup between 1940 and 1970 transforming the city to science and technology centre. By 1961, Bangalore had become the 6th largest city in India with a population of 1,207,000. Between 1971 and 1981, Bangalore's growth rate was 76%, the fastest in Asia. By 1988 the Electronic City had been developed and Bangalore emerged as India's software capital. Consequently the 1990's saw a construction boom fuelled by Bangalore's growing reputation as "India's silicon valley". Since the construction boom, many legal and illegal activities/developments has led to increase in land conversion from one form to constructed and paved surfaces violating the norms (CDP's). Table 2.1 lists chronologically the increase in city's spatial extent since 1700 (<http://www.karnataka.com>; <https://archive.org/details/BangaloreGazetteer1875>).

Table 2.1: Spatial increase of Bangalore city

Era	Year	Area in sq.km
Hyder Ali and Tippu Sultan	1700 - 1790	2
British	1800 - 1947	69
Mysore	1951	69
BDA	1963 - 1964	112
BDA	1969	134
BDA	1979	161
BDA	1995	226
BBMP	2006	696
BBMP	2011	741

The decadal (during 2001 to 2011) increase in population for urban areas of India is 31.8% and in Karnataka is 31.5%, but Bangalore has a decadal increase of 44%, higher compared to that of the state and country. The decadal population (w.r.t BBMP limits) has increased from 5.8 Million (in 2001) to 8.4 Million (in 2011); the population density has increased from 7880 persons per square kilometer to over 11330 persons per square kilometer. Characterized by undulating topography with green cover and water bodies, the temperature varies from 22°C to 38°C during summer and 14°C to 27°C in winter. Bangalore receives an annual average rainfall of 800 mm. The undulating terrain (varying from about 700 m to about 962 m AMSL) in the region aided in the formation of interconnected lakes in the region.

Geologically, the prevailing rocks are light to dark grey Biotite Granitic Gneiss and varies from place to place in texture, structure and appearance based on the fineness or coarseness of the grains, mode of disposition of dark minerals. The dark minerals are mostly biotite mica are generally arranged in parallel orientation, the light coloured are silicious minerals. The gneissic rocks have portions of uniform granitic texture; these gneissic masses have been styled as ‘Peninsular Gneiss’. Schist’s are not prominent, but isolated stringers of dark hornblend granulite are with light green pyroxene rocks. Other rocks include the dykes and dolerites. Kaolin is a good variety of clay, found in the silts of the lake (<http://www.geosocindia.org>).

Bangalore City was once aptly known as ‘city of lakes’ due to the presence of large number of lake (about 285 lakes). These lakes were all interconnected with canals / drains (*kaluveys*’s) to enable transferring excess water to the next lake. These lakes catered the basic needs such as maintaining and recharging ground water, drinking water to the surrounding people, habitat for fishes and other aquatic ecosystems, sustaining food (fish, etc.) and agricultural activities, etc.

The drainage network in Bangalore carries water to the River Cauvery through its tributaries Arkavathi, Pinakini or Pennar and Shimsha. The central, northern and eastern portion is undulating with the upland tracts occupied by scrubs, while the low lands occupied by series of tanks formed by embanking the streams along the valley. These valleys consists of varying size water bodies from small ponds to large lakes. The southern portion of the land consists of hills that are close together and are surrounded by thick jungles.

Bangalore being located on the ridge, forms three watersheds as precipitation flows as runoff in three directions along the valleys (Figure 2.2) - Koramangala Challaghatta Valley (K&C Valley), Hebbal Valley (H Valley) and the Vrishabhavati Valley (V Valley). Under the administrative boundary of Bruhat Bengaluru, K&C valley is the largest encompassing an area of 255 square kilometers, followed by Hebbal valley with an area of 207 square kilometers and Vrishabhavati valley with an area of 165 square kilometers. Both K&C valley and Hebbal valley joins at Nagondanahalli village (**BBMP Ward 94 – Hagadur**) which further flow to Dakshina Pinakini River, where as Vrishabhavati valley joins Arkavathi river which is a tributary of river Cauvery.

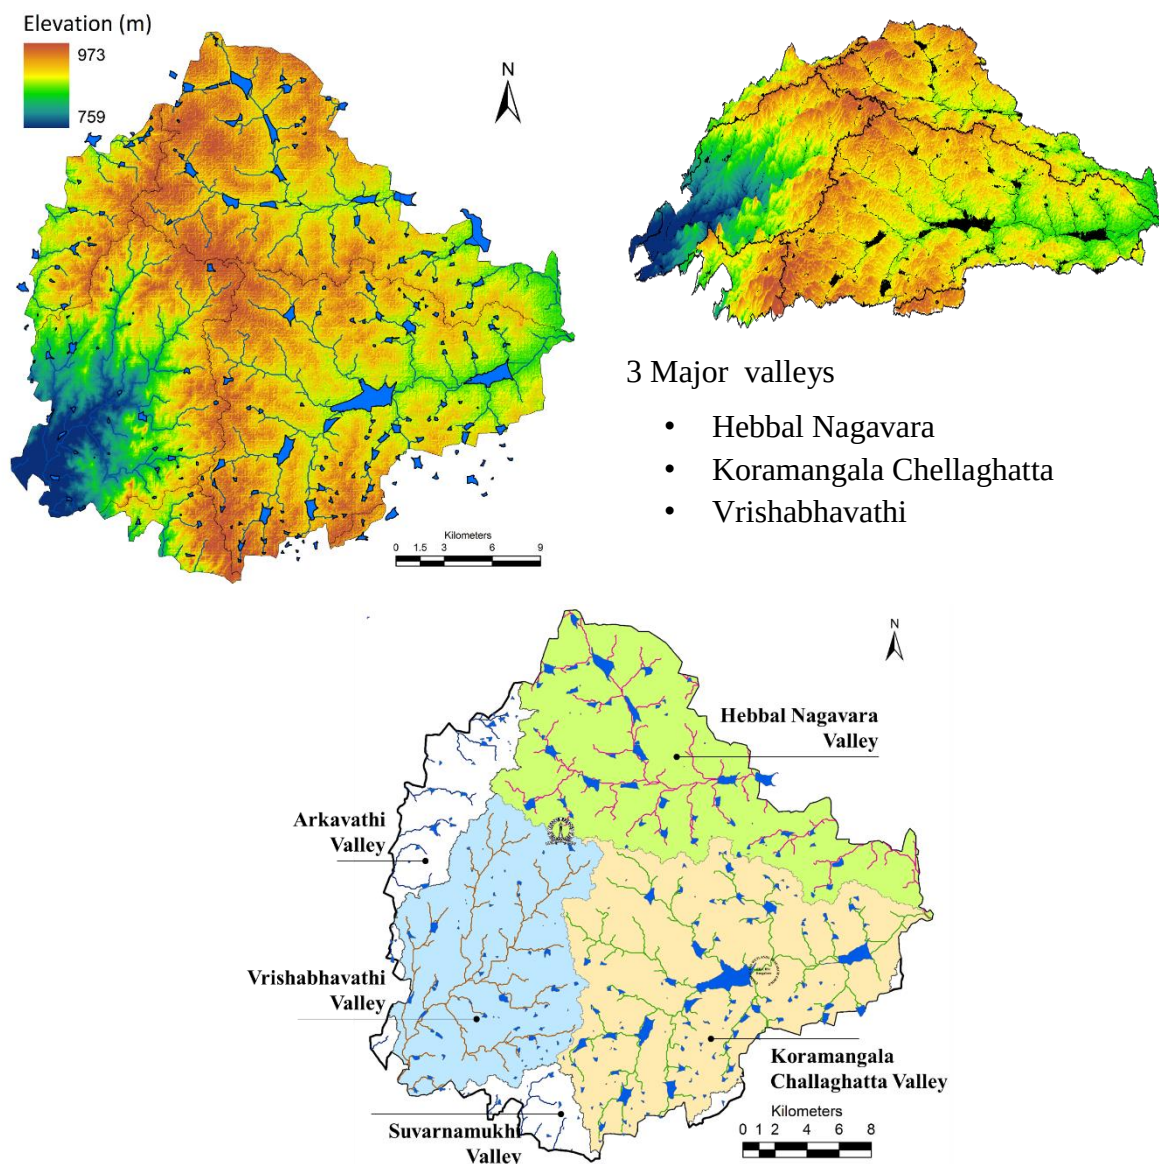


Figure 2.2: River and Lake network along the Major valleys

The number of lakes in Bangalore has reduced from nearly 285 (spatial extent of Bangalore: 161 sq.km. in early seventies) to 194 (spatial extent of Bangalore: 741 sq.km. in 2006). Unplanned rapid urbanisation during late nineties, witnessed large-scale unrealistic, uncontrolled developmental activities in the neighborhood of lakes, which led to

- (vii) encroachment of lakes and storm water drains resulting in decline in ground water table, while increasing the instances of flooding;
- (viii) decline in native species of biota in the lake ecosystem;

- (ix) dumping of solid waste (MSW), Construction debris, etc. in storm water drains, lake catchment and in lakes.;
- (x) sustained inflow of partially or untreated sewage, polluting existing surface and subsurface water resources;
- (xi) reduced water holding capacity due to accumulation of silt; construction debris, etc.;
- (xii) topography alterations in the lake catchment;
- (xiii) sustained inflow of untreated industrial effluents; and
- (xiv) pollution due to enhanced vehicular traffic.

Anthropogenic activities particularly, indiscriminate disposal of industrial effluents and sewage wastes, dumping of building debris have altered the physical, chemical as well as biological integrity of the ecosystem. This has resulted in the ecological degradation, which is evident from the current ecosystem valuation of wetlands. Valuation of goods and services from a relatively pristine wetland in Bangalore shows the value of Rs. 10,435/ha/day (much higher than global coastal wetland ecosystems with a total annual of US\$ 14,785/ha), while the polluted wetland shows the value of Rs.20/ha/day (Ramachandra et al., 2005) and sewage fed Varthur wetland has a value of Rs.119/ha/day (Ramachandra et al., 2011). The pollutants and subsequent contamination of the wetland has telling effects such as disappearance of native species, dominance of invasive exotic species (such as African catfish, water hyacinth, etc.), in addition to profuse breeding of disease.

2.1 RAINFALL IN BANGALORE

Rainfall or precipitation data was collected from 18 monitoring stations (Figure 2.3) maintained by Indian Meteorological Department (IMD) and Directorate of Economics and Statistics – Karnataka between 1901 to 2015. 115 years average rainfall data was considered to understand the rainfall dynamics – spatio temporal variability, etc. in Greater Bangalore (Figure 2.4). Spatial Analysis of rainfall indicates that the western portion of Bangalore receives higher rainfall than the east. Monthly analysis (Figure 2.3, Figure 2.4) of rainfall indicated that rainfall in Bangalore is spread across 7 months i.e., 86.9% of rainfall occurs between the months of May to November, September being the highest with average rainfall of 156 mm (Figure 2.5).

Annual rainfall pattern (Figure 2.6) indicates higher variability in rainfall with respect to mean. The trend line and the moving averages indicate increasing rainfall

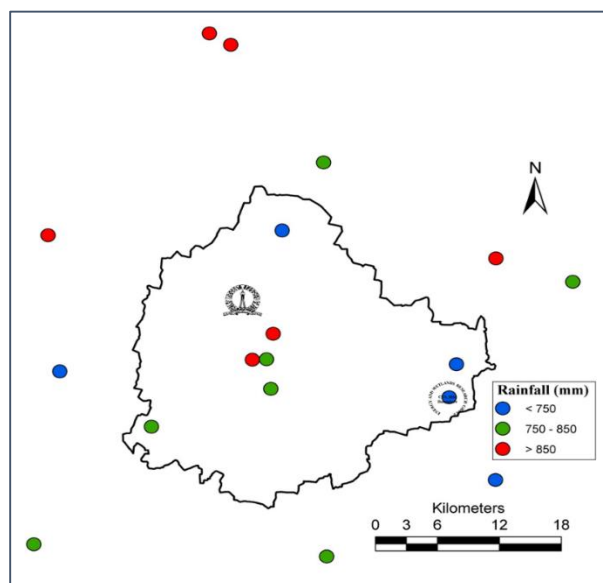


Figure 2.3: Rain gauge stations

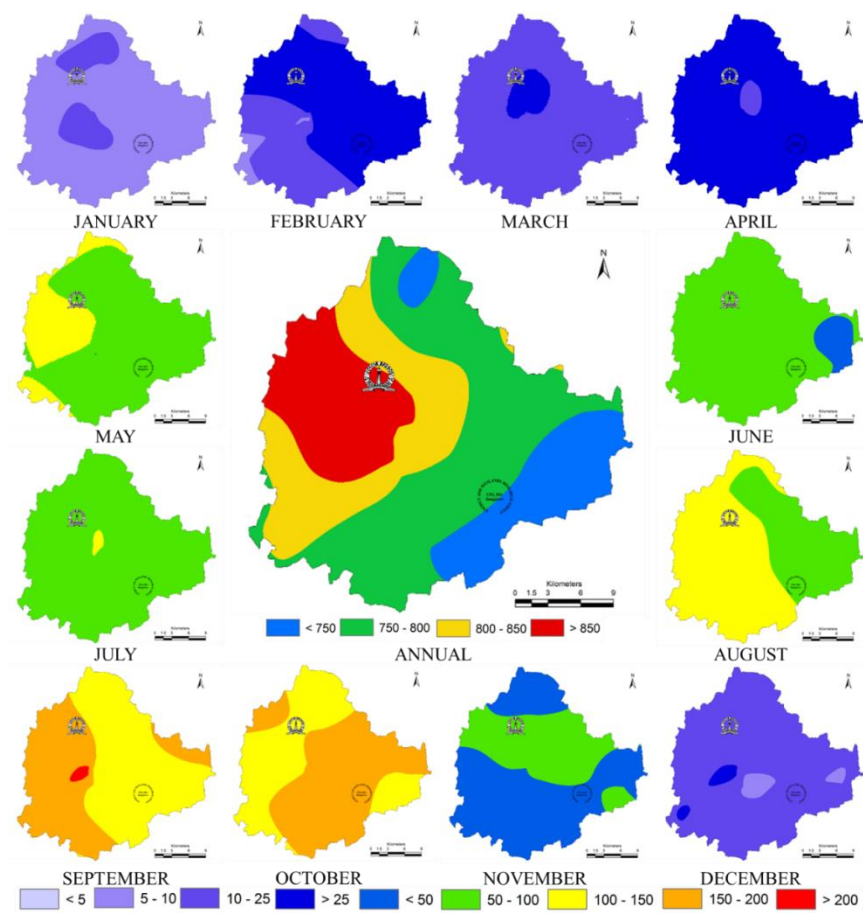


Figure 2.4: Spatial rainfall distribution pattern (all units in mm)

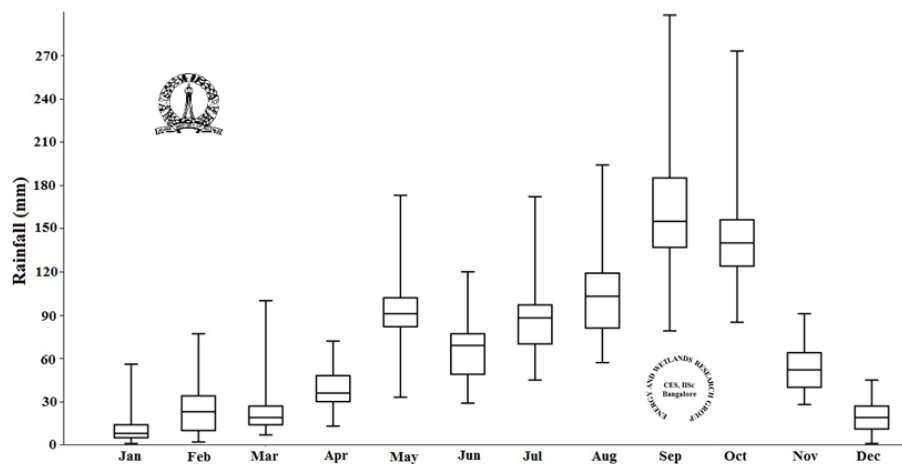


Figure 2.5: Monthly rainfall variations

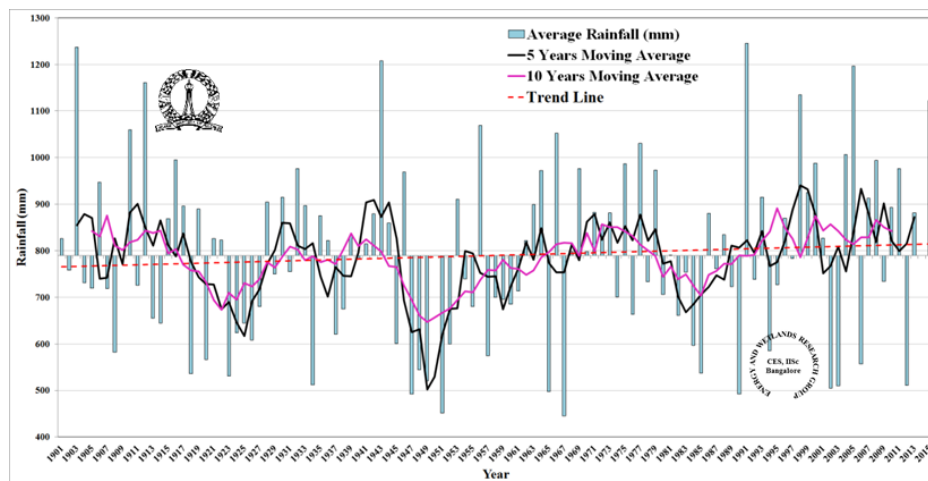


Figure 2.6: Annual rainfall variations (hyetograph)

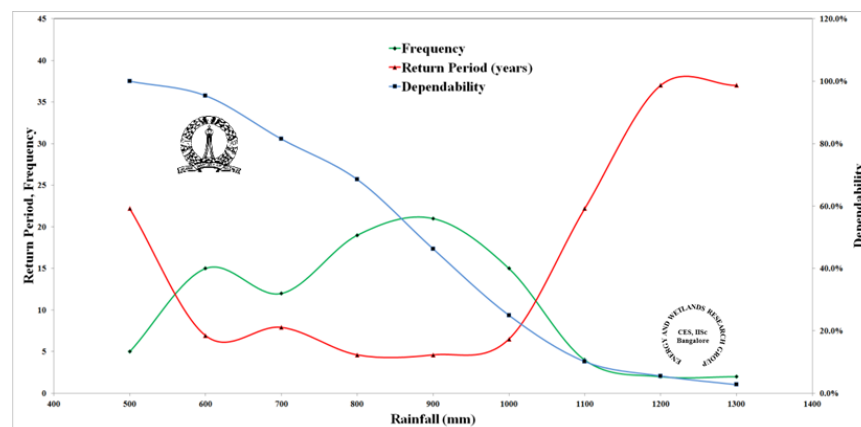


Figure 2.7: Rainfall characteristics - frequency, dependability (%) and return period (years)

Statistical analysis (Figure 2.7, Table 2.1) of annual rainfall indicates that average annual rainfall in Bangalore is 787 mm with 75% dependability and return period of 5 years. The coefficient of variation is 0.23 which indicates that there would be 23% variability in rainfall between consecutive years (<http://dimtecrisk.ufs.ac.za/nc/precipitation.html>). Rainfall distribution as per the IMD classification (<http://www.imd.gov.in>) of rainfall conditions nearly 67.7% of the time at least normal rainfall can be observed in Bangalore, 20.7% drought and 11.7% deficient rainfall conditions. The return period of normal rainfall is 3.5 years.

Table 2.1: Rainfall characteristics

Rainfall (mm)	Frequency	Probability of Occurrence	Dependability	Return Period (years)
500	5	0.05	100.0%	22
600	15	0.14	95.4%	7
700	12	0.13	81.5%	8
800	19	0.22	68.5%	5
900	21	0.22	46.3%	5
1000	15	0.15	25.0%	7
1100	4	0.05	10.2%	22
1200	2	0.03	5.6%	37
1300	2	0.03	2.8%	37
Minimum		445 mm	Maximum	1245 mm
Mean		787 mm	Median	784 mm
Standard Deviation		±184 mm	Coefficient of Variation	0.23
Indian Meteorological Department – Rainfall distribution all India scenario				
Rainfall Distribution	Condition	Rainfall	Probability of Occurrence	Return Period (Year)
Excess	> 10% Average	> 866 mm	0.369	2.7
Normal	± 10% Average	709 – 866 mm	0.288	3.5
Deficient	10% > Average< 20%	630 – 709 mm	0.117	8.5
Drought	20% > Average< 40%	472 – 630 mm	0.207	4.8
Severe Drought	> 60% Average	< 472 mm	0.018	55.5

2.2 WATER YIELD

Runoff yield in Bangalore is calculated spatially based on the empirical equation (eq 1) using GIS

$$Q = C \cdot A \cdot P / 1000 \quad \dots\dots\dots 1$$

(Raghunath, 1985; Subramanya 2005; Ramachandra et al., 2013, Ramachandra et al 2014)

Where, Q = runoff in cubic meters; C = runoff coefficient (depends on land use of each pixel);
 $C = 0.85 - 0.95$ for paved surfaces (Built-up); $C = 0.40 - 0.60$ for open/agriculture and horticulture; A = area (pixel or catchment) in square meters; P = precipitation as mm
 Runoff (mm/year) is depicted in figure 2.8 and higher surface runoff were observed in the localities with higher paved surfaces. Water retaining capacity in the catchment is higher dominated by vegetation cover and water bodies, and with this, lower overland flow or surface run-off were observed during monsoon.

Catchment wise water yield analysis indicates that about 49.5% (7.32 TMC) in the Vrishabhavathi valley (including Arkavathi and Suvarnamukhi), followed by 35.2% (5.2 TMC) in Koramangala Challaghatta valley and 15.3% (4.2 TMC) in Hebbal valley and the total annual water yield is about **14.80 TMC**.

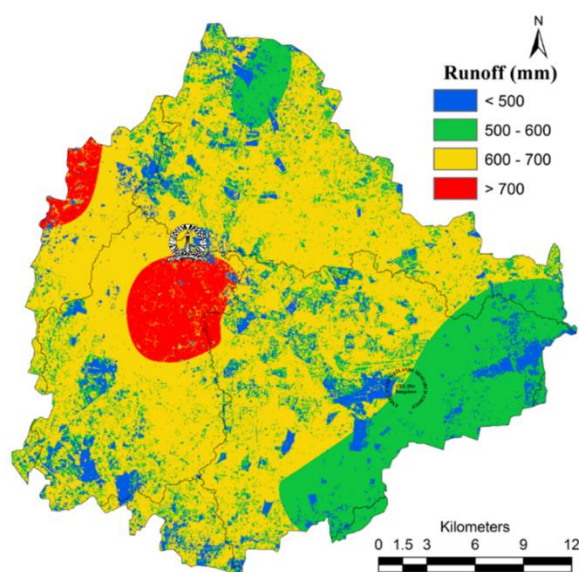


Figure 2.8: Runoff (mm/year) in Bangalore

2.3 STATUS OF LAKES – SCOPE FOR HARVESTING RAINWATER

The number of lakes in Bangalore has reduced from nearly 285 (1970's; spatial extent of Bangalore is 161 sq.km) to 194 (2016; spatial extent is 741 sq.km). During the last four decades there has been 79% reduction in water bodies and the number of lakes in Bangalore is given in Figure 2.9.

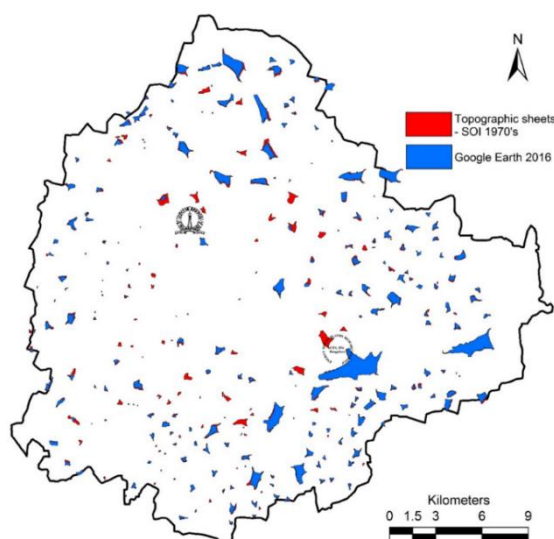


Figure 2.9: Status of Lake in Bangalore
(Red colour indicate lost lakes between 1970's to 2016)

During 1800, there were 1452 water bodies with the storage capacity of 35 TMC (in the current spatial extent of 741 sq.km.). The current capacity of lakes (193 lakes) is about 5 TMC and due to siltation, the current storage capacity of the lakes is just about 1.2 TMC, i.e., nearly 387 hectares of water bodies lost apart from reduction in the storage capacity by 60%. Bangalore being located on the ridges, forms three watersheds – Koramangala Challagatta valley, Vrishbhavathi valley and Hebbal Nagavara valley. Earlier rulers of the region, created interconnected lake systems taking advantage of undulating terrain. Number of lakes in Koramangala Challaghatta valley is about 81, followed by the Vrishabhavathi valley (56) and the Hebbal Nagavara valley (46). In order to enhance the water retaining capability in the catchment, it is essential to harvest rain water. Lakes are the optimal means of rainwater harvesting at community level. This entails

- (i) Reestablishing interconnectivity among lakes (needs to remove all encroachments without any consideration, as the water security of a region is vital than the vested interests, who have unauthorisedly occupied without respecting future generation's food and water security. This would also reduce the frequency of floods and consequent damage to life and property,

- (ii) removal of all encroachments of lakes and lake bed,
- (iii) rejuvenation and regular maintenance of water bodies - this involves desilting of lakes to (a) enhance the storage capacity to retain rainwater, (b) increase the recharge potential – will improve groundwater table, (c) ensure recharging without any contamination,
- (iv) allowing only treated sewage (removal of chemical and biological contaminants) through adoption of integrated wetlands ecosystem (Jakkur lake model),
- (v) creation of wetlands with native vegetation and regular harvesting of macrophytes; food and fodder, which supports local people's livelihood, and
- (vi) maintaining at least 33% green cover with native vegetation (grass, trees, shrubs) in the catchment and maintaining riparian vegetation in the buffer region. This would help infiltration of water and retain this water.

Sufficient water is available to meet everyone's requirement (Figure 2.10: Optimal water management through 5R's): (i) water harvesting is undertaken through surface water bodies (14.8 TMC); this requires rejuvenation of lakes and reestablishment of interconnectivity; harvesting of rainwater (at decentralized levels), treatment; (ii) treatment and reuse of sewage (16.04 TMC). However, the success of sustainable water path depends on the political will, bureaucracy shedding their colonial style of functioning and more importantly citizen's assertion for their right for equal quantity and quality of water.

- (i) Average annual rainfall in Bangalore is about 787 mm with 75% dependability and return period of 5 years. Catchment wise water yield analysis indicates about 49.5% (7.32 TMC) of water yield in the Vrishabhavathi valley (including Arkavathi and Suvarnamukhi), followed by 35.2% (5.2 TMC) in Koramangala Challaghatta valley and 15.3% (4.2 TMC) in Hebbal valley and the total annual water yield in Bengaluru is about **14.80 TMC**. Domestic demand of water (at 150 lpcd) is 20.05 TMC per year (1573 MLD). This means about 73% of Bangalore's water demand can be met by efficient harvesting of rain water. Quantification of sewage generated shows that about 16.04 TMC (1258 MLD) of sewage is generated in the city.
- (ii) Sewage treatment with complete removal of nutrients and chemical contaminants can be achieved by adopting decentralized treatment plants similar to the success model (secondary treatment plant integrated with constructed wetlands and algae pond) at

Jakkur lake. In addition to this, water available with efficient rainwater harvesting is about 14.8 TMC. This accounts to total of 30.85 TMC of water that is available annually would cater the demand of 20.05 TMC, provided the city administration opts for decentralized optimal water management through (i) rainwater harvesting by rejuvenating lakes - the best option to harvest rain water is through interconnected lake systems, (ii) treatment of sewage generated in households in each locality (opting the model functional since 2010 at Jakkur lake – STP (Sewage Treatment Plant) integrated with constructed wetlands and algal pond; (iii) conservation of water by avoiding the pilferages (due to faulty distribution system); (iv) ensuring water supply 24x7 and (v) ensuring all sections of the society get equal quantity and quality of water. Rejuvenating lakes in the region helps in retaining the rain water. Treating sewage and options to recycle and reuse would minimize the demand for water from outside the region.

Availability	Water yield (rain)	14.80 TMC
	Sewage (generation 20.05 TMC) if treated	16.04 TMC
	Total	30.84 TMC
Demand	Domestic purposes (@ 150 lpcd)	20.05 TMC
	If @ 135 lpcd	18.34 TMC
Status	Surplus	10.79 -12.50 TMC

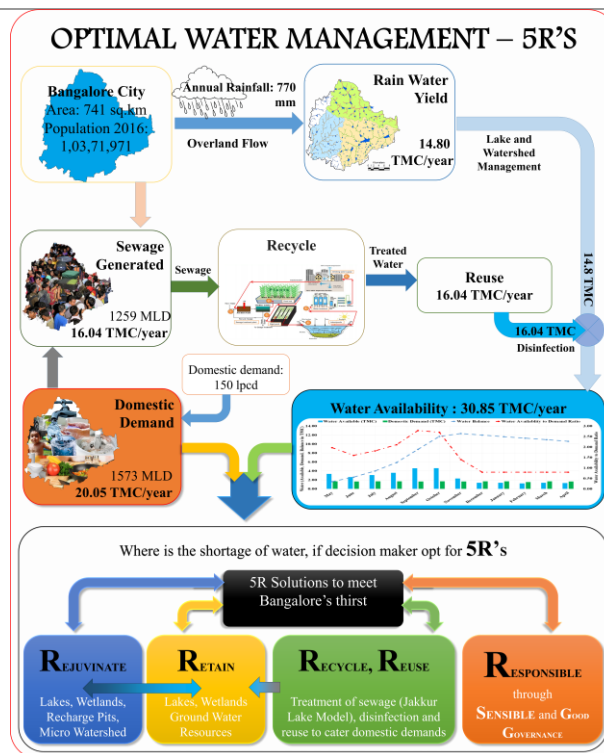
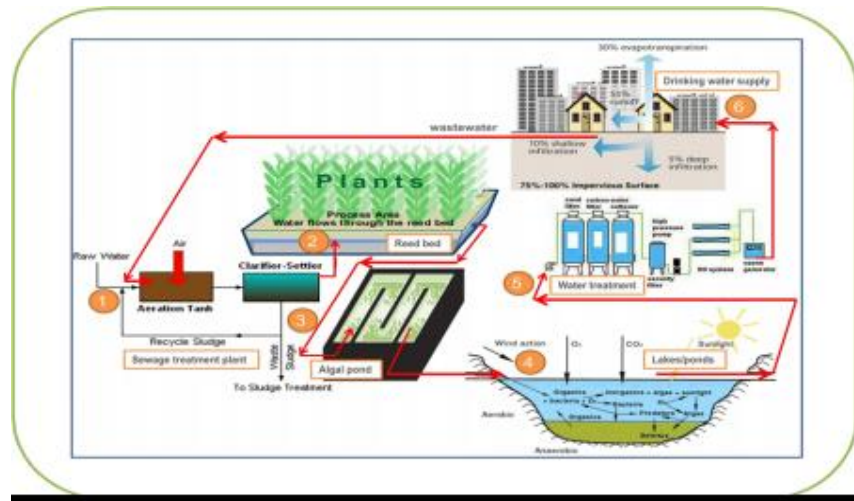


Figure 2.10: Sustenance of Water through Optimal water management with 5R's

3.0 REMEDIAL MEASURES –

INTEGRATED WETLAND SYSTEM-JAKKUR MODEL

Integrated wetlands system consists of sewage treatment plant, constructed wetlands (with location specific macrophytes) and algal pond integrated with a lake (figure 3.1). Constructed wetland aid in water purification (nutrient, heavy metal and xenobiotics removal) and flood control through physical, chemical, and biological processes. When sewage is released into an environment containing macrophytes and algae a series of actions takes place. Through contact with biofilms, plant roots and rhizomes processes like nitrification, ammonification and plant uptake will decrease the nutrient level (nitrate and phosphates) in wastewater. Algae based lagoons treat wastewater by natural oxidative processes. Various zones in lagoons function equivalent to cascaded anaerobic lagoon, facultative aerated lagoons followed by maturation ponds. Microbes aid in the removal of nutrients and are influenced by wind, sunlight and other factors (Ramachandra et al., 2014). This model is working satisfactorily at Jakkur. The sewage treatment plant removes contaminants (evident from lower COD and BOD) and mineralises organic nutrients ($\text{NO}_3\text{-N}$, PO_4^{3-}P to inorganic constituents. Integration of the conventional treatment system with wetlands [consisting of reed bed (with typha etc.) and algal pond] would help in the complete removal of nutrients in the cost effective way. Four to five days of residence time in the lake helps in the removal of pathogen apart from nutrients. However, this requires regular maintenance through harvesting macrophytes and algae (from algal ponds). Harvested algae would have energy value, which could be used for biofuel production. The combined activity of algae and macrophytes helps in the removal of ~45% COD, ~66 % BOD, ~33 % $\text{NO}_3\text{-N}$ and ~40 % PO_4^{3-}P . Jakkur lake acts as the final level of treatment that removes ~32 % COD, ~23% BOD, ~ 0.3 % $\text{NO}_3\text{-N}$ and ~34 % PO_4^{3-}P . The lake water with a nominal effort of sunlight exposure and filtration would provide potable water. Replication of this model in rapidly urbanizing landscapes (such as Bangalore, Delhi, etc.) would help in meeting the water demand and also mitigating water scarcity through recharging of groundwater sources with remediation.

**Inflow Characteristics**

COD = ~88 mg/l
 BOD = ~47 mg/l
 NO_3^- = 0.4 mg/l
 PO_4 = 0.35 mg/l

Settling basin/algal pond

COD = ~48 mg/l
 BOD = ~16 mg/l
 NO_3^- = 0.27 mg/l
 PO_4 = 0.21 mg/l

Lake Outfall

COD = ~20 mg/l
 BOD = ~5.04 mg/l
 NO_3^- = 0.28 mg/l
 PO_4 = 0.09 mg/l

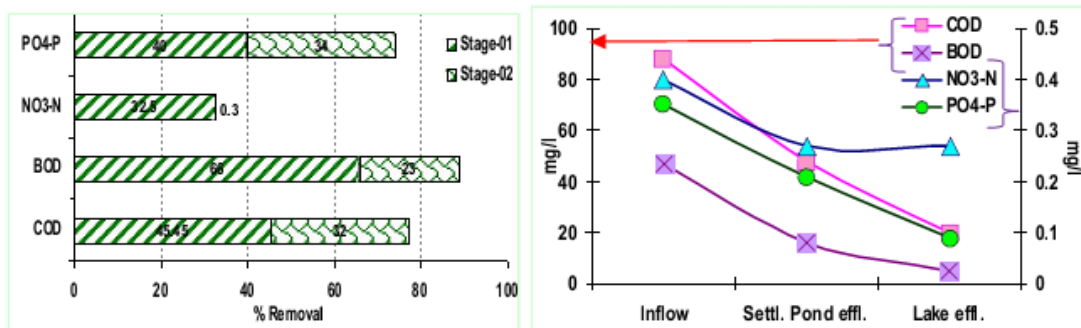
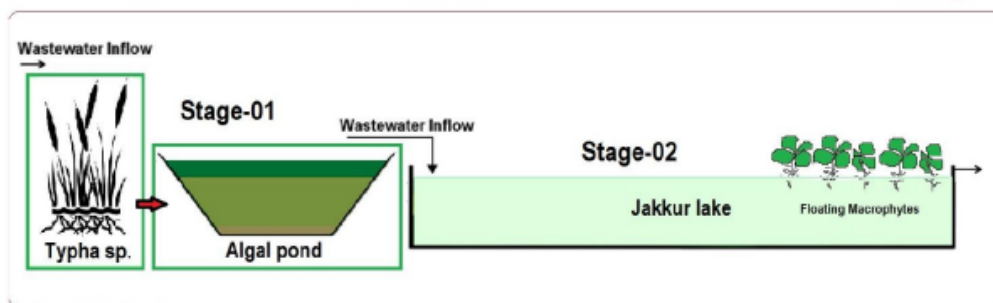


Figure 3.1: Jakkur model

PROPOSED CONSTRUCTED WETLAND MODEL AT BELLANDUR

Bellandur lake, located in south eastern part of Bangalore city along the Koramangala Challaghatta valley, that joins Dakshina Pinakini river flowing to the Bay of Bengal. Bellandur lake has a catchment area about 279 sq.km, while the lake being the largest in Bangalore has an area about 366.9 hectares. The lake has three major inlets from i) Agaram ii) ST bed iii) HAL, sides respectively receiving at least 400 MLD water. Inlet from Agarma side contributes nearly 128 MLD of sewage and inlet from ST bed side of the lake contributes to 102 MLD of sewage (Figure. 3.2), which can be biologically treated at the inlets of the lake. RMP of 2015 indicates a treatment facility at the Agaram Bellandur side of the lake, whereas the same area is now being used for SEZ (Figure 3.3). The under construction SEZ has encroached the lake bed, violated the norms of minimum buffer zones with respect to the drainage networks, altered the drainage lands (encroached kharab lands). As per NGT, the encroached lake bed has to be recovered by the government. The SEZ is being built in the valley zone (contrary to RMP 2015) is to be shifted elsewhere and the recovered wetlands area will aid in creating integrated water treatment systems (fig 3.3.1).

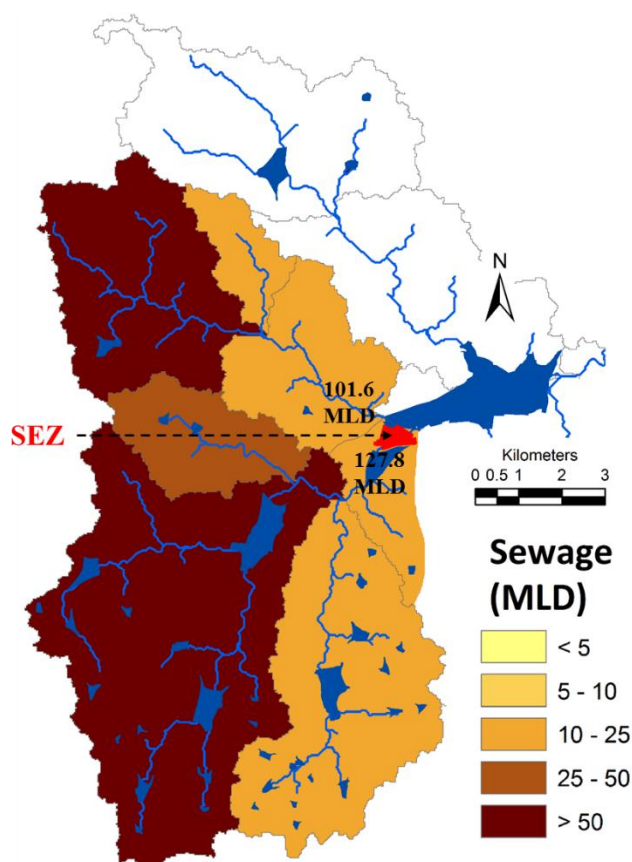


Figure 3.2: Sewage generated at Bellandur Inlets

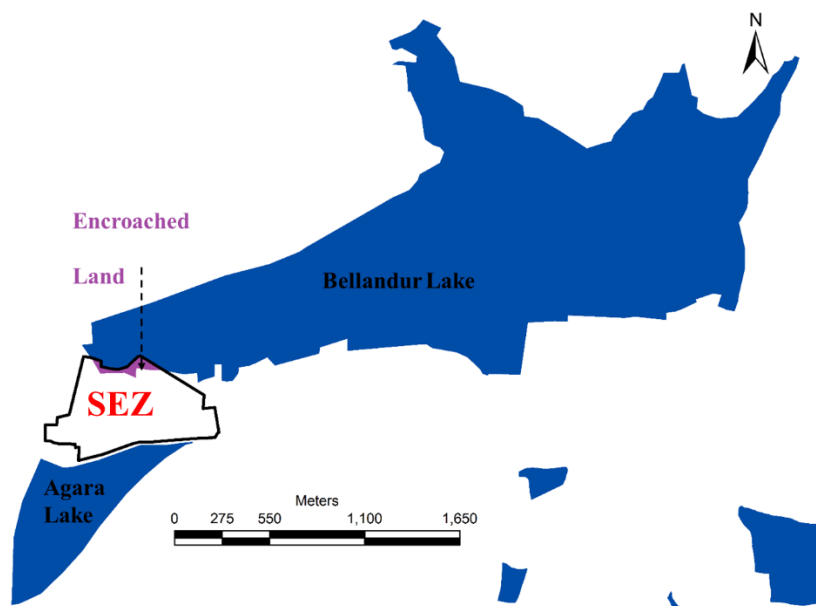


Figure 3.3: SEZ, Bellandur and Agara lakes.

In order to treat the water from Agaram and ST bed side inlet of the lakes, biological treatment methods can be adopted and is as described in Figure 3.4.



Figure 3.3.1: Proposed Sewage Treatment with wetlands

Along the Agaram side of the lake, about 35 MLD of 128 MLD is planned to be treated upstream of Agaram lake by the government agency, and remaining 93 MLD can be treated by planning SBR and constructed wetland in the current said SEZ area (Site A) and is as described in Table 1 and Figure 3.4. SBR treatment on an average requires nearly ~0.045 hectares of land for treating 1 MLD of water (Ramachandra, et.al., 2017 – ETR 116), based on this, to treat about 95 MLD,

~4.3 hectares (~10.5 – 12 acres) of land is required for having SBR system. The sewage at Bellandur has a BOD ranging between 120 – 410 mg/l, COD 190 -960 mg/l, Total Suspended Solids 90 – 390 mg/l, though SBR treatment, BOD can be reduced to less than 10 mg/l, COD < 50mg/l, TSS < 10. (Ramachandra et al, 2017 – ETR 116). The constructed wetlands in the downstream of the SBR has the ability to take up the nutrients in the systems, the advantage of constructed wetlands area they are efficient, cost effective and requires a very low maintenance. Frequent harvesting of the macrophytes is necessary to maintain the constructed wetlands. To treat 95 MLD of water from the SBR outlet, an area of nearly 73.8 acres (30 hectares) is necessary. The area of the wetlands is estimated using the equation

$$A = Q_d \frac{\ln(C_i) - \ln(C_e)}{K_{BOD}}$$

Where A is the area of the constructed wetland in square meters, Q_d is the average inflow as cubic meters per day. C_i and C_e are the influent and effluent BOD as milligram per litre, K_{BOD} is a factor (0.1) Table 3.1 indicates various parameters and area requirement under the wetlands.

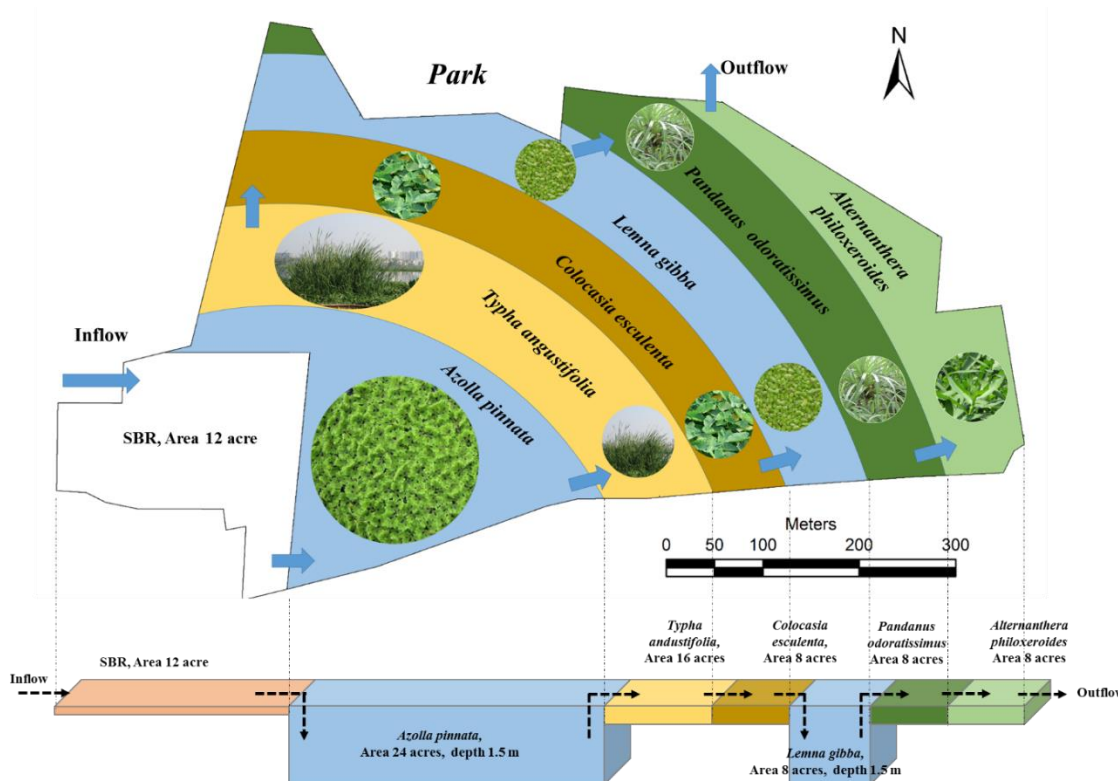


Figure 3.4: Conceptual treatment model at Bellandur inlet: 95 MLD (A)

Various macrophytes that can be grown in the wetlands are depicted in sequence in Figure 3.4, along with the depth requirements.

Table 3.1: Estimation of Wetland Area requirements

Slno	Description	Units of measurement	Quantity
1	Q - Discharge	MLD	95
2		cum/day	95000
3	SBR area requirement	Ha/MLD	0.045
4		Ha	4.3
5		Acre	10.6
6	Sewage treatment plant area	Acre	12
WETLAND			
7	Ci - input BOD	mg/ltr	10
8	Co - output BOD	mg/ltr	7
9	K _{BOD} – BOD factor		0.1
10	Area	Ha	30
11		Acre	73.8
	TOTAL AREA		
12	Required area	Acre	85.8
13	Available SEZ area	Acre	85.8

Total area about 85.8 acres is necessary for treating 95 MLD of 128 MLD of sewage water generated at Agaram side of the catchment. The treated water can be directly let to the lake downstream of site C.

A bund like structure could be constructed to divert 95 MLD of water in to the SBR-wetland treatment system. The excess water at inlet of 95 MLD treatment plant can be partially treated at the channels joining agaram and Y junction of bellandur (Figure 3.5).

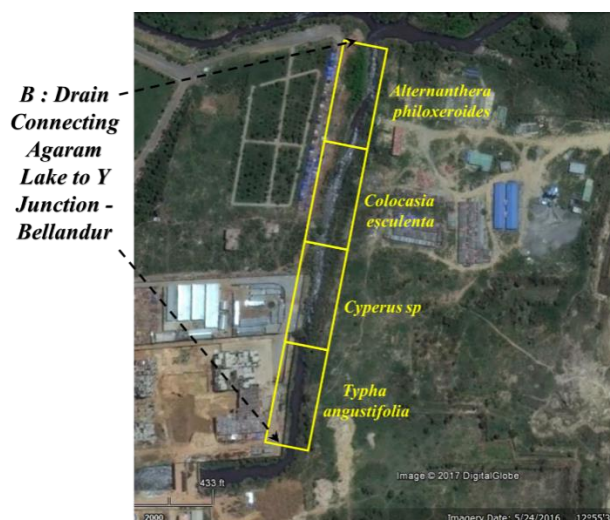


Figure 3.5: Treatment model along channel connecting Agaram Bellandur Lake (B)

About 102 MLD of untreated sewage water comes into the Bellandur lake from ST lake bed side catchment. The area of the wetland is nearly 105 acres in the Bellandur lake upstream, and the depth varies between 0.5 m to about 1.5 m with an approximate average depth of 0.8 m. with the existing area and depth, volume of water that can be stored in the wet land is nearly 340 Million Liters. With respect to the discharge of Sewage at 102 MLD, residence time of 3.3days is available at the wetland portion of the lake. The existing macrophytes pockets in the wetlands is as depicted in Figure 6 (white coloured polygons). These macrophyte clusters needs to be retained in the system in order to treat the incoming sewage. The flow of sewage can be regulated (Figure 3.6 – yellow arrows) through planned channels without disturbing the existing clusters of macrophyte cover, and providing more residence time, and contact with the macrophytes. A broad crested weir at the outlet of the planned wetland would also help in increasing the residence time and improving aeration at the fall



Figure 3.6: Treatment model at Bellandur Lake (C)

4.0 STOP UNPLANNED URBANISATION IN BANGALORE: NON-RESILIENT AND UNLIVABLE WITH UNABATED SENSELESS CONCRETISATION

1028% INCREASE IN PAVED SURFACE DURING 1973 TO 2017 (FIGURE 4.1)

Solution: Enough is Enough, **DECONGEST BANGALORE.**

- SHIFT MAJOR INSTALLATIONS TO OTHER CITIES IN KARNATAKA,
- STOP FURTHER INDUSTRIAISATION AND COMMERCIAL ESTABLISHMENTS IN BANGALORE.
- PROTECT OPEN SPACES – LAKES, PARKS, ETC.
- STOP FURTHER GROWTH OF DYING CITY – WITH WATER AND OXYGEN SCARCITY
- BWSSB SHOULD STOP ISSUING NOC (No Objection certificate) TO MAJOR BUILDING PROJECTS AS THERE IS NOT SUFFICIENT WATER (either Cauvery water or Groundwater) IN THE CITY.

Bangalore is experiencing unprecedented rapid urbanisation and sprawl in recent times due to unrealistic concentrated developmental activities. This **has led to the large scale land cover changes with serious environmental degradation**, posing serious challenges to the decision makers in the city planning and management process involving a plethora of serious challenges such as climate change, enhanced emissions of greenhouse gases (GHG), lack of appropriate infrastructure, traffic congestion, and lack of basic amenities (electricity, water, and sanitation) in many localities, etc.

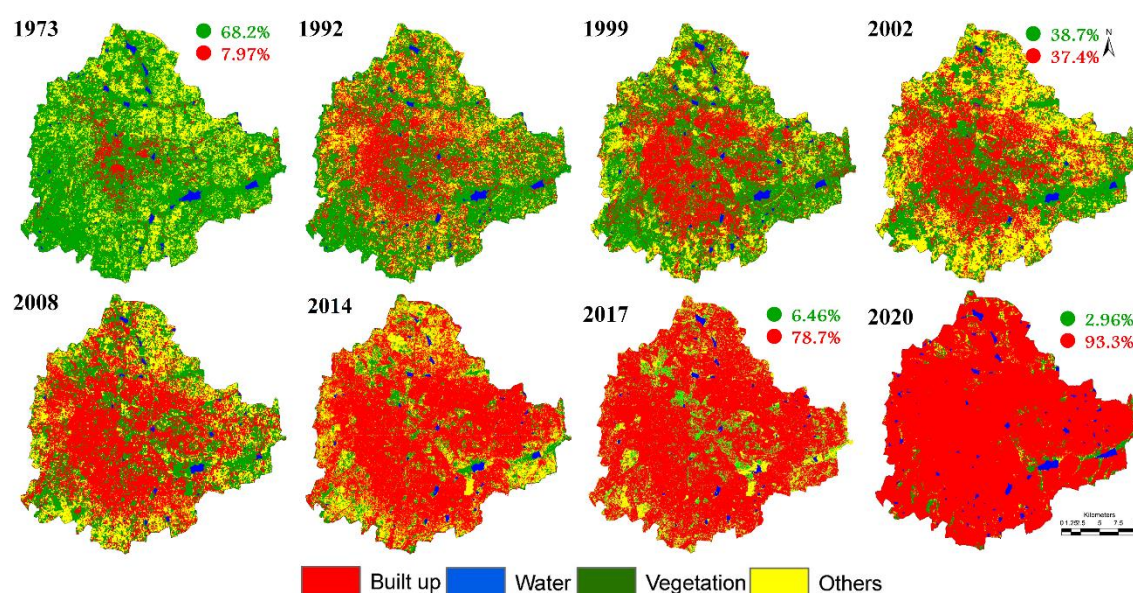


Figure 4.1: Land use dynamics in Bengaluru

Table 4.1: Land use dynamics of Bangalore


Area	Land use \ Class	1973	1992	1999	2002	2008	2014	2017	2020
Hectare	Built up	5683	19452	25202	26890	35301	46626	56046	66455
	Vegetation	48650	32937	32616	27590	20090	5986	4603	2108
	Water	2424	1867	1608	1317	613	527	734	1491
	Others	14503	17004	11834	15462	15256	18121	9877	1206
Percentage	Built up	7.97	27.30	35.37	37.74	49.54	65.43	78.65	93.26
	Vegetation	68.27	46.22	45.77	38.72	28.19	8.40	6.46	2.96
	Water	3.40	2.62	2.26	1.85	0.86	0.74	1.03	2.09
	Others	20.35	23.86	16.61	21.70	21.41	25.43	13.86	1.69

Urbanisation and loss of natural resources (wetlands and green spaces): Urbanisation during 1973 to 2017 (1028% concretization or increase of paved surface) has telling influence on the natural resources such as decline in green spaces (88% decline in vegetation), wetlands (79% decline), higher air pollutants and sharp decline in groundwater table. Figure 4.1 depicts the unrealistic urban growth during the last two decades. Quantification of number of trees in the region using remote sensing data with field census reveals that there are only 1.5 million trees to support Bangalore's population of 9.5 million, indicating one tree for every seven persons in the city. This is insufficient even to sequester respiratory carbon (ranges from 540-900 g per person per day). Geo-visualisation of likely land uses in 2020 through multi-criteria decision making techniques (Fuzzy-AHP: Analytical Hierarchal Process) reveals calamitous picture of 93% (Table 4.1) of Bangalore landscape filled with paved surfaces (urban cover) and drastic reduction in open spaces and green cover. This would make the region GHG rich, water scarce, non-resilient and unlivable, depriving the city dwellers of clean air, water and environment.

CURRENT SCIENCE

Volume 110 Number 12

25 June 2016

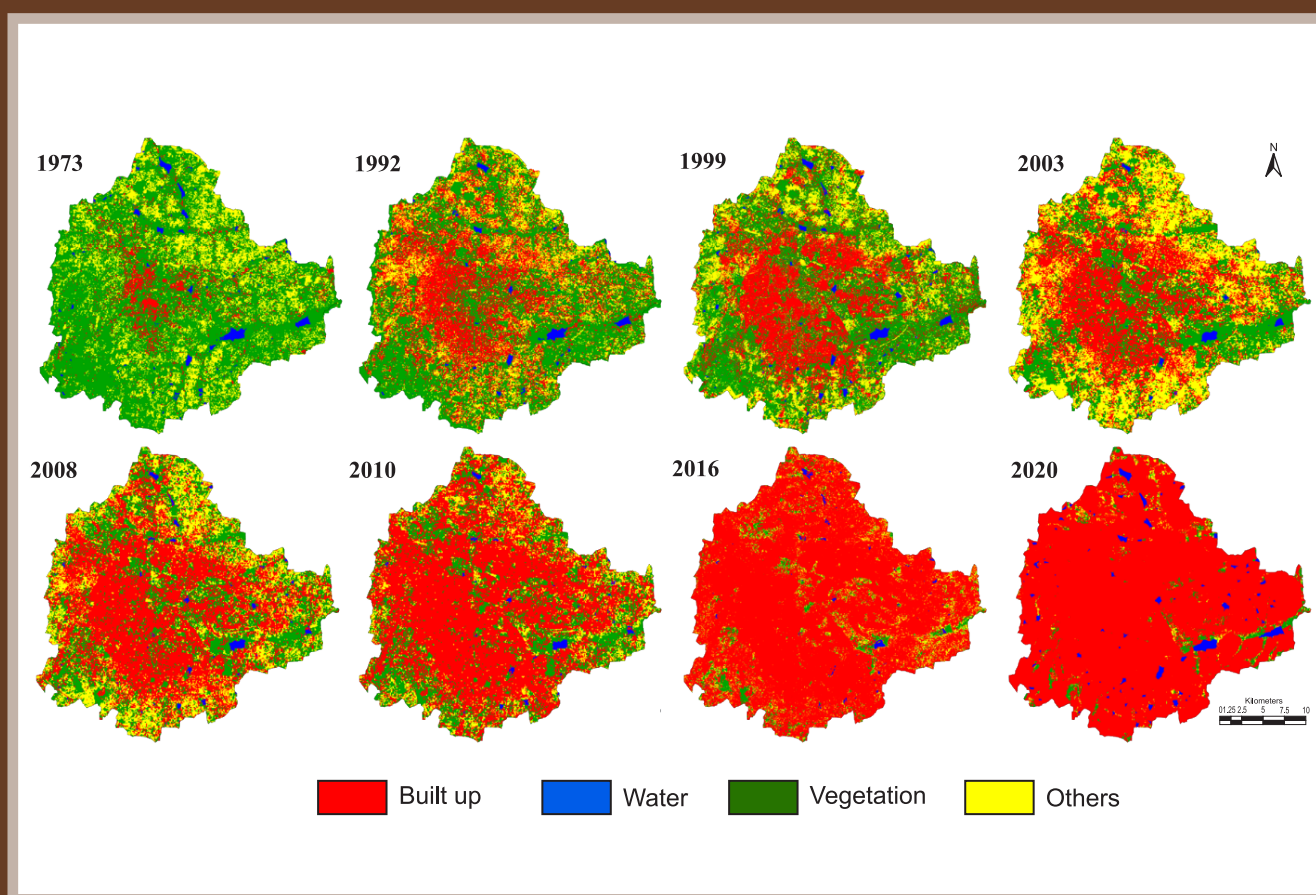

Research productivity of Indian physiotherapists

Nutritional status and infant mortality rate in Mizoram

Synthesis of gold nanoparticles

Bengaluru's reality: towards unlivable status with unplanned urban trajectory

The origin of cities can be traced back to the river valley civilizations of Mesopotamia, Egypt, Indus Valley and China. Initially these settlements were largely dependent upon agriculture; however, with the growth in population the city size increased and economic activity transformed to trading (Ramachandra, T. V. *et al.*, *TEMA J. Land Use, Mobility Environ.*, 2014, 7(1), 83–100). The process of urbanization gained impetus with the Industrial Revolution 200 years ago and accelerated in the 1990s with globalization and consequent relaxation in market economy (Ramachandra, T. V. *et al.*, *Int. J. Appl. Earth Obs. Geoinf.*, 2012, 18, 329–343).

Urbanization refers to the growth of towns and cities due to large proportion of the population living in urban areas and its suburbs at the expense of rural areas (*op. cit.*). In most of the countries, the total population living in urban regions has extensively accelerated since the Second World War. Rapid urbanization is evident from the increase in global urban population from 13% (220 million) in 1900 to 49% (3.2 billion) in 2005, and is expected to increase to 60% (4.9 billion) by 2030 (*op. cit.*). Current global population is 7.4 billion and urban population has been increasing three times faster than the rural population, mainly due to migration in most parts of the world. People migrate to urban areas with the hope of better living, considering relatively better infrastructural facilities (education, recreation, health centres, banking, transport and communication), and higher per capita income. Unplanned urbanization leads to the large-scale land-use changes affecting the sustenance of local natural resources. Rapid unplanned urbanization in most cities in India has led to serious problems in urban areas due to higher pollution (Ramachandra, T. V. *et al.*, *Renew. Sustain. Energy Rev.*, 2015, 44, 473–495) (air, water, land, noise), inequitable distribution of natural resources, traffic congestion, spread of slums, unemployment, increased reliance on fossil fuels, and uncontrolled outgrowth or sprawl in the periphery. Understanding spatial patterns of urban growth and visualization is imperative for sustainable management of natural resources and to mitigate changes in climate. This would help the city planners to mitigate the problems associated with the increased urban area and population, and ultimately build sustainable cities.

Bengaluru is experiencing unprecedented rapid urbanization and sprawl in recent times due to unrealistic concentrated developmental activities with impetus on industrialization for the economic development of the region. This has led to large-scale land-cover changes with serious environmental degradation, posing serious challenges to the decision makers in the city planning and management process, such as climate change, enhanced emissions of greenhouse gases (GHGs), lack of appropriate infrastructure, traffic congestion, and lack of basic amenities (electricity, water and sanitation) in many localities. Apart from these, major implications of urbanization are the following.

Urbanization and loss of natural resources (wetlands and green spaces): Urbanization during 1973–2016 (1005% concretization or increase of paved surface) has had a telling influence on the natural resources, such as decline in green spaces (88% decline in vegetation), wetlands (79% decline), higher air pollutants and sharp decline in groundwater table. Figure (see Cover Page of this issue) depicts the unrealistic urban growth during the last four decades. Quantification of the number of trees in the region using remote sensing data with field census reveals that there are only 1.5 million trees to support Bengaluru's population of 9.5 million, indicating one tree for every seven persons in the city (Ramachandra, T. V. *et al.*, *ENVIS Technical Report 75*, IISc, 2014, p. 75). This is insufficient even to sequester respiratory carbon (ranges from 540 to 900 g per person per day). Geo-visualization of likely land uses in 2020 through multi-criteria decision-making techniques (Fuzzy-AHP) reveals a calamitous picture of 93% of Bengaluru's landscape being filled with paved surfaces (urban cover), and drastic reduction in open spaces and green cover. This would make the region GHG-rich, water-scarce, non-resilient and unlivable, depriving the city-dwellers of clean air, water and environment.

Field studies during 2015–16 of 105 lakes revealed that 98% of the lakes have been encroached for illegal buildings (high-rise apartments, commercial buildings, slums, etc.) and 90% of the lakes are sewage-fed. Also, lake catchments are being used as dumping yards for either municipal solid waste or building debris. Indiscriminate disposal of solid and liquid waste (rich in organic nutri-

ent) has enriched nitrate levels in the surrounding groundwater resources, threatening the health of residents (such as kidney failure, cancer, etc.). Washing, household activities, vegetable cultivation and even fishing was observed in few contaminated lakes. Unauthorized construction in valley zones, lakebeds and storm water drains highlight the apathy of decision-makers, while mirroring weak and fragmented governance. This is correlated with the increase in unauthorized constructions violating town planning norms (city development plan), which has severely affected open spaces and water bodies in particular.

Large-scale fish mortality in recent months further highlights the level of contamination and irresponsible management of water bodies. Sustained inflow of untreated sewage has increased the organic content beyond the threshold of remediation capability of the respective water bodies. Increasing temperatures (34–35°C) with the onset of summer, enhanced the biological activities (evident from higher ammonia and biochemical oxygen demand) that lowered dissolved oxygen levels leading to fish death due to asphyxiation.

Floods: Conversion of wetlands to residential and commercial layouts has compounded the problem by removing the interconnectivities in an undulating terrain. Encroachment of natural drains, alteration of topography involving the construction of high-rise buildings, removal of vegetation cover, and reclamation of wetlands are the prime reasons for frequent flooding even during normal rainfall post 2000.

Decline in groundwater table: The water table has declined to 300 m from 28 m, and 400–500 m in intensely urbanized area such as Whitefield, over a period of 20 years.

Heat island: Surface and atmospheric temperatures have increased due to the loss of natural cover (trees and water bodies) with an increase in artificial materials having high heat conductivities. Temperature has increased by ~2–2.5°C during the past three decades, highlights the implications of explosive urban growth on local climate, necessitating appropriate mitigation strategies.

Increased carbon footprint: Drastic increase in electricity consumption has been observed in certain corporation wards due to adoption of inappropriate building architecture in tropical climate. Per capita electricity consumption in the zones dominated by high-rise building with glass facades ranges from 14,000 to 17,000 units (kWh) per year compared to zones with eco-friendly buildings (1300–1500 units/person/yr)³.

Emissions from the transport sector is about 43.83% (in Greater Bengaluru) on account of large-scale usage of private vehicles, and mobility related to job accounts for 60% of total emissions due to lack of appropriate public transport system and haphazard growth with unplanned urbanization. Majority commute longer distances with private vehicles, thus contributing to emissions. Apart from these, mismanagement of solid and liquid waste has aggravated the situation with emission of GHGs (methane, CO₂, etc.).

Unplanned cities thus not only contribute to global climate change by emitting the majority of anthropogenic GHGs but are also particularly vulnerable to the effects of climate change and extreme weather. This emphasizes the need to improve urban sustainability through innovations while addressing technical, ecological, economic, behavioural and political challenges to create cities that are low-carbon, resilient and livable.

The ‘Smart Cities Mission’ launched by the Government of India recently (June 2015) envisages developing physical, institutional and social infrastructure in select cities with central assistance targeted at improving the quality of life as well as economic visibility of the respective urban centres (<http://smartcities.gov.in/> (last accessed on 20 May 2016)). Four strategic components are: (i) green field development through smart townships by adopting holistic land management; (ii) pan-city development through adoption of smart applications like transport, reuse and recycle of wastewater, smart metering, recovering energy from solid waste, etc. (iii) retrofitting to make existing areas more efficient and livable by reducing GHG footprint, improving power and treated water supply, improving communication and infrastructure connectivity and security, and (iv) re-development of existing built-up area, creation of new layouts through mixed land use, adoption of appropriate floor area index considering the level of existing, and scope for improvement of infrastructure and basic amenities, which helps in keeping the city’s growth within the region’s carrying capacity, and also urban infrastructure becomes inclusive. This entails efficient decision-making through (i) integrated land-use planning according to the city’s requirements; (ii) enhancement of the functional capacity through user-friendly and economic public transport support; (iii) development of mass rapid-transport systems, and (iv) effective use of ICTs as enabling technologies. These measures have to be implemented quickly as most cities are in a civic and financial disarray because of senseless unplanned rapid urbanization.

Environmentally sound urban centres with essential basic amenities and advanced infrastructure (such as sensors, electronic devices and networks) would stimulate sustainable economic growth and improvements in citizen services. The effective and coordinated governance supports social and urban growth through improved economy and active participation of citizens. Indian cities, while exhibiting technological innovations and connectedness, should also focus on increased living comfort through adequate infrastructure, green spaces and essential basic amenities to every citizen.

T. V. Ramachandra*

Bharath H. Aithal

Energy and Wetlands Research Group,

Centre for Ecological Sciences,

Indian Institute of Science,

Bengaluru 560 012, India

*e-mail: cestvr@ces.iisc.ernet.in

5.0 VIOLATIONS IN VALLEY ZONES AND BUFFER ZONES OF WATER BODIES

Solution: evict all encroachments to restore and maintain hydrological integrity of valley zones and flood plains

Valley zones: Bangalore has the distinction of having inter connected lake systems. Valley zones connecting two lakes are to be protected to ensure the continuation of hydrological functions of the drains and flood plains. These have been designated as sensitive regions as per the revised master plan 2015 (RMP 2015 of BDA). However, valley zones in Bangalore are being abused despite norms to protect these fragile ecosystems. For example, Pristine Bellandur-Varthur wetland ecosystem has been experiencing threat due to the large scale catchment alterations with changes in the land use land cover. The region forms a part of primary valley, which is sensitive regions as per the revised master plan 2015 (RMP 2015 of BDA). The landscape forms an integral part of the protected area (as it is in valley zone) as per the CDP 2015. This wetlands is now being converted with mixed land use i.e., Built-up with both residential and office complexes. Alterations in the wetland began in 2004 and aggravated post 2008. The alterations of these wetlands initiated by filling the low lying areas with excavated earth debris, followed by other construction activities. The land fillings have breached both rajakaluve and lakes. Rajakaluve have reduced in width from as high as 35m to less than 8 m, apart from the loss of natural stream network connecting the lakes and rajakaluveys. Major violations in Bellandur-Vathur wetlands are:

- LAND USE CHANGES WITH THE CONSTRUCTION ACTIVITIES IN THE PRIMARY VALLEY – SENSITIVE REGIONS (as per RMP, 2015 of BDA: The region is located in the primary valley of the Koramangala Challaghatta valley. Primary valleys in Bangalore **are sensitive regions** as per sensitive zone notification - Circular/35/BBMP/2008, dated: 26/11/2008) and buffer zone for primary valley is 100 m.
- The region is a wetland as per **KARNATAKA LAKE CONSERVATION AND DEVELOPMENT AUTHORITY ACT, 2014 - KARNATAKA ACT NO. 10 OF 2015; KAR. ACT 12, pg 462; National Wetland Atlas, SAC Ahmedabad, 2009; Wetland rules, MoEF, Govt of India, 2010, 2016; RAMSAR Definition of wetlands.**
- Removal of wetlands affects Intergeneration Equity.
- Depriving local residents of water: Wetlands helps in recharge of groundwater in the region.
- Encroachment of Rajakalve and streams (connecting Bellandur and Varthur lakes).
- Deprives local residents of clean, air and water (as per Article 21 of the Constitution of India).
- Dumping of building debris and excavated earth in Wetlands and also in water-spread area of Bellandur and Varthur lake.
- Encroachment of Bellandur and Varthur lake.

Figure 5.1 depicts the landscape dynamics in the valley zone between Bellandur and Varthur Lakes. Large scale landscape changes found to occur since 2004, and the process of urbanization is occurring from west to east (Bellandur to Varthur). The wetlands and agriculture lands encompassing 98.5% of the valley zone in 2002 have drastically decreased to 25.68% by the year 2016 which is due to land use conversion for construction (residential/commercial/infrastructure) which has increased from 1.44% in 2002 to 74.32% in 2016. This rampant growth in the valley zone have removed lakes and raja kaluveys that altered the function of natural system of cleansing water, recharging ground water. Table 5.1 highlights extent of landscape alterations and unauthorized occupation of Valley zone.

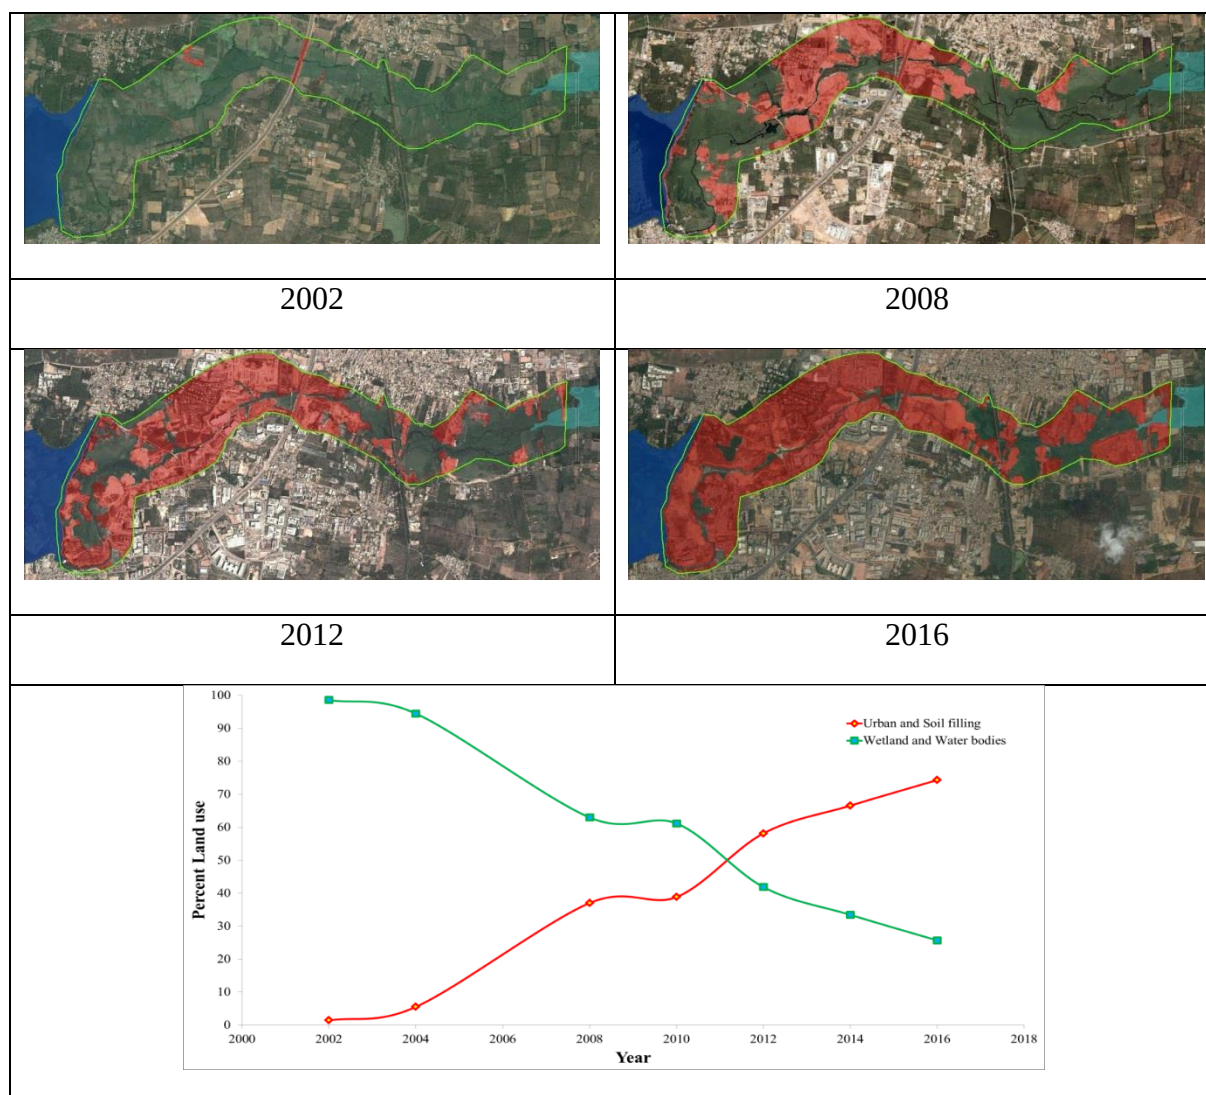


Figure 5.1: Land use dynamics in Bellandur Varthur Valley Zone

Table 5.1: Land use changes in the valley zone (Virtual Globe: Google earth)

Area in Hectares							
Land use / Year	2002	2004	2008	2010	2012	2014	2016
Urban and Soil filling	5.2	20.2	135.3	141.9	212.4	243.2	271.5
Wetland, Agriculture and Water bodies	360.0	345.0	230.0	223.4	152.9	122.2	93.8
Area in Percent							
Urban and Soil filling	1.44	5.53	37.04	38.84	58.15	66.56	74.32
Wetland, Agriculture and Water bodies	98.56	94.47	62.96	61.16	41.85	33.44	25.68


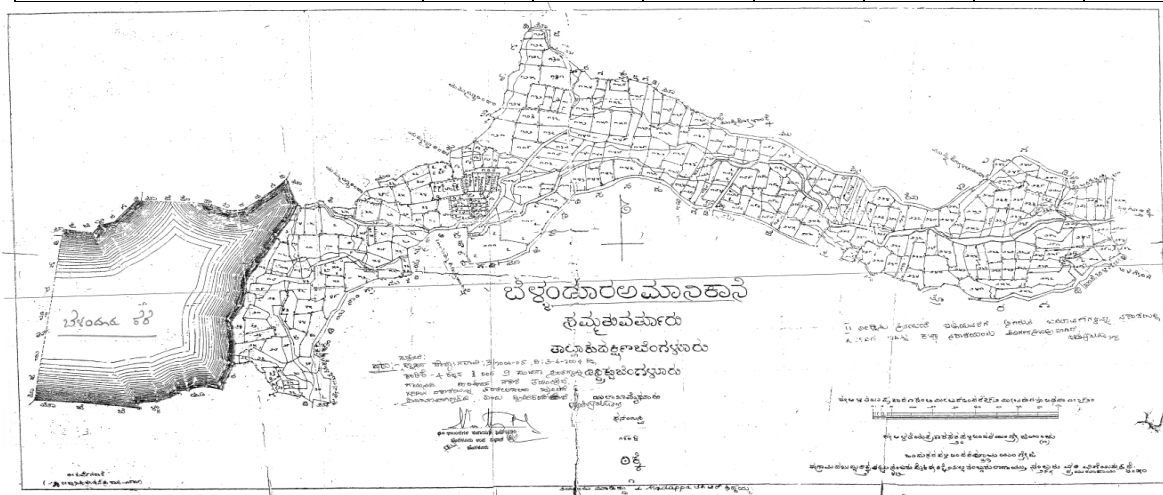


Figure 5.2: Revenue Map of Bellandur Ammanikere

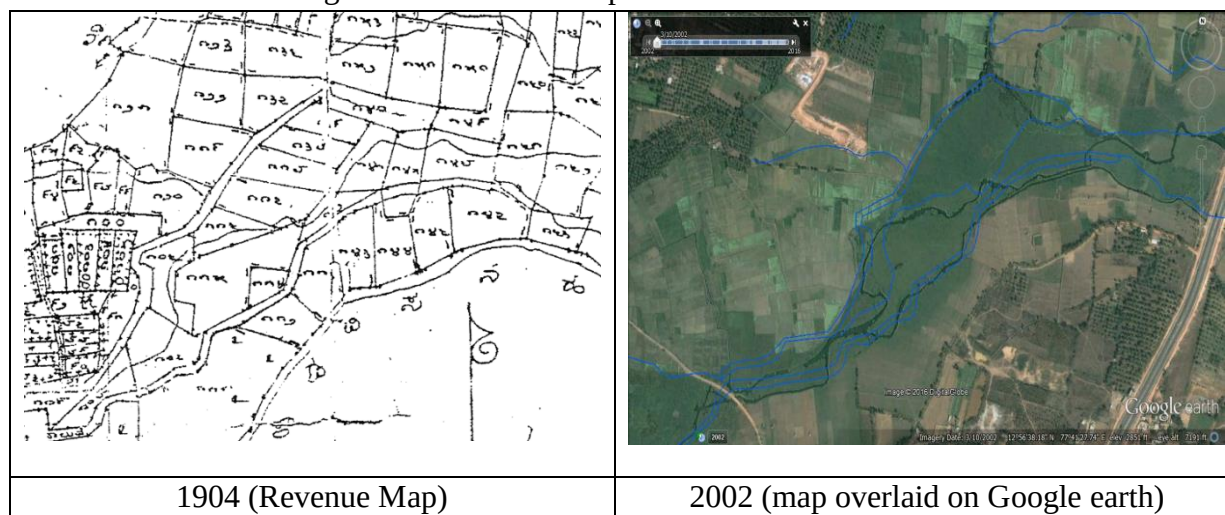

1904 (Revenue Map)

2002 (map overlaid on Google earth)



Figure 5.3: Alteration of natural drains and rajakaluveys

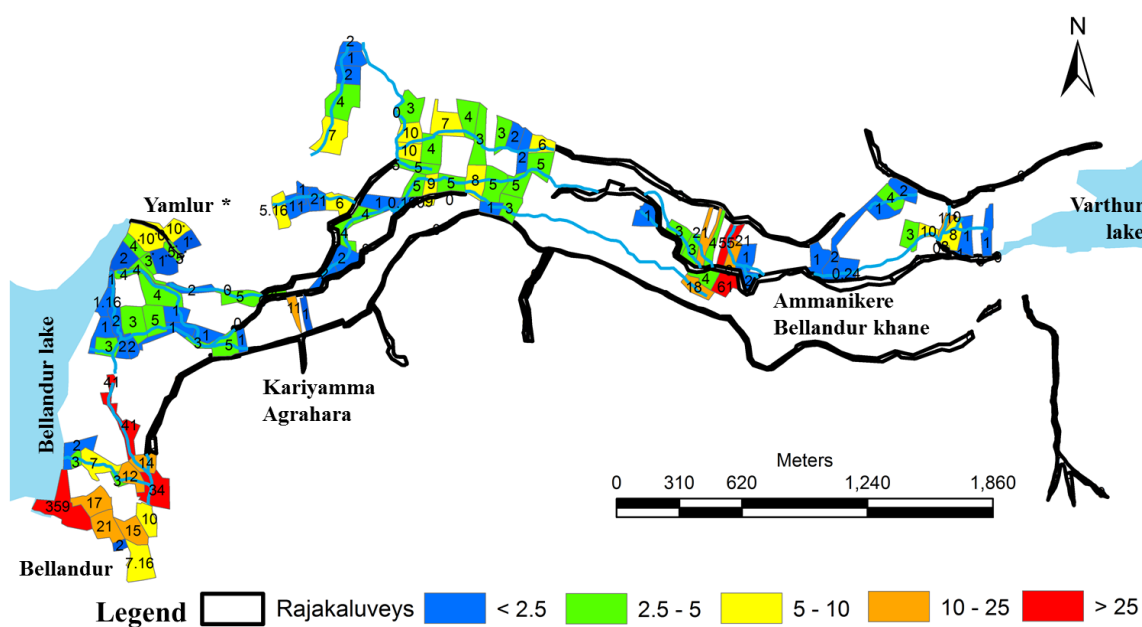


Figure 5.4: Kharab lands in the Valley zone between Bellandur and Varthur lakes

Table 5.2: Kharab lands in the valley zone

Ammanikere Bellandur Khane					
Survey Number	Area (Gunta)	Survey Number	Area (Gunta)	Survey Number	Area (Gunta)
2	1	98	2	168	3
3	1.16	99	1	169	2
6	4	106	4	170	2
7	4	107	2	171	6

8	1	108	2	172	5
9	1	116	4	201	1
10	5	117	1	209	3
11	3	120	6	212	3
12	2	124	7	213	21
13	2	125	4	215	4
14	2	126	2	217	4
15	3	127	1	218	18
16	1	128	2	221	61
25	2	140	5	222	21
26	3	141	5	223	55
27	7	142	0.16	227	1
30	12	145	9	228	2
31	3	148	5	241	1
38	34	151	4	244	1
39	14	152	10	245	2
42	41	153	10	248	2
53	3	154	3	249	4
54	1	157	7	250	1
55	5	159	4	253	0.24
56	1	160	3	256	14.08
63	5	161	8	272	10
64	2	162	5	273	3
93	5.16	163	1	280	11
94	2	164	3	282	8
96	1	165	5	283	1
97	1	166	2	285	1
Total Area (Guntas)			570.8		
Total Area (Acres)			14.27		

Bellandur		Yamlur *		Kariyamma Agrahara	
Survey Number	Area (Gunta)	Survey Number	Area (Gunta)	Survey Number	Area (Gunta)
4	359	54	20	17	4
8	17	55	1	19	11
10	10	56	10	22	1
11	15	57	1	Total (Gunta)	16
13	21	58	3	Total(Acre)	0.4
14	2	59	4		

18	7.16	60	2
Total (Gunta)	431.16	Total (Gunta)	41
Total(Acre)	10.78	Total(Acre)	1.025

* Verification required

Total Area (Guntas)	1058.96
Total Area (Acres)	26.47

Figure 5.2 depicts the revenue map of Bellandur Varthur valley zone (Bellandur Ammanikere). Rampant landscape changes in the valley zone have reduced the width (Figure 5.3) or encroached the natural drainages and rajakaluveys. Rajakaluveys of 25m to 35 m width have reduced in width to less than 5m to 8 m (example is depicted in Figure 5.9). Figure 5.4 and Table 5.2 details kharab lands in the valley zone between Bellandur and Varthur lake. 1058.96 Guntas (26.47 Acres) of land in the valley zone falls under the category of kharab lands and is distributed in villages of Ammanikere Bellandur Khane, (570.8 Guntas), Bellandur (431.2 Guntas), Kariyamma Agrahara (16 Guntas), Yamlur* (41 Guntas).

Bellandur-Agaram Valley zone: Figure 5.5 depicts the landscape dynamics during 2000 to 2015 (mapped on temporal Google Earth data – <http://earth.google.com>). The remote sensing data of 2009 – 2015 substantiates the unabated construction activities in the valley zone (without proper compliance and gross violations of environmental norms). Table 5.4 highlights extent of landscape alterations and unauthorized occupation of wetlands (Agara-Bellandur wetland). Figure 5.6 gives cadastral map (1904, scale: 1 in 7920) of the region with land uses - drainage network, agriculture land parcels, tank boundaries, etc.

Table 5.4: Extent of encroachment and illegalities

Year	wetland
2007	63 Acres 37.5 Guntas
2010	66 Acres 32.3 Guntas
2012	72 Acres 15.9 Guntas
2013	74 Acres 12.1 Guntas
2015	74 Acres 12.1 Guntas

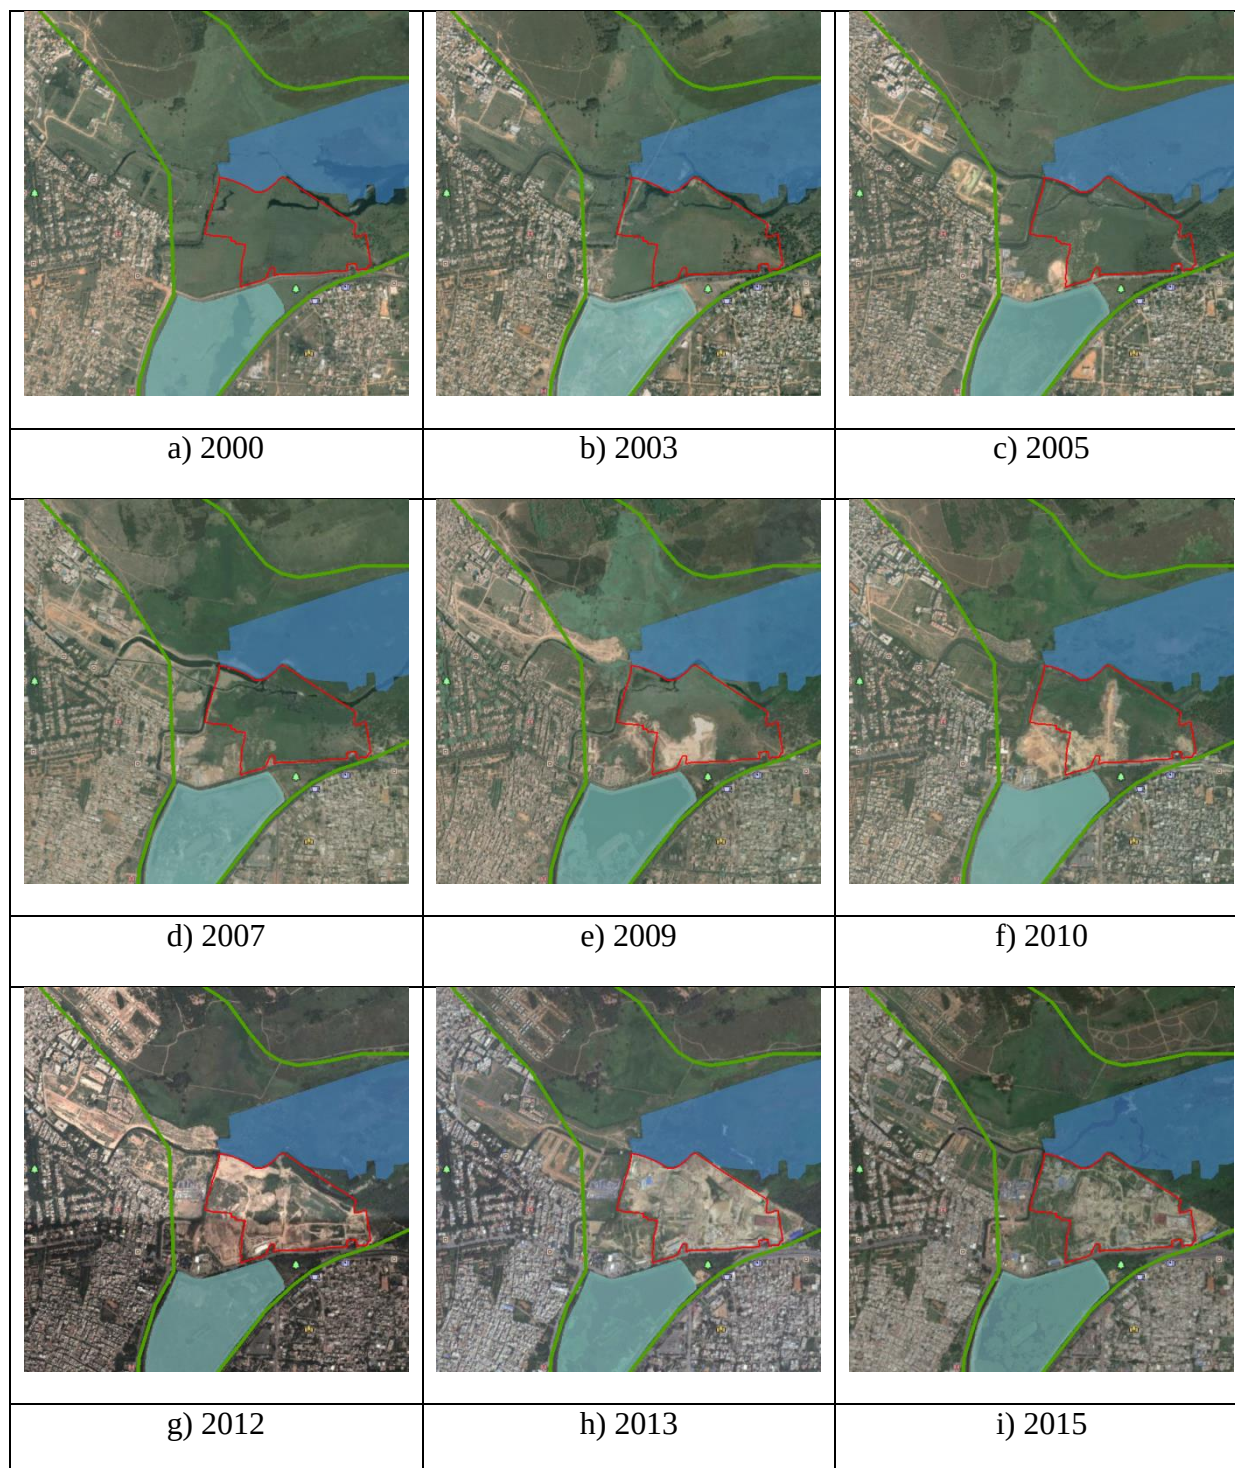


Figure 5.5: Land cover dynamics in the valley zone

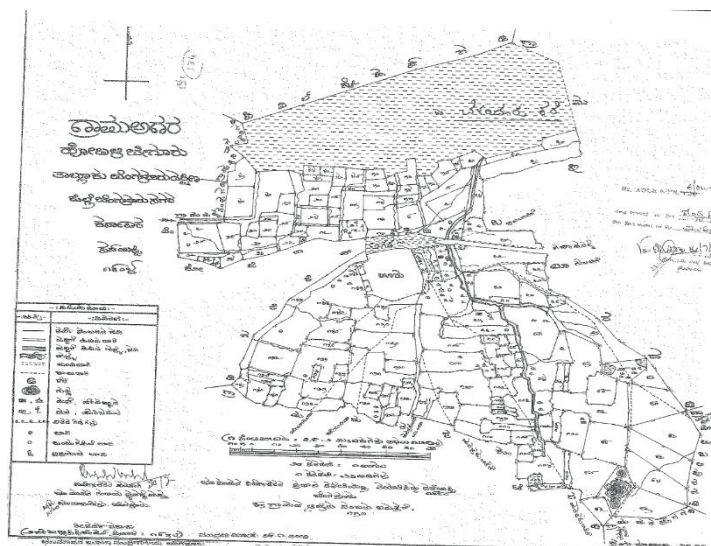


Figure 5.6: Cadastral Map with lakes (1904)

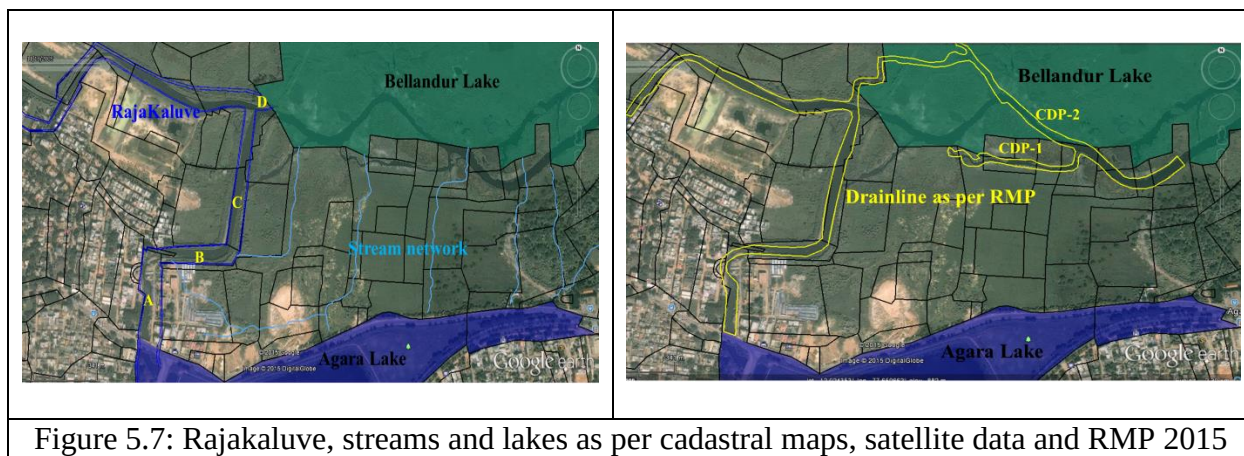


Figure 5.7: Rajakaluve, streams and lakes as per cadastral maps, satellite data and RMP 2015

Figure 5.7 highlights interconnected lake system in Agara-Bellandur region with rajakaluves and stream network. Figure 5.7 also indicates the narrowing down of rajakaluves for the period 2000 to 2015, (for the cross sections A, B, C, D). Rajakauluves have declined between 23% and 57% of the original width during the year 2000 to 2015. Table 5.5 lists applicable various norms for wetlands conservation.

Table 5.5: Various norms for lakes and rajakaluve conservation

Activities around lakes	Norms to protect and conserve Wetlands
Encroachment of lake bed and loss of interconnectivity among	The Hon'ble Supreme Court in Civil appeal number 1132/2011 at SLP (C) 3109/2011 on January 28,2011 has expressed concern regarding encroachment of common property resources, more particularly lakes (and

lakes	raja kaluves) and it has directed the state governments for removal of encroachments on all community lands. Eviction of encroachment: Need to be evicted as per Karnataka Public Premises (eviction of unauthorised occupants) 1974 and the Karnataka Land Revenue Act, 1964
Buildings in the buffer zone of lakes	In case of water bodies, 75.0 m buffer of 'no development zone' (as per recent National Green Tribunal direction) is to be maintained around the lake (buffer region to be as per revenue records) • As per BDA, RMP 2015 (Regional Master Plan, 2015) • Section 17 of KTCP (Karnataka Town and Country Planning) Act, 1961 and sec 32 of BDA Act, 1976 • Wetlands (Conservation and Management) Rules 2010, Government of India; Wetlands Regulatory Framework, 2008.
Construction activities in the valley zone (SEZ by Karnataka Industrial Areas Development Board (KIADB)) in the valley zone	This is contrary to sustainable development as the natural resources (lake, wetlands) get affected, eventually leading to the degradation/extinction of lakes. This reflects the ignorance of the administrative machinery on the importance of ecosystems and the need to protect valley zones considering ecological function and these regions are 'NO DEVELOPMENT ZONES' as per CDP 2005, 2015
Alterations in topography	Flooding of regions would lead to loss of property and human life and, spread of diseases.
Increase in deforestation in catchment area	Removing vegetation in the catchment area increases soil erosion and which in turn increases siltation and decreases transpiration
Documentation of biodiversity	• The biodiversity of every water body should form part of the School, College, People's Biodiversity Registers (SBR, CBR, PBR). • The local Biodiversity Management Committees (BMC) should be given necessary financial support and scientific assistance in documentation of diversity. • The presence of endemic, rare, endangered or threatened species and economically important ones should be highlighted • A locally implementable conservation plan has to be prepared for such species
Implementation of sanitation facilities	• The lakes are polluted with sewage, coliform bacteria and various other pathogens • Preserving the purity of waters and safeguarding the biodiversity and productivity, dumping of waste has to be prohibited

	All the settlements alongside the water body should be provided with sanitation facilities so as not to impinge in anyway the pristine quality of water
Violation of regulatory and prohibitory activities as per Wetlands (Conservation and Management) Rules, 2016 and 2010; Regulatory wetland framework, 2008	Environment Impact Assessment (EIA) Notification, 2009. Wetlands (Conservation and Management) rules 2010, Government of India; Regulatory wetland framework, 2008 Regulated activity - Withdrawal of water/impoundment/diversion/interruption of sources - Harvesting (including grazing) of living/non-living resources (may be permitted to the level that the basic nature and character of the biotic community is not adversely affected) - Treated effluent discharges – industrial/ domestic/agro-chemical. - Plying of motorized boats - Dredging (need for dredging may be considered, on merit on case to case basis, only in cases of wetlands impacted by siltation) - Constructions of permanent nature within 50 m of periphery except boat jetties - Activity that interferes with the normal run-off and related ecological processes – up to 200 m Prohibited activity iv. Conversion of wetland to non-wetland use v. Reclamation of wetlands vi. Solid waste dumping and discharge of untreated effluents
Damage of fencing, solid waste dumping and encroachment problems in Varthur lake series	High Court of Karnataka (WP No. 817/2008) had passed an order which include: - Protecting lakes across Karnataka, - Prohibits dumping of garbage and sewage in Lakes - Lake area to be surveyed and fenced and declare a no development zone around lakes - Encroachments to be removed - Forest department to plant trees in consultation with experts in lake surroundings and in the watershed region - Member Secretary of state legal services authority to monitor implementation of the above in coordination with Revenue and Forest Departments - Also setting up district lake protection committees
Polluter Pays principle	National Environment Policy, 2006 The principal objectives of NEP includes :

	• Protection and conservation of critical ecological systems and resources, and invaluable natural and man-made heritage • Ensuring judicious use of environmental resources to meet the needs and aspirations of the present and future generations • It emphasizes the “Polluter Pays” principle, which states the polluter should, in principle, bear the cost of pollution, with due regard to the public interest
Prevention of pollution of lake	National Water Policy, 2002 Water is a scarce and precious national resource and requires conservation and management. Watershed management through extensive soil conservation, catchment-area treatment, preservation of forests and increasing the forest cover and the construction of check-dams should be promoted. The water resources should be conserved by retention practices such as rain water harvesting and prevention of pollution.
Discharge of untreated sewage into lakes	The Environment (Protection) Act, 1986 • Lays down standards for the quality of environment in its various aspects • Laying down standards for discharge of environmental pollutants from various sources and no persons shall discharge any pollutant in excess of such standards • Restriction of areas in which industries, operations or processes shall not be carried out or carried out subject to certain safeguards
The water pollution, prevention and its control measures were not looked upon	Water (Prevention and Control of Pollution) Act, 1974 • It is based on the “Polluter pays” principle. The Pollution Control Boards performs the following functions : • Advice the government on any matter concerning the prevention and control of water pollution. • Encourage, conduct and participate in investigations and research relating to problems of water pollution and prevention, control or abatement of water pollution. • Inspects sewage and effluents as well as the efficiency of the sewage treatment plants. • Lay down or modify existing effluent standards for the sewage. • Lay down standards of treatment of effluent and sewage to be discharged into any particular stream. • Notify certain industries to stop, restrict or modify their procedures if the present procedure is deteriorating the water quality of streams.

Pathetic water scenario and insufficient drinking water in Bangalore	The depletion of ground water and drying up off lakes has affected the water availability to meet the current population. At the 4% population growth rate of Bangalore over the past 50 years, the current population of Bangalore is 8.5 million (2011). Water supply from Hesaraghatta has dried, Thippagondanahalli is drying up, the only reliable water supply to Bangalore is from Cauvery with a gross of 1,410 million liters a day (MLD). There is no way of increasing the drawal from Cauvery as the allocation by the Cauvery Water Disputes Tribunal for the entire urban and rural population in Cauvery Basin in Karnataka is only 8.75 TMC ft (one thousand million cubic – TMC ft equals 78 MLD), Bangalore city is already drawing more water-1,400 MLD equals 18 TMC—than the allocation for the entire rural and urban population in Cauvery basin
KLCDA Act 2014	Acts prohibited in lakes (1) use the lake for any purpose other than storage or impounding of water or for the purpose mentioned in clause (9) of section 5; (2) construct any structure on lake land, occupy any lake land or part thereof or cause any obstruction at the natural or normal course of inflow or outflow of water into, or from, the lakes on the upstream and or downstream; (3) construct any commercial, recreational or industrial complexes or houses or carry on any industrial activity within the distance to be notified by the Government depending on the water spread area of the lake; (4) dump debris, municipal solid wastes, mud or earth soil or liquid wastes or any pollutants, into the lake by using vehicle or otherwise; (5) discharge untreated sewage into the lake directly or indirectly; (6) construct roads, bridges and likewise other structures within the lake area including the tank bund; (7) breach bund, waste weir including lowering the height of the waste weir from its original height or remove fence, boundary stones or any hoarding or any sign board erected by the Authority; and (8) do any other act which is detrimental directly or indirectly to the lakes.

References:

1. Ramachandra T.V., Durga Madhab Mahapatra, Sudarshan P. Bhat, Asulabha K.S., Sincy Varghese, Bharath H. Aithal, 2014. **Integrated Wetlands Ecosystem: Sustainable Model to Mitigate Water Crisis in Bangalore**, ENVIS Technical Report 76, Environmental Information System, CES, Indian Institute of Science, Bangalore 560012
2. Ramachandra T V, Vinay S and Bharath H.Aithal, 2015. **Detrimental landuse changes in Agara-Bellandur wetland**, ENVIS Technical Report 95, CES, IISc, Bangalore, India
3. Ramachandra T V, Asulabha K S, Sincy V, Vinay S, Bharath H.Aithal, Sudarshan P. Bhat, and Durga M. Mahapatra, 2015. **Pathetic status of wetlands in Bangalore: Epitome of inefficient and uncoordinated Governance**, ENVIS Technical Report 93, CES, Indian Institute of Science, Bangalore 560012
4. Ramachandra T V, Asulabha K S, Sincy V, Sudarshan Bhat and Bharath H.Aithal, 2015. **Wetlands: Treasure of Bangalore**, ENVIS Technical Report 101, Energy & Wetlands Research Group, CES, IISc, Bangalore, India
5. Ramachandra T V, Durga Madhab Mahapatra, Asulabha K S, Sincy Varghese, 2017. **Foaming or Algal Bloom in Water bodies of India: Remedial Measures - Restrict Phosphate (P) based Detergents**, ENVIS Technical Report 108, Environmental Information System, CES, Indian Institute of Science, Bangalore 560012
6. Ramachandra T V, Vinay S, Durga Madhab Mahapatra, Sincy Varghese, Bharath H. Aithal, 2016. **Water situation in Bengaluru**, ENVIS Technical Report 114, Environmental Information System, CES, Indian Institute of Science, Bangalore 560012
7. Ramachandra T V, Durga Madhab Mahapatra, Vinay S, Sincy V, Asulabha K S, Sudarshan Bhat, Bharath H. Aithal, 2017. **Bellandur and Varthur Lakes Rejuvenation Blueprint**, ENVIS Technical Report 116, Environmental Information System, CES, Indian Institute of Science, Bangalore 560012
8. Ramachandra T V, Vinay S, Asulabha K S, Sincy V, Sudarshan Bhat, Durga Madhab Mahapatra, Bharath H. Aithal, 2017. **Rejuvenation Blueprint for lakes in Vrishabhavathi valley**, ENVIS Technical Report 122, Environmental Information System, CES, Indian Institute of Science, Bangalore 560012
9. Ramachandra T V, Vinay S, Bharath H. Aithal, 2017. **Frequent Floods in Bangalore: Causes and Remedial Measures**, ENVIS Technical Report 123, Environmental Information System, CES, Indian Institute of Science, Bangalore 560012
10. Ramachandra, T.V., Bharath H. A., and Durgappa, D. S., Insights to urban dynamics through landscape spatial pattern analysis, *Int. J Applied Earth Observation and Geoinformation*, 2012, **18**,329-343,.
11. Ramachandra, T.V., Bharath, H. A. and Sreejith, K., **GHG footprint of major cities in India**, *Renewable and Sustainable Energy Reviews*, 2015, **44**,473–495
12. Ramachandra, T.V., Bharath, H. A., Vinay, S., et al., **Trees of Bengaluru**, *ENVIS Technical Report 75*, ENVIS, Centre for Ecological Sciences, IISc, Bangalore, 2014. 75p.
13. Ramachandra T.V., Bharath H. Aithal, 2016. Bangalore's Reality: towards unlivable status with unplanned urban trajectory, **Current Science** (Guest Editorial), 110(12):2207-2208, 25th June 2016.

Disaster & Development

Journal of the National Institute of Disaster Management

Volume 3 • Number 2 • April 2009

Special Issue: Urban Floods-II

Urban Floods: Case Study of Bangalore

T. V. Ramachandra and Pradeep P. Mujumdar

Profile of the City

Bangalore is one of the fastest growing cities in India and is branded as 'Silicon Valley of India' for heralding and spearheading the growth of Information Technology (IT) based industries in the country. With the advent and growth of IT industry, as well as numerous industries in other sectors and the onset of economic liberalisation since the early 1990s, Bangalore has taken lead in service-based industries fuelling substantial growth of the city both economically and spatially. Bangalore has become a cosmopolitan city attracting people and business alike, within and across nations. This profile notes the urban setting and provides an overview of the urban fabric, while discussing various prospects related to infrastructure and governance (Sudhira, et al. 2007).

Bangalore

Bangalore¹ is the principal administrative, cultural, commercial, industrial, and knowledge capital of the state of Karnataka. Greater Bangalore², an area of 741 square kilometres agglomerating the city, neighbouring municipal councils and outgrowths, was 'notified' (established) in December 2006 (Figure 1.1 and Figure 1.2). A tiny village in the 12th century, it grew to become one of the fastest growing cities in the world by the 21st century and to figure among the million-plus cities in India³. Bangalore has grown spatially more than ten times since 1949 (Table 1.1). The city enjoys a pleasant and salubrious climate throughout the year. Its tree-lined streets, numerous parks and abundant greenery have led to it being called the 'Garden City' of India. It has also been identified as the country's 'Silicon Valley' and it is one of the technological innovation hubs with a technological achievement index (TAI) of 13⁴

* Contributed as Bangalore city team under National Coordination Project of NIDM (Anil K Gupta and P.G. Dhar Chakraborti, Disaster & Development, 3 (1): 1-14, 2009).

* Data compilation Analysis: Uttam Kumar, Sudhira H.S., Chitra S. Raju and Ranjini V.

1 The name, Bangalore has been proposed for renaming to 'Bengalooru' by the State government following suit of Bombay to Mumbai, Madras to Chennai and Calcutta to Kolkata. However, we use Bangalore all through.

2 The Urban Development Department, Government of Karnataka has issued gazette notification vide No. UDD/92/MNY/2006, dated 2.11.2006 for constituting the Bruhat Bangalore Mahanagara Palike (Greater Bangalore City Corporation) merging the existing area of Bangalore City Corporation, 8 Urban Local Bodies (ULBs) and 111 Villages of Bangalore Urban District.

3 PTBangalore is the fifth largest metropolis in India currently with a population of about 7 million.

4 Almost on par with San Francisco, USA, while Silicon Valley, USA is number 1 with TAI of 16.

according to the Human Development Report (United Nations Development Programme, 2001). However, with all the hype about growth in IT and IT based industries, Bangalore also houses numerous other leading commercial and educational institutions, and industries like textiles, aviation, space, biotechnology, etc. As an immediate consequence of this growth in the last decade, apart from creating a ripple effect in the local economy, there has also been great pressure on infrastructure and resources like water supply, energy, public transportation, land, etc. The local body and other parastatal agencies responsible for delivery of basic services are facing stiff challenges in catering to this demand.

Table 1.1: Bangalore City Corporation limits over the years

Year	Area (sq. km)
1949	69
1963-64	112
1969	134
1979	161
1995	226
2007	716

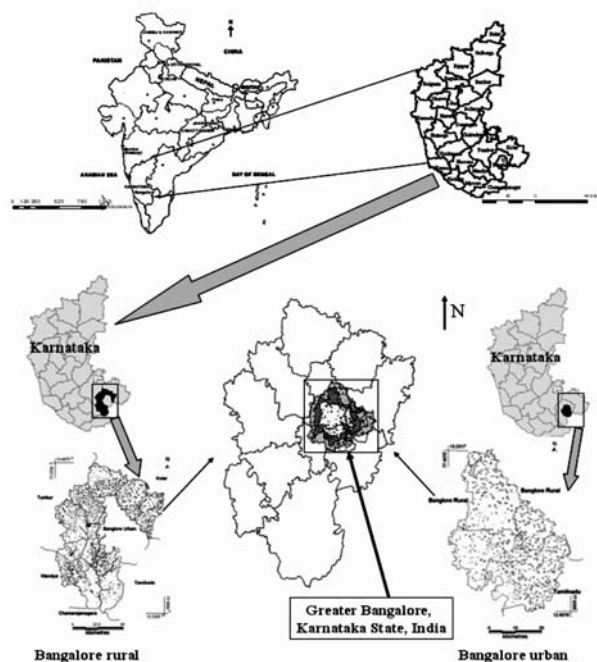


Figure 1.1. Location of Greater Bangalore

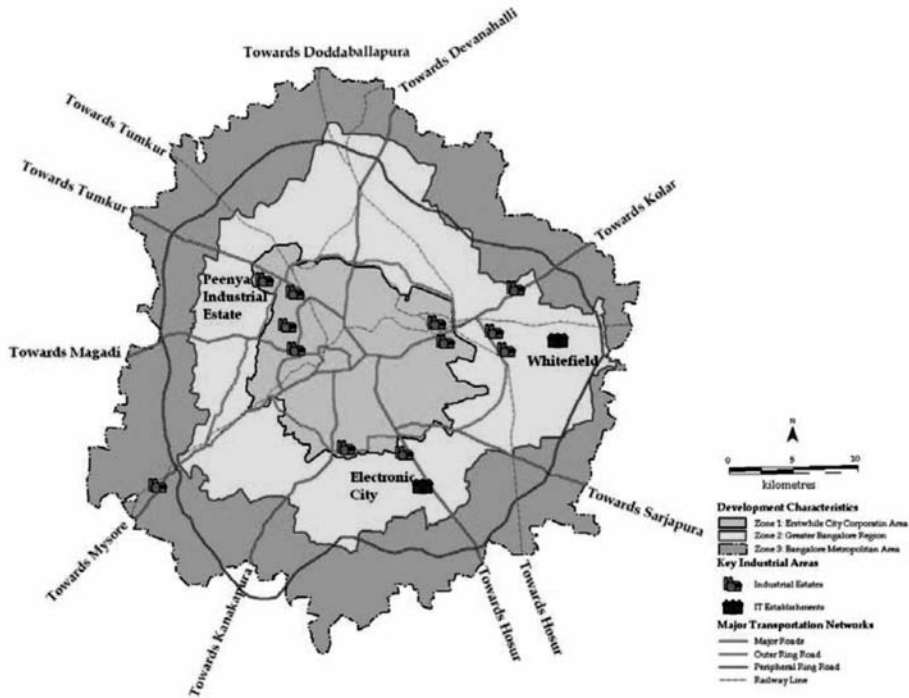


Figure 1.2: Map depicts Development Characteristic over Bangalore with the erstwhile City Corporation limits, Greater Bangalore region and Bangalore Metropolitan area and noting some of the prominent industrial areas.

Quite recently there have been serious attempts by sociologists and urban planners to characterise the city. Heitzman (2004) has analysed the nature of growth that the city experienced with the emergence of the information society, while bringing out the ingredients that led to the transformation of planning methodologies and spatial planning tools for the city. Nair (2005) has exemplified Bangalore as 'the promise of the metropolis' while illustrating the urban fabric of Bangalore over the last century. In this profile, an attempt is made to bring out the status of current infrastructure and various facets of planning and governance.

The next section deals with the origin and history of the city followed by a description of climate, geography and environment. The subsequent section considers culture, demography and economics. Lastly, the urban agenda addressing governance and infrastructure discussing the stakeholders involved, challenges in managing urban infrastructure and issues in planning and development are elaborated.

History and Culture

The earliest reference to the name, in the form '*Bengalooru*', is seen in a ninth century Ganga inscription (hero-stone) from Begur, referring to a battle that was fought in that place. The present name of the city, Bangalore is an anglicised form of *Bengalooru* which according to the popular belief is derived from *Bengaalu* - synonymous of *Benda kaalu* or boiled beans and *ooru* meaning a town. Tradition associates Hoysala King Vira Ballala (12th Century) with the origin of this name. Vira Ballala, during one of his hunting expeditions in this region, lost his way and after hours of wandering reached the hut of an old woman. This woman is believed to have offered cooked beans to the king. Pleased with her hospitality, the king named the place as '*benda kaala oor*' (town of boiled beans). But it is interesting to note that there was already evidence for name of the place much before Hoysalas. Kamath (1990) notes that Bangalore is said to have got its name from *benga*, the local Kannada language term for *Pterocarpus marsupium*, a species of dry and moist deciduous tree, and *ooru*, meaning town. However, the founding of modern Bangalore is attributed to Kempe Gowda, a scion of the Yelahanka line of chiefs, in 1537 (Kamath, 1990). Kempe Gowda is also credited with construction of four towers along four directions from *Petta*, the central part of the city, to demarcate the extent of city growth (Figure 2). By the 1960's the city had sprawled beyond these boundaries (Asian Development Bank, 2001).



Figure 2: The Kempe Gowda Tower at Lalbagh – one of the four towers Kempe Gowda built to demarcate the extent of city growth in four directions [Photo: H. S. Sudhira]

Later on, the city was administered by the Wodeyars, rulers of Mysore, until it was given as *Jagir* (with rights for general administration and collection of taxes) to Hyder Ali during late 18th Century. Hyder Ali and later, his son, Tippu Sultan, were responsible for growth and development of Bangalore in a significant way with the construction of summer palace and Lalbagh. Indeed, Bangalore was already the commercial capital during Tippu's time and the second important city after Srirangapatna, Tippu's capital. During the early nineteenth century, the city was known to have almost all coins in circulation from different places and kingdoms, thus evidencing a flourishing trade and commerce (Buchanan, 1870). The fall of Bangalore in the Second Mysore War of 1792, may also have led to the fall of Tippu Sultan in Third Mysore War of 1799, after which Bangalore became a base for the British troops and saw the establishment of the Cantonment in 1802. British control over Bangalore was initially established indirectly through the Maharaja of Mysore. By 1831 the administration of the city was taken over by the British, and in 1862 two independent municipal boards were established: Bangalore City Municipality (in the older areas), and Bangalore Civil and Military Station Municipality. At Independence, Bangalore was notified as the capital of Mysore (now Karnataka) State. In 1949, the two municipalities were merged and the Bangalore City Corporation was formed. Subsequently, to keep up with the pace of growth and development, there have been reorganizations with respect to the zones and wards within the corporation, rising from 50 divisions in 1949 to 95 wards in 1980s, 100 wards in 1995 and now about 150 wards. With the 2006 notification, the Bangalore City Corporation is now reorganized as Greater Bangalore City Corporation (Note 2).

Bangalore, in spite of the buzz around IT-based and related commercial activities, has retained much of its unique cultural ties keeping its date with its history, culture and tradition. The city is known for historical temples such as the Someshwara temple in Halasuru (neighbourhood of Bangalore) built during 12th – 13th century by Cholas, Basavanagudi (Bull Temple) built by Kempe Gowda during 16th century, Kaadu Malleshwara temple built during 17th century in Dravidian architecture, and Gavi Gangadhareshwara temple, all nestle in the middle of the city. Apart from the numerous temples that have mushroomed around the city, Bangalore also has one of the six basilicas in the country, built during the 17th century, St. Marks Cathedral built during 1808, the oldest mosque, Sangeen Jamia Masjid built by the Moghuls during the 17th century, and the popular Jamia Masjid near the City Market built during the 1940s. The 'Bengalooru Karaga' is a major annual fair associated with the Dharamaraya temple, is considered to be the actual fair of the erstwhile city, and is still persistent in the older central parts of the city. Karaga, a five-day festival of Tigalas, a community who migrated

from Tamil Nadu, has many unique features such as intense religious fervour, strict rituals, unchanged traditions over centuries, a fixed route and stops for the procession, welcome and respect shown at all the temples on route. The annual groundnut fair, 'Kadalekai Parishe' takes place in a part of old city, Basavanagudi during November-December. More recently, an annual cultural fest called 'Bengalooru Habba' ('habba' in kannada means festival) is held during the first week of December hosting various cultural programmes like music, dance and drama. The involvement of all sections of people and the unique communal harmony displayed by the special prayer at Tawakkal Mastan Darga (mosque) are also remarkable (Chandramouli, 2002).

Geography and Environment

Bangalore is located at 12.591/4 north latitude and 77.571/4 east longitude, almost equidistant from both eastern and western coast of the South Indian peninsula, and is situated at an altitude of 920 metres above mean sea level. The mean annual total rainfall is about 880 mm with about 60 rainy days a year over the last ten years.. The summer temperature ranges from 18° C – 38° C, while the winter temperature ranges from 12° C – 25° C. Thus, Bangalore enjoys a salubrious climate all round the year. Bangalore is located over ridges delineating four watersheds, viz. Hebbal, Koramangala, Challaghatta and Vrishabhavathi watersheds (Figure 3). The undulating terrain in the region has facilitated creation of a large number of tanks providing for the traditional uses of irrigation, drinking, fishing and washing. Their creation is mainly attributed to the vision of Kempe Gowda and of the Wodeyar dynasty. This led to Bangalore having hundreds of such water bodies through the centuries. Even in early second half of 20th century, in 1961, the number of lakes and tanks in the city stood at 262. These, and open spaces generally, were seriously affected however with the enhanced demand for real estate and infrastructure` consequent to urbanisation. Temporal analysis of waterbodies indicate sharp decline of 58% in Greater Bangalore attributing to intense urbanisation process, evident from 466% increase in builtup area from 1973 to 2007. Figure 4.1 provides the distribution of wetlands in 1973, 1992, 2002 and 2007 based on the respective years' remote sensing data. The analysis revealed that there were 51 wetlands (321 ha) in 1973, 38 (207 ha) in 1992, 25 (135 ha) in 2002 and dropped down to 17 with an extent of 87 ha in 2007 in the Bangalore city limits. The corresponding number of waterbodies and their areas were computed and are listed in table 1.2 (Ramachandra and Kumar, 2008). There were 159 waterbodies spread in an area of 2003 ha in 1973, that reduced to 147 (1582 ha) in 1992, which further declined to 107 (1083 ha) in 2002 and finally there are only 93 waterbodies (both small and medium size) with an area of 918 ha in the Greater

Bangalore region. Waterbodies in northern part of greater Bangalore are in a considerably poor state compared to the waterbodies in southern greater Bangalore. With the city's unprecedented growth, the large number of public open spaces diminished over the years. Much of the loss in green cover is due to the rapid change in land use. As the city grew over space and time, inner areas got more crowded and congested. Initiatives to ease congestion on road networks have led to axing numerous road-side trees. Many lakes have been converted into residential layouts, bus stands, play grounds and stadiums, etc (Figure 4.2). The built-up area in the metropolitan area was 16 % of total in 2000 and is currently estimated to be around 23-24 %. The rest of the area is occupied by either agriculture lands, quarries or other vacant land.

In the aspect of nurturing flora and fauna, the situation in Bangalore is quite complex, with prominent green spaces like Lalbagh and Cubbon Park almost at the city centre and a few water bodies, such as Ulsoor, Sankey, Lalbagh, Yediyur and Madiwala, scattered across city's landscape, the remaining green spaces in the

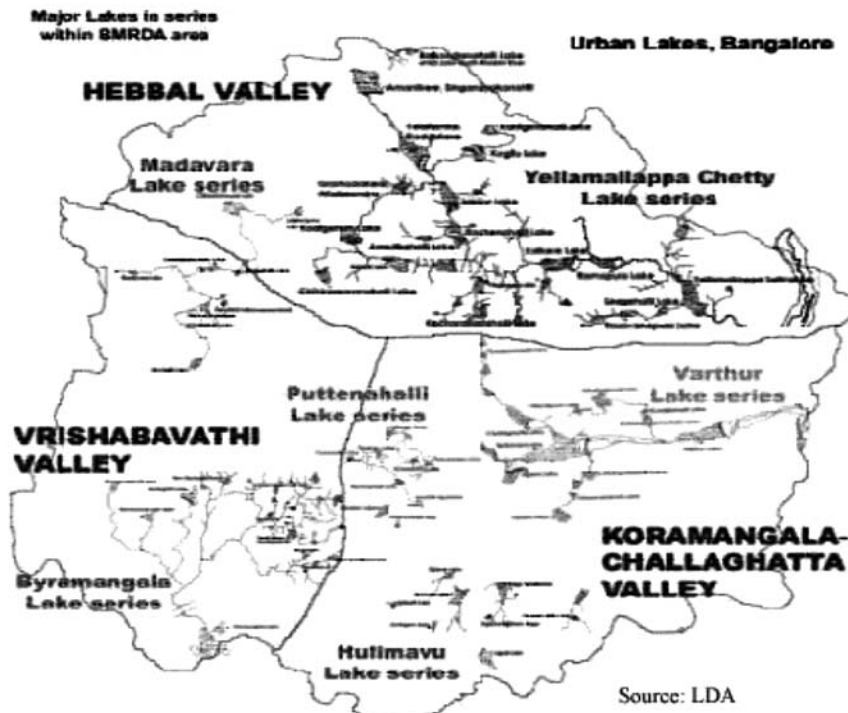


Figure 3: Cascading Lake series of Bangalore (Source: Lake Development Authority)

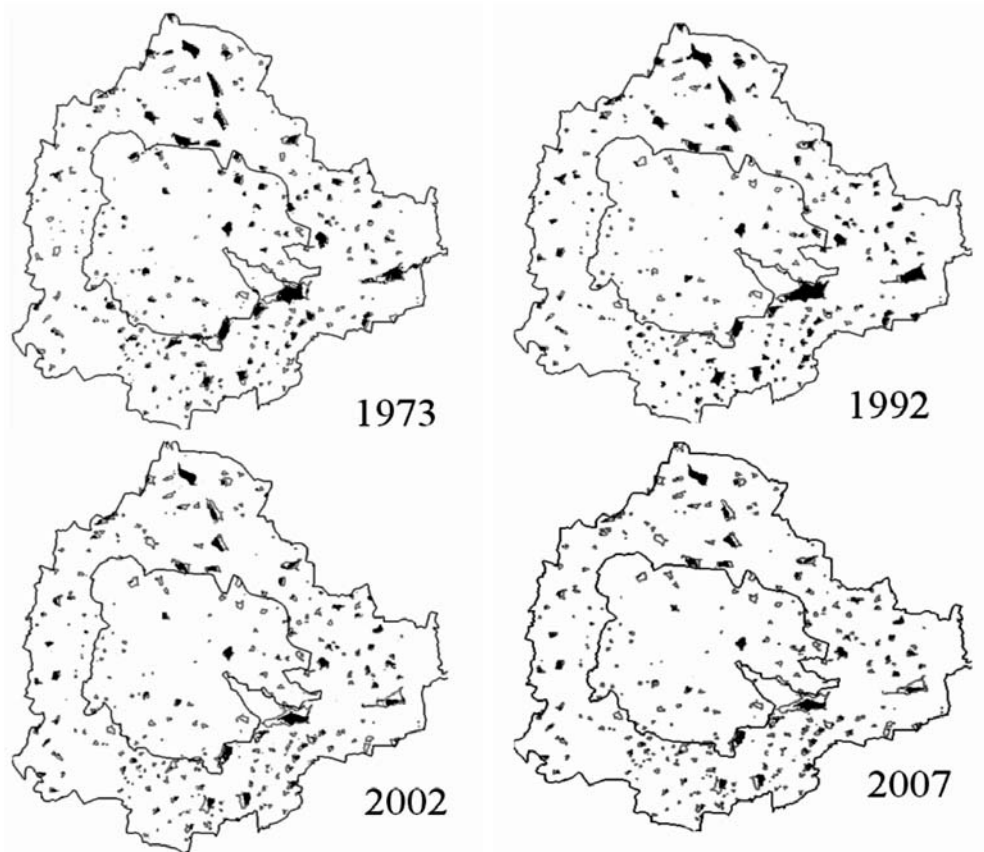


Figure 4.1: Temporal (1973-2007) changes in number of waterbodies in Greater Bangalore

periphery harbour a great number of species. In a compilation of fauna present in and around Bangalore within a radius of 40 km from city centre (Karthikeyan 1999), about 40 species of mammals, more than 340 species of birds, 38 species of reptiles, 16 species of amphibians, 41 species of fishes and 160 species of butterflies have been recorded. A new 'ant' species, *Dilobocondyla bangalorica*, was discovered in Bangalore recently (Varghese, 2006). In another study, Sudha and Ravidranath (2000) have investigated the floral assemblage in different land-use categories and the changes in vegetation over Bangalore City. About 164 species were identified in different residential areas, of which 149 were recorded within compounds and 87



Figure 4.2: Bangalore, once boasted of 81 lakes in the city limits, while now about 34 show some signs of existence. High-rise buildings sprouting across Bellandur lake.

Table 1.2: Changes in number of waterbodies during 1973 to 2007

	Bangalore City		Greater Bangalore	
	Number of Water bodies	Area in (ha)	Number of Water bodies	Area in (ha)
SOI	58	406	207	2342
1973	51	321	159	2003
1992	38	207	147	1582
2002	25	135	107	1083
2007	17	87	93	918

were avenue trees. The rich diversity speaks for the volume of life still persisting in spite of rapid urban growth.

In recent times, the increase in vehicular traffic (see section on Urban Agenda Addressing Infrastructure) has increased suspended particulate matter and other oxides of carbon, nitrogen and sulphur in the environment. Air pollution and the reduction in tree cover have induced the urban heat island effect resulting in variations in local temperature and sudden unanticipated showers during late afternoon.

Demography and Economy

The state of Karnataka was carved out in 1956 based on linguistic boundaries, with regions dominated by Kannada speaking people. Bangalore was retained as the capital of the state, with Kannada as the official language while accommodating other languages like Tamil, Telugu, Malayalam, English and Hindi, true to its cosmopolitan status,. The census of population in Bangalore has been recorded every decade since 1871, during the colonial times, the most recent census being carried out in 2001. Figure 5.1 shows the growth of population in Bangalore from 1871 to 2001 (5.7 million), along with an estimate for 2007 (7 million). Now, Bangalore is the fifth largest metropolis in India currently with a population of about 7 million. Population growth and population density changes during 1871 to 2007 is given in Figure 5.2. It is notable that since the first census, Bangalore was already the most populous city in Karnataka. This urban primacy has been retained consistently for more than a century now. After Independence, Bangalore, now a State capital, saw an influx of population migrating to the city, although it should be noted that the steep population rise in the decade 1941-1951, while due in part to this migration, also reflects the amalgamation of Bangalore Civil and Military Station Municipality with the Bangalore City Corporation. Population growth during the 1970s could be ascribed to numerous public sector industries and other defence establishments that came up during the period and fuelled significant immigration. By this time, incidentally, Bangalore had lost its tag of 'Pensioners Paradise', gained before Independence. Although the advent of IT is attributed to the late 1980s, major growth and expansion of this industry happened only during the late 1990s. Still, population growth in Bangalore in the last census decade, 1991-2001 (38%), was substantially less than in 1971-1981 (76%). Nevertheless, the physical growth of the city has been phenomenal over the last few years, and the glaring evidence of this is increased travel-times and the escalating real-estate prices.

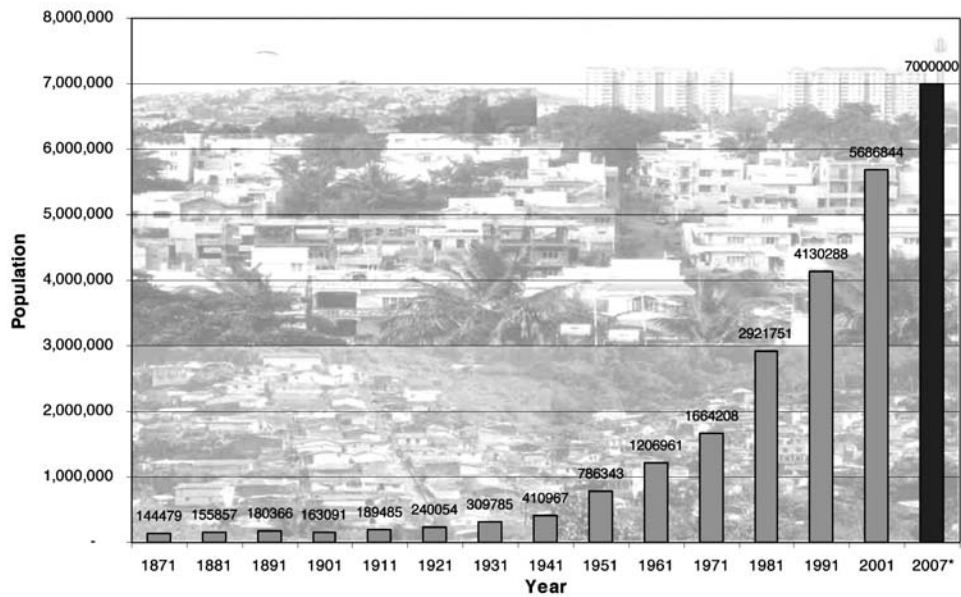


Figure 5.1: Population Growth of Bangalore City 1871 – 2007* (* The population for 2007 is an estimate) Source: Census of India (2001b)

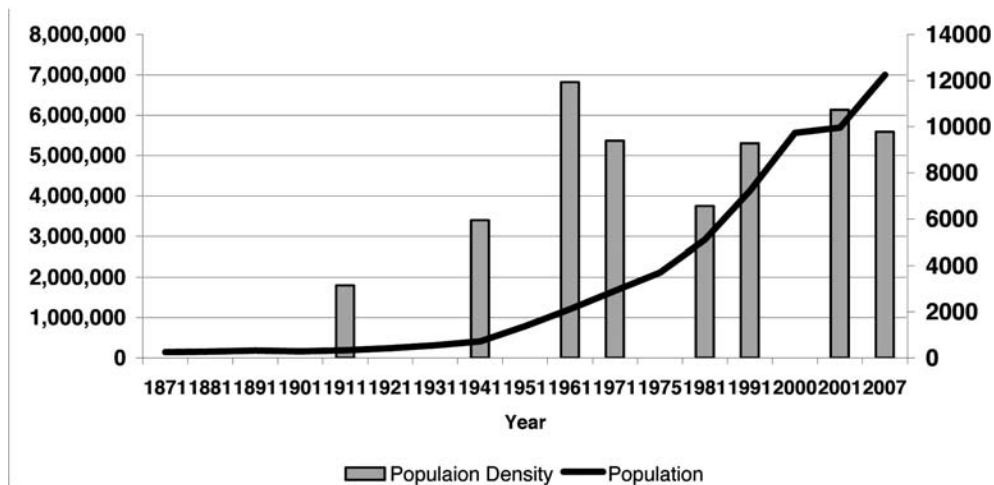


Figure 5.2: Population growth and population density

According to the latest census (Census of India, 2001a), the urban agglomeration had an overall population in 2001 of 5.7 million, including a workforce of 2.2 million, within an area of 560 sq. km, and a literacy rate of 75.1 %. The hype over the IT industry is underlain by Bangalore having about 30 % of all IT workforce in the country and a personal disposable income greater than the Indian city average. This has also resulted in a trickle down effect within the urban economy. Further, investments in industries (not only IT), infrastructure and other services, have significantly increased purchasing power among the people and have nurtured real estate with consequent land market dynamics, apart from creating numerous secondary employment in services. Interestingly enough, of the 5.7 million population in the urban agglomeration in 2001, about 2 million were migrants (Census of India, 2001b). About 1.2 million of these were from Karnataka state, mainly from the rural parts, while the remaining 0.8 million were from outside the state, the majority of these from urban areas. It is further noted that people have migrated chiefly for employment or moved with household or for education. The large number of migrant population from other parts of India explains the multitude of languages spoken and understood in Bangalore.

Bangalore is home to numerous high-tech knowledge hubs evident from the establishment of premier centres like Indian Institute of Science (IISc), National Institute of Advanced Studies (NIAS), Tata Institute for Fundamental Research (TIFR), Jawaharlal Nehru Centre for Advanced Scientific Research (JNCASR), Indian Space Research Organisation (ISRO), National Aerospace Laboratories (NAL), Defence Research and Development Organisation (DRDO), Indian Institute of Management (IIM), Institute for Social and Economic Change (ISEC), Indian Institute of Information Technology (IIIT) and several professional engineering and medical colleges at undergraduate and graduate levels. In tune with recent trends, Bangalore now has numerous malls and multiplexes that are swarmed during weekends. With an active night life and Bangaloreans penchant for fast-food, a large number of restaurants, pubs and 'eat-outs' throng the city.

The economic fabric of the city, although at times masked by the IT-based industries is varied, being also characterised by textile, automobile, machine tool, aviation, space, defence, and biotechnology based industries. In addition, numerous services, trade and banking activities mark the city's economic landscape. An important feature of the economic activities of Bangalore is the huge concentration of Small & Medium Enterprises (SMEs) in diversified sectors across the city. Bangalore has more than 20 industrial estates/areas comprising large, medium and small enterprises. Of these, Peenya Industrial Estate located in the northern part of the city comprises about 4000 SMEs and is considered the largest industrial estate in South and South East Asia (PIA, 2003). A majority

of the SMEs function as ancillaries/subcontractors to large enterprises in the field of engineering and electronics industries, among others. The industrial estates sprung up mostly in the periphery of the erstwhile city and gradually as the city grew became part of its sprawl. Notable among these are the Peenya Industrial Estate just mentioned, Electronic City and Whitefield (Figure 1.2). The proliferation of SMEs in residential and commercial areas, in addition to the industrial areas, has added to the chaos and congestion in the city. Thus, the thriving economy of the city has resulted with a net district⁵ income of Rs. 262,592 million (approx. US \$ 5.8 billion) and a per capita income of Rs. 39,420, a little more than twice the State's average per capita income of Rs. 18,360 (Government of Karnataka, 2005). Despite higher per capita income within the urban district than in the rest of the State, and with significant migrant population, the number of urban poor has been on the rise and the slum settlements in the city have not been contained. The escalating costs of land prices coupled with rise in cost of living has pushed the urban poor to reside in squatter settlements with inadequate amenities and services (Figure 6). Some of these settlements have speckled the city's landscape garnering immediate action from civic authorities. According to BMP (2006), the number of households in the urban agglomeration defined as poor was 0.22 million, housing approximately 1.1 million people out of 5.7 million population (Table 2). Noting the importance of the matter, the State Government has set up a special agency, Karnataka Slum Clearance Board (KSCB)⁶ specifically to address the redevelopment of slums in partnership with various stakeholders like the Housing Board, Local Bodies, Water Supply Boards, etc. The initiatives taken up by the local body addressing redevelopment of slums are noted in the section on Issues in Planning and Development.

Table 2: Distribution of Slums across Greater Bangalore (BMP, 2006)

Agency / Authority	No of slums	No of Households	Remarks
Karnataka Slum Clearance Board (KSCB)	218	106,266	Declared
Greater Bangalore City Corporation	324	110,991	310 Undeclared & 14 Declared
Grand Total	542	217,257	

Note: Estimates are based on 2001 Census

⁵ In the Indian federal system, each state is divided into districts (which are further divided into taluks) for administrative purposes, including decentralised implementation of developmental programmes. The State of Karnataka has 27 districts, of which Bangalore Urban is one, comprising Bangalore East, Bangalore South and Anekal Taluks. Taluk boundaries dissect the city and extend beyond the Bangalore Metropolitan Area. Thus the 'net district income' refers to the entire district and not to the city alone.

⁶ Karnataka Slum Clearance Board is responsible for slum improvement, clearance and rehabilitation of the slum dwellers.



Figure 6: The plight of urban poor in Jayanagar 9th Block [Photo: BMP]

Urban Agenda: Governance and Infrastructure

An important aspect of a city is how well it is planned, managed and administered, activities which form the core part of an urban agenda – governance. However, appropriate state mechanisms through organisational structures, procedures and policies are needed to enable these. Also, apart from the formal administrative structures, the presence and involvement of civil society significantly drive the urban agenda.

Organisations and Stakeholders

Greater Bangalore City Corporation (Bruhat Bengalooru Mahanagara Palike) is now the key ‘Urban Local Body’ (ULB), that is, the local governmental structure representing and responsible to the citizens) for the city and outlying areas. Notified in December 2006, the new Corporation replaced the erstwhile local bodies, Bangalore City Corporation (Bangalore Mahanagara Palike), 8 neighbouring councils (7 City

Municipal Councils and one Town Municipal Council) and 111 outlying villages. Independently of the Corporation⁷, which is governed by locally elected representatives, parastatal bodies controlled by the State government are responsible for many essential services (see Table 3).

Planning in the form of land use zoning and regulation are vested with Bangalore Development Authority (BDA), a parastatal agency, in spite of the 74th Constitutional Amendment Act, passed by the national parliament in 1993. This Act requires that the planning function be vested with the (elected) urban local body and not with any parastatal agency. But, in the case of Bangalore, the Corporation have not been granted adequate powers by the State to plan, decide and administer their city! Furthermore, the State has created numerous other organisations of its own to manage various services such as water supply, law and order, energy, etc. The result is the existence of many parastatal organisations, each acting in its own geographic area, leading to complication and confusion in coordinating different activities. Apart from the issue of a common geographical unit and the lack of coordinated effort, even basic information related to different sectors is extremely difficult to collect, collate and to correlate. For effective planning it is imperative that all the basic information is gathered across a common geographical unit with the effect of creating a robust city information system. In addition to the official bodies, civil society of Bangalore is known for its vibrant community participation. The spectrum of their activities ranges from literacy and green brigades to urban governance, ensuring continuous interactions with the local administration. Notable spheres of activity of these Non-Governmental Organisations (NGOs) include: improving urban governance by Citizens Voluntary Initiative for the City (CIVIC) and *Janaagraha*; improving living conditions in slums by AWAS, APSA, *Paraspara*, etc.; addressing child literacy by *Prerana* and the India Literacy Project; taking on environmental issues by the Environment Support Group, *Hasiru Usiru*, etc. Apart from the NGOs, there are numerous resident welfare associations, trade and commercial organisations, and professional organisations that have played a major role in some of the important activities of local bodies and influencing their decision-making. Civil society has contributed considerably in shaping the policies and governance structures and has always intervened whenever there has been any apathy on the part of the administration towards activities of interest to society at large. An experiment to promote public private partnership and bring together citizens, NGOs, industry representatives and the erstwhile local bodies resulted in

⁷ 'Corporation' refers to the recently notified Greater Bangalore City Corporation unless otherwise stated.

“Bangalore Agenda Task Force (BATF)”. This experiment was about to be benchmarked as one of the ‘best practices’ in urban local governance, when it faced strong criticisms from several civil society groups for setting aside priorities favouring the urban poor and was accused of making a back door entry towards policy making (Ghosh, 2005). In the event, the activities of BATF came to a standstill with the change of guard at the State government two years ago and it is currently dormant. Another instance of strong action by civil society groups, was seen when the local government started tree felling and pruning for road widening. Members of the green brigade, *Hasiru Usiru*, staged protests, held an all night vigil, stormed the Commissioner’s office and also moved to High Court and finally got the actions stayed. The High Court also ruled later that *Hasiru Usiru* members should inspect the trees along with the designated Tree Officer from the Forest Department (TOFD) before any tree felling and pruning of branches was begun.

Challenges in Managing Urban Infrastructure

Urban activities require the support of infrastructure. Broadly, urban infrastructure can be divided into social and economic infrastructure. Social infrastructure encompasses facilities like health care, education, housing, commercial (shops, markets and hotels), sports, recreation and entertainment. With mixed land use being practiced in most parts of Bangalore, shops and markets are the most commonly found amenities (approximately 1 shop per 100 persons) in the urban agglomeration⁸ (Karnataka Urban Infrastructure Development & Finance Corporation, 2006). The provision and maintenance of primary health care, elementary education, sports, recreation and entertainment are administered mostly by the Corporation, while BDA also facilitates some of the social infrastructure like shopping complexes, with provisions for private participation. Economic infrastructure encompasses water supply, wastewater treatment, storm water drainage system, solid waste management, telecommunication network, and transportation network.

Bangalore Water Supply and Sewerage Board (BWSSB) is the parastatal agency responsible for drinking water supply, and wastewater collection and treatment in the city. Bangalore is on a ridge and does not have its own year-round sources of water. Drinking water is pumped from the river Cauvery, a distance of about 100 km over an elevation of 500 m with an energy expenditure of 75 MW for approximately 900 million litres per day (MLD). Apart from the river Cauvery supply, ground water and water from the river Arkavathy are also tapped. However, while water supply distribution is 100 percent in the

8 The urban agglomeration refers to the area formally administered by Bangalore City Corporation and the 8 councils.

Table 3: Organisations Concerned with Bangalore

Organisations	Functional Areas (Scope of Work)
Greater Bangalore City Corporation [Bruhat Bangalore Mahanagara Palike (BBMP)]	Urban local body responsible for overall delivery of services - Roads and road maintenance including asphaltting, pavements and street lighting; solid waste management, education and health in all wards, storm water drains, construction of few Ring roads, flyovers and grade separators
Bangalore Development Authority (BDA)	Land use zoning, planning and regulation within Bangalore Metropolitan Area; Construction of few Ring roads, flyovers and grade separators
Bangalore Metropolitan Region Development Authority (BMRDA)	Planning, co-ordinating and supervising the proper and orderly development of the areas within the Bangalore Metropolitan Region, which comprises Bangalore urban district and parts of Bangalore rural district. BDA's boundary is a subset of BMRDA's boundary
Bangalore Water Supply and Sewerage Board (BWSSB)	Drinking water - pumping and distribution, sewerage collection, water and waste water treatment and disposal
Bangalore City Police	Enforcement of overall law and order; Traffic Police: Manning of traffic islands; Enforcement of traffic laws; Regulation on Right of Ways (One-ways)
Bangalore Metropolitan Transport Corporation (BMTCL)	Public transport system - Bus-based
Bangalore Metro Rail Corporation Ltd (BMRCL)	Public transport system - Rail-based (Proposed)
Regional Transport Office (RTO)	Motor vehicle tax; Issue of licenses to vehicles
Bangalore Electricity Supply Company (BESCOM)	Responsible for power distribution
Lake Development Authority (LDA)	Regeneration and conservation of lakes in Bangalore urban district

former Bangalore City Corporation limits, only about 20 % of the Municipal Council households are serviced. In view of the rapid growth of the city, and recent notification of Greater Bangalore, it remains a challenge to service the remaining areas.

Regarding collection and treatment of wastewater, the sewerage system is based on the city's four natural river valleys already noted and BWSSB is the nodal agency. There are three major treatment plants with a total capacity of about 450 MLD (the outlets of Koramangala and Challaghatta valleys are combined to form the K&C Valley Treatment Plant at Bellandur). Wastewater stress on natural water bodies is evident from the fact that the present wastewater treatment capacity in the city is around 450 MLD as against an estimated generation of domestic wastewater of 700 MLD. Although more secondary wastewater treatment plants are in progress, they are yet to be completed. Another problem is the frequent clogging of storm water drains, resulting in pollution of natural water bodies. Hence it is now proposed to rehabilitate and remodel all the major trunk sewers to prevent any discharge into the storm water drains.

Addressing mobility in Bangalore city, an overview of transportation and traffic reveals the following facts. Bangalore city is estimated to have vehicle population of about 2.6 million while the current city population is about 7 million. The vehicle to person ratio is far higher than any other city in India. This has led to increased congestion in road networks across the city and frequent traffic jams. Manning signalling at traffic islands have also become unmanageable with the amount of traffic plying across junctions. Again, in this sector different components related to mobility are vested with different parastatal bodies.

Public transportation forms one of the key functionalities for mobility in any urban area. In Bangalore where the working population is around 2 million, the Bangalore Metropolitan Transport Corporation (BMTC) operates on any given day with 4,144 schedules, 4,262 buses, 60,475 trips, and carries 3.5 million passengers. It earns Rs. 20.5 million per day and pay Rs. 0.955 million to the government as taxes (Bangalore Metropolitan Transport Corporation, 2006). Further, according to recent estimates, there are about 1.6 million two-wheelers, 0.32 million motor-cars, 80,000 auto-rickshaws, and 0.17 million other vehicles totalling to around 2.2 million vehicles on road (Regional Transport Office, 2006).

The onus of maintaining and improving road networks lies with the Corporation. Although a study for the City by consultants iDeCK and Rites (2005) identified 52 high and medium traffic intensity corridors requiring various interventions by different organisations, the former City Corporation proposed only to widen some of these roads. A key aspect ignored while addressing mobility is the role of land use in

generating traffic demand. Failure by the city to acknowledge this, and in particular the implications of changes in land use from residential to commercial or industrial, has led to stereotypical approaches in addressing mobility such as road widening, creation of new flyovers and underpasses, or conversion into 'one-ways'. In general Bangalore has over a period promoted mixed land use which at some level has led to inefficient usage of land. With the City's compartmentalised approaches to widening of roads or construction of flyovers and grade separators, the problem of mobility is far from being solved.

Issues in Planning and Development

To understand the development characteristics of the Bangalore metropolitan area, it may help to distinguish three concentric zones – zones which correspond closely with previous current local authority areas. The first zone would comprise the erstwhile city corporation area of 226 sq. km. The second zone would include the areas of the former 8 neighbouring municipal councils and 111 villages, which together form the peri-urban areas and are now incorporated into the Greater Bangalore City Corporation. The third zone would include other villages extending up to the Bangalore Metropolitan Area limits as proposed by Bangalore Development Authority. The development characteristics and agencies across these zones are summarised in Table 4 and depicted in Figure 1.1.

Traditionally, planning has been restricted to land use planning, being vested with BDA for the region under Bangalore urban agglomeration, and with Bangalore Metropolitan Region Development Authority (BMRDA) for the larger peripheral area comprising the rest of Bangalore Urban District^{P8P}. BDA obtains the land, develops it as residential layouts which eventually are handed over to the city corporation, often involving the extension of city limits. Land use plans are formalised through the Comprehensive Development Plans (CDP) prepared every 10 years. Accordingly, the last CDP, prepared in 1995 for the period up to 2011, was revised in 2005-06 for the period up to 2015 (BDA, 2006) and is currently awaiting approval. A key aspect of these CDPs are that they indicate the amount and location of land use allocated for various uses (like residential, commercial, industrial, etc.) as well as restricting development in specific areas demarcated as Green Belt and Valley Zones. However, another organisation similar to BDA, the Karnataka Industrial Area Development Board (KIADB), is responsible for development of industrial areas. These industrial estates are situated for the most part in the outskirts of the city and KIADB has powers under the law to take over agricultural lands for the purpose.

Generally, however, the regulation and enforcement of land use zoning regulations are dismal, leading to a large number of illegal developments and encroachments on public land – problems which have led Karnataka State to constitute a legislative committee to look into irregularities in and around the city. In the particular case of growth occurring around outer industrial areas, the urban local bodies are generally unable to provide basic infrastructure and services, thus further aggravating inefficient utilisation of land and other natural resources. With such instances prevailing especially in the areas of the former Municipal Councils, the new Corporation faces a great challenge to deliver basic infrastructure and services.

On 3rd December 2005, the Ministry of Urban Development, Government of India, launched the Jawaharlal Nehru National Urban Renewal Mission (JNNURM). This countrywide programme addresses renewal of urban areas for 63 cities encompassing nearly 70% of total urban population, its primary aim being to link the revitalisation of urban infrastructure with a specific agenda of institutional reforms. Bangalore is one of the beneficiaries under this programme with an estimated outlay of US \$ 1.7 billion over the next six years. The key mission of this programme is to support reforms-driven, fast track, planned development with focus on improving efficiency in urban infrastructure and service delivery mechanisms, through community participation and ensuring accountability of urban local bodies and parastatals towards citizens. JNNURM is made operational with two sub-missions:

- Urban Infrastructure and Governance (UIG)
- Basic Services to Urban Poor (BSUP)

The sub-mission on UIG focuses on major infrastructure projects for water supply, sanitation, sewerage, solid waste management, road network, urban transport and redevelopment of inner (old) city areas with a view to upgrading infrastructure therein, shifting industrial and commercial establishments to conforming areas, etc. The sub-mission on BSUP focuses on integrated redevelopment of slums combining housing, water supply, drainage, storm water drains, solid waste management, street lighting, and community halls.

In accordance with the JNNURM guidelines, the erstwhile Bangalore City Corporation prepared the City Development Strategy Plan (CDSP) for both UIG and BSUP (Bangalore Mahanagara Palike, 2006). The CDSP outlines only an investment plan and financial strategy for taking up various initiatives envisaged in the mission. Under BSUP, 218 declared slums in the former City Corporation limits would be taken up by KSCB for redevelopment. Further, there are 169 slums under the erstwhile City

Table 4: Development Characteristics across Bangalore

Characteristics	Development Zones		
	Zone 1	Zone 2	Zone 3
Authority	Greater Bangalore City Corporation (formerly Bangalore City Corporation)	Greater Bangalore City Corporation (formerly 8 municipal councils) and 111 Villages)	Development Authorities and other Town and Village Municipal Councils
Urban Status	Core city	Outgrowth	Potential areas for future outgrowth
Infrastructure Services	Present, but nearly choked, needs augmenting of existing infrastructure	Not fully present, with new growth, requires planning and augmentation of infrastructure	Farmlands and scattered settlements with minimal no infrastructure
Impact of growth	No scope for new growth but calls for urban renewal to ease congestion, etc	High potential for growth since already peri-urban area and emergence of new residential layouts and other developments	Mostly rural, with minimal growth currently, but potential for future growth
Planning, Development and Regulation Controls	Corporation operates building controls. Planning vested with BDA.	Corporation operates minimal building controls. Planning vested with BDA.	Planning vested with parastatal agencies: BDA and BMRDA and not other local bodies. No regulation on building/ construction

Corporation jurisdiction that remain undeclared, which would be redeveloped by the new Corporation. There are, in addition, 155 slums in the neighbouring former municipal council areas that would be redeveloped by the new Corporation and KSCB. However a draft community participation law has not been enacted and in Karnataka State most of the infrastructure projects and redevelopment plans have been administered by ULBs and parastatal agencies and not through community participation as envisioned by the mission. The result is a continuation of top-down rather than bottom-up modes of planning and delivering infrastructure and services. This calls for introspection on the implementation and achievement of the mission objectives. However, with various initiatives under JNNURM underway, it does offer hope, and perhaps promise, and in improving the essential urban infrastructure and services in city.

Conclusion

Bangalore, with all due respect to its status as 'Silicon Valley' and 'Garden City', faces real challenges in terms of addressing and delivery of basic infrastructure and services to all its stakeholders. In spite of numerous initiatives and activities envisaged by the urban local bodies, past and present, and by parastatal bodies, the rationalisation of geographical units for these activities could mark the beginning of a coordinated effort in addressing the needs of the city. In the wake of recent notification of Greater Bangalore City Corporation and initiatives under JNNURM, Bangalore is currently experiencing a strange transformation. Bangalore also stands out as a beacon of globalising world and to sustain this, it needs to systematically address the key challenges facing the city in terms of governance and infrastructure.

City Infrastructure with special reference to Drainage

Bangalore Roads

Bangalore population has been growing at a rate of 2.8 to 3.20% per year during the last two decades. There has been a phenomenal growth in the population of vehicles as well especially the two and four wheelers in this period due to rising household incomes consequent to IT sector boom in the region. The number of motor vehicles registered has already crossed three millions. The issues relating to traffic and transportation in a large and growing city like Bangalore need to be viewed in the larger perspective of urban planning and development. Issues relating to land use planning and development control, public-private transportation policy, industrial locations and IT corridors would need to be integrated at the perspective planning level.

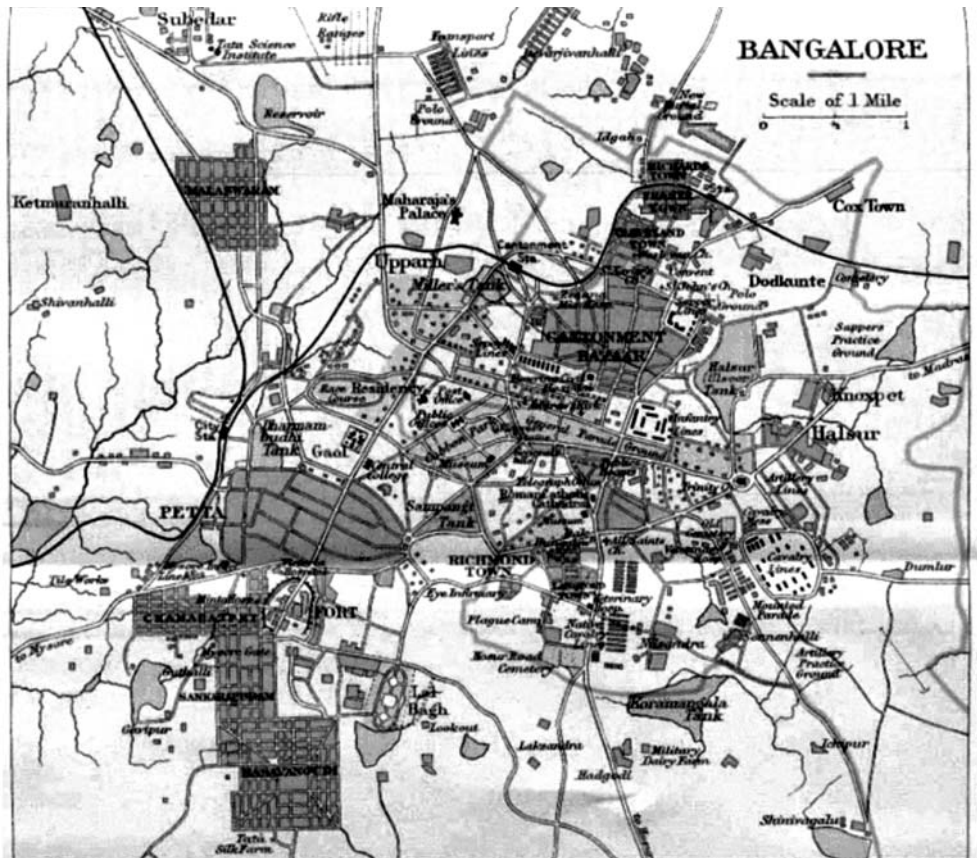


Figure 7.1: Road network in erstwhile Bangalore (Source: Murray's 1924 Handbook)

Bangalore's road network exceeds 3,000 km and consists of ring roads, arterial roads, sub-arterial roads and residential streets. The city road network is mainly radial, converging in the centre. The main roads of Bangalore coming into the city include Bellary Road in the north, Tumkur Road and Mysore Road in the west, Kanakpura Road and Hosur Road in the south and Airport Road and Old Madras Road in the east (Figure 7.2, and 7.1) . Many of Bangalore's erstwhile colonial and town streets were developed into commercial and entertainment areas after independence. The B.V.K Iyengar Road became the retail hub of Bangalore, while MG Road, Commercial Street and Brigade Road became important shopping, recreation and corporate areas . Consequently, traffic increased exponentially, especially on MG Road, which forms the main artery for the city's east-west traffic. But for MG Road, other roads in and around the erstwhile Parade Ground remain narrow, winding roads. Road network capacity is inadequate. Most of the major roads are with four lane or less with limited scope of their widening. This indicates the need for judicious use of available road space.

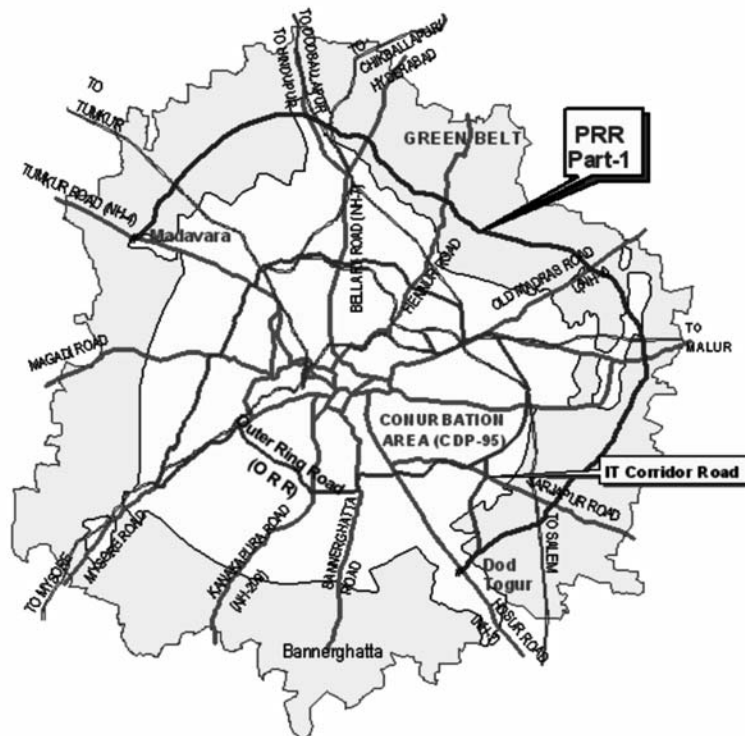


Figure 7.2: Road network as on 2007 (source: www.bdabangalore.org)

The maintenance and construction of roads to address the growing traffic in the city has been a challenge to the BDA and the BBMP. Development of the city road infrastructure has revolved around imposing one-way traffic in certain areas, improving traffic flow in junctions, constructing ring roads, bridges, flyovers and other grade separators. Six high volume junctions were identified for improvements, through a private public partnership involving corporate sponsors and various state government agencies, such as the Siddapur Road and Hosur Road junction, sponsored by Infosys and the Airport Road and Intermediate Ring Road junction. Flyovers were constructed in the city to ease traffic congestion. Newer flyovers were planned for the city for 2006 and beyond (HTUhttp://en.wikipedia.org/wiki/Infrastructure_in_BangaloreUTH). Area of the BMP has been increased as per Revised Master Plan-2015. This plan has provided for densification of existing areas, Mutation corridors, hitech areas etc in various parts of the city. This is likely to have a major impact on traffic demand. The transport network including mass transport system needs to be planned taking the proposed development in to consideration.

Solid Waste Management

The city is facing acute problems related to solid wastes. This is despite the fact that the largest part of the municipal expenditure is allotted to management of municipal solid wastes. The current waste generation in Bangalore is 3613 tonnes per day and the number is likely to grow in the next few years due to the increasing population and will present a formidable challenge to authorities unless an integrated approach is taken. The objective of this paper is to present an overview of the current waste management practices in Bangalore and to discuss suitable methods to overcome the constraints. This paper was built up on various interviews conducted with the authorities and of experiences and observations (Ramachandra, 2006; Ramachandra and Saira Varghese, 2003).

An overview of the current waste management practices in Bangalore

Bangalore City is divided into 100 administrative wards, which have been further divided into 273 health wards for functional convenience (Ramachandra and Saira Varghese, 2003). Of these, 147 health wards are under private contract system and the remaining 126 health wards are managed through Pourakarmikas (municipal sweepers) of the Corporation. Except for few wards in Bangalore there is no door-to-door collection service in Bangalore. The areas not served are mostly unincorporated or illegal settlements and slum areas with small and inaccessible streets. By contrast more prosperous areas are better served, kept clean and swept on a regular basis.

Waste generation: The waste generation in Bangalore is given in Table 4.1:

Table 4.1: Waste generation in Bangalore

Stakeholders	Quantity of Waste (tonnes/day)	%
Households	650	18
Commercial Establishments	1436	39
- Markets	369	1067
- Hotels		
Institutes	128	4
- Hospitals	20	
- Offices	16	
- Educational institutions	92	
Industries	1399	39
Total	3613	100

Source: Beukering, et al., 1999

As evident from the table, wastes from commercial establishment make up for the bulk of the total wastes. Although industries also generate a significant amount, it was analysed that most of this is recovered for recycling and reuse and only a small percentage find its way into the city waste stream.

A typical waste composition for major Indian cities is given in Table 4.2

Table 4.2. Composition of urban solid waste in Indian cities (percentage by weight)

City	Paper	Metals	Glass	Textiles	Plastic ¹	Ash, dust	Organics	Others ²
Chennai	5.90	0.70	-	7.07	-	16.35	56.24	13.74
Delhi	5.88	0.59	0.31	3.56	1.46	22.95	57.71	7.52
Kolkata	0.14	0.66	0.24	0.28	1.54	33.58	46.58	16.98
Bangalore	1.50	0.10	0.20	3.10	0.90	12.00	75.00	7.20
Ahmedabad	5.15	0.80	0.93	4.08	0.69	29.01	48.95	10.39
Mumbai	3.20	0.13	0.52	3.26	-	15.45	59.37	18.07

Source: Planning Commission on "Urban Solid Waste Management in India", GOI (1995), The expert Committee, 2000

¹ Includes rubber and leather

² Includes bones, stones and wooden matter

As evident from the Table above, the composition of organic waste is high in all the cities and Bangalore ranks the highest. Waste densities and moisture contents are high, which require different technology and management system. High organic content and low biodegradable waste are typical of Indian cities and hence incineration is a less appropriate option.

Waste storage: Waste is stored in 14,000 bottomless and lidless cement bins having 0.9 meters diameter and 0.6 cubic meter storage capacity and large masonry bins for depositing waste placed at a distance of 100-200 meters. Recently 55 metal containers have been placed at different parts of the city. However not all parts of the city are provided with storage systems. In some places, the wastes are just deposited on roadsides.

Waste collection and transport: Collection of waste is either done by Bangalore Mahanagara Palike (BMP) or by private contract system. In December, 2001 BMP and Bangalore Agenda Task Force (government appointed body) through a joint initiative established a public private partnership, by launching a sustainable cleanliness program called 'Swachha Bangalore'. Twenty five percent of the city is served under this scheme. Swachha Bangalore is mainly door to door collection of wastes using pushcarts (Plate 2.1). There are totally 2105 pushcarts in operation in Bangalore, which consists of 4 buckets that are used to store dry wastes and wet wastes separately. Swachha Bangalore scheme also covers selected slum areas and auto tippers have been deployed for collection of wastes (Plate 2.3). There are 6500 pourakarmikas in charge of door to door collection, sweeping, emptying dustbins and clearing black spots. They arrive at a designated spot to transfer the waste to the truck. Trucks have a capacity of 4-5 tonnes capacity and are either openbodied or covered with a mesh (Plate 2.2). The ratio of truck to ward is 4:20. Other collection systems consist of bullock carts, tricycles etc. Collection is sometimes difficult due to narrow roads and due to this waste is not picked on time causing unsanitary conditions. There are no transfer stations in Bangalore.



Plate 2.1. Pushcart



2.2. Waste transfer



2.3. Auto tipper

Transportation of wastes to disposal site is done in two ways through the same trucks.

- by engaging 82 trucks of the corporation;
- through contractors by engaging 129 vehicles for layouts and markets and 72 vehicles on contract for transportation of waste.

The corporation also has 13 dumper placers for transporting metallic containers of 2.5 to 3 tonnes capacity and 6 minicompactors for transportation of wastes.

Waste processing and recovery: The method adopted to process waste is composting. Karnataka Compost Development Corporation handles 120 metric tonnes of raw garbage/day in the yard. Out of 100 tonnes of raw garbage, 55 tonnes of compost is obtained. Due to constraints of land, finance and demand, the facility can handle only 120 tonnes of wastes. As such out of the 369 markets in and around the city, only 2 have been accepted for composting. Vermicomposting is also practised to handle a portion of the waste. Dry wastes such as plastic, rubber, glass and other contraries are later disposed off.

Waste disposal: Disposal is the final stage of waste management system. About 90% of the municipal wastes collected by the civic authorities in Indian cities are dumped in low-lying areas outside the city/town limits. The waste disposal trends in major Indian cities are as given in Table 4.3.

Table 4.3 Waste disposal trends in India

Waste disposal methods	1971 – (40 cities)	1991 and 1999 (23cities)
Land dumping	Almost all	89.8%
Composting	-	8.6 %
Others (pelletisation, vermi-composting)	-	1.6 %

In Bangalore, the waste collected from roads and bins is directly transported to the final disposal site, usually an open dump. There is the likelihood of soil and groundwater contamination due to this practice. Birds (scavengers), vermin, insects and animals are attracted to the open dump for feeding and breeding. Since many of these may act as disease vectors, their presence may constitute a potential health problem. Sometimes plastic and other contraries are burnt, which may be hazardous to human health. Landfilling of wastes is not practiced in Bangalore. Figure 7.3 provides information on

the various SWM options in Bangalore. Recycling takes up 43% and is an area to be further exploited. Thirty one percent of the waste is disposed, which is mainly burnt or simply dumped in open spaces.

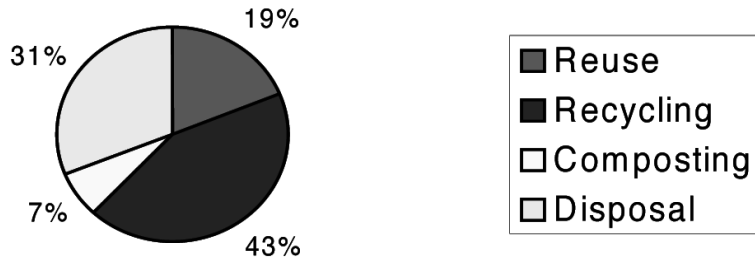


Figure 7.3: SWM Options in Bangalore

Under the Central Government Municipal Solid Wastes (Management and Handling) Rules, 2000, gazetted in India on 25th September 2000, all municipal authorities must:

1. Provide a waste collection service to all domestic dwellings, including slums and squatter areas, and commercial premises (note that no distinction is drawn between urban and rural areas).
2. Provide waste storage facilities which do not create unhygienic and unsanitary conditions;
3. Remove waste stored in the above facilities on a daily basis and in a manner such that manual handling by sanitary workers is avoided; and
4. By no later than the end of 2003, establish waste processing facilities and landfills at which:
 - the biodegradable fraction of municipal solid waste is only processed by biological conversion technologies; and
 - landfilling is restricted to non-biodegradable, inert waste and other waste that is not suitable either for recycling or for biological processing.

It is apparent that none of these, are presently being met in a satisfactory way in Bangalore. In this regard, recommended waste storage, segregation and collection, treatment and disposal (Ramachandra and Shruthi, 2007) are:

1. Adoption of door-to-door collection service daily, in all urban areas, including slums, where practical and affordable to do so. The household waste storage bins are collected, emptied and returned by the sanitary worker from the front of the residential premises at a predetermined period of the day (i.e. morning or afternoon) and day of the week. Community waste storage system in all markets, commercial and industrial premises, and domestic premises where it is either not practical or affordable to provide a door-to-door collection service. This will probably include multi-storey dwellings and rural areas where population densities are low. These containers are positioned to ensure convenience to users, particularly women who are the primary users, and hence minimise illegal littering and dumping practices. Segregation of waste at source in domestic, markets, restaurants and hotels and other commercial and industrial premises where biodegradables constitute a major component of the waste stream into wet and dry fractions.
2. A network of local and regional waste modular transfer stations is established throughout the region and municipal solid waste is hauled in bulk from these transfer facilities to the closest regional waste processing facility.
3. Decentralised biological treatment facilities are established and operated by the community based organizations at local levels (with the technical and financial support) where it complements the formal systems. Further expansion of the Karnataka Composting Development Corporation (KCDC) biological processing facilities are undertaken and similar units be initiated in other parts (Figure 7.4). Landfills are established close to biological processing facilities for disposal of waste processing rejects and other wastes not suitable for recycling.

Sewage System

Bangalore is located over ridges and the city's topography is characterized by a series of well defined valleys which radiate from a ridge (Figure 3) of high ground to the north of the city and fall gradually towards a wide belt of flat cultivated land extending beyond the limits of the BMP boundary to the south. Four major watersheds are Hebbal, Koramangala, Challaghatta and Vrishabhavathi. Three of the valleys, Vrishabhavathi (V-Valley), Koramangala (K) and Challaghatta (C), run generally in a north to south direction and divide the greater part of the metropolitan area which lies to the south of the ridge into three separate and distinct drainage zones. A fourth major valley, referred to as the Hebbal series, forms the drainage zone to the north of the ridge and runs in a north-easterly direction. Five minor valleys, the Kathriguppe and the Tavarakere to the south, the

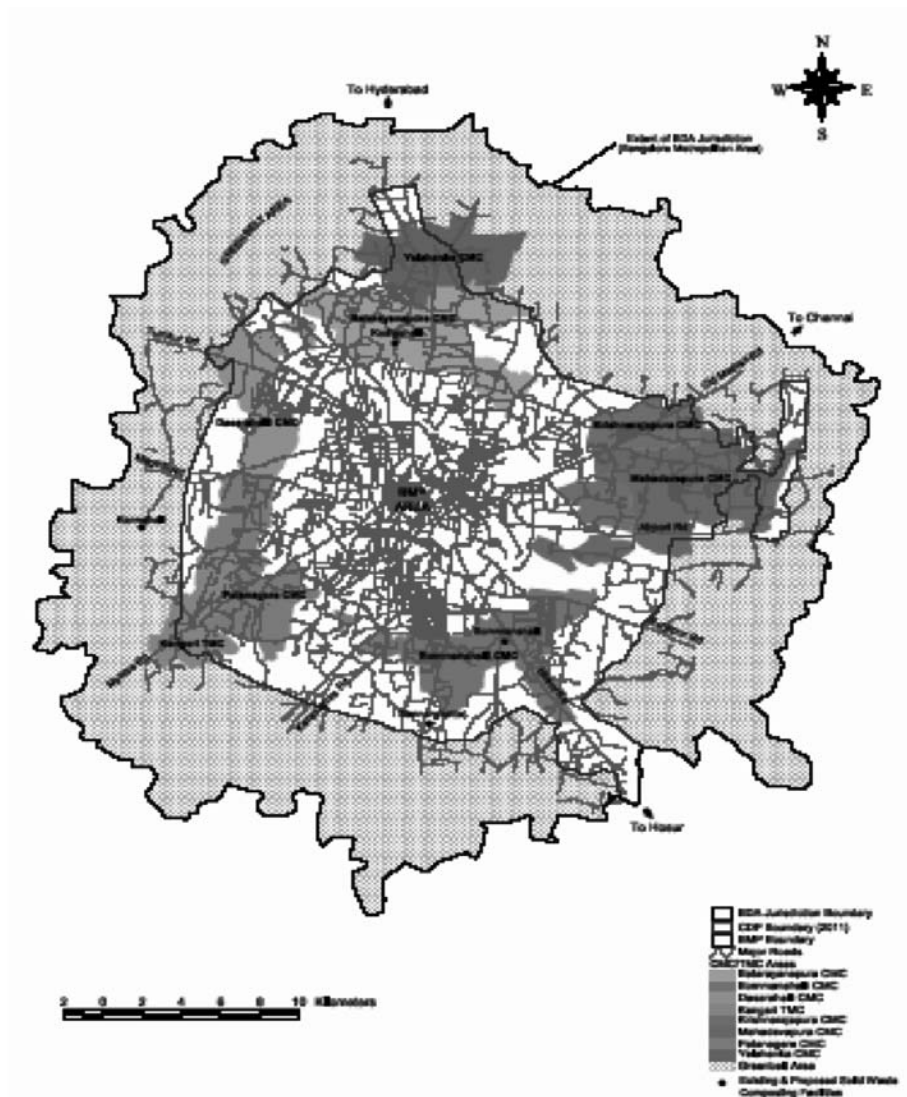


Figure 7.4: Road network in core area and CMC's with SW treatment facilities

Arkavathi and Kethamaranahalli to the north-west, and the Marthahalli to the east, lie outside the tributary areas of the major valleys and these drain independently the fringe areas which form the remainder of the metropolitan area. Table 5 lists the major and minor valley with the respective catchment area (BWSSB, 2003).

Table 5: Major and Minor Valleys in the core area of the city

Sewerage Zone	Major Valley(s)	Area (km ²)	Minor Valley(s)	Area (km ²)
Vrishbavathi (V – Valley)	Vrishbavathi	38	Katrhiguppe Kethmaranehalli & Arkavathi	16 35
Koramangala and Challagatta (K&C Valley)	Koramangala Challagatta	71	Tavarekere	19
Hebbal	Hebbal	32	Hebbal I	11

History of sewage systems in Bangalore: Plague outbreak in 1889 forced the town administration authorities to provide wider roads, open drains and sewage carrier lines. Localities such as Basavanagudi and Malleswaram were provided with conservancy roads and a good network of drains. The system for the conveyance of domestic and industrial waste was established in Bangalore in early thirties, which was initially confined to the densely populated old parts of the city. Following completion of the Thippagondanahalli reservoir in 1940's, the extension accelerated. The old city and 60% of the former Civil and Military area had been sewered by 1960's, and about 60,000 connections had been made to the sewers. Then followed the major sewerage development under the first three phases of the Cauvery project (CWSS), extending from the mid-1970's to late 1990's.

Coverage of Sewerage in Bangalore: The sewerage system in Bangalore has been guided by the nature of the topography formed by natural ridges and valleys and sewers were laid along natural channels to save on pumping costs. The sewerage system covers about 229 km² and is made up of four principal drainage areas (major valleys) which drain to three wastewater treatment plants. Sewage flows from three of five minor valleys are intended to be treated at two of these treatment plants. The existing sewage system is given in Figure 8.1 and Figure 8.2 shows the drainage zones together with the major sewer system (sewers of 450mm diameter and above).

Sewerage and sewage treatment provided under CWSS Stages I, II & III since the 1970's in four major valleys (Vrishabhavathi, Challaghatta, Koramangala and Hebbal) and five minor valleys (BWSSB, 2003). Wastewater from the two major valley zones of Koramangala and Challaghatta is collected and treated at K&C Valley STP at the southern extremity of the same zone on the northern edge of Bellandur Tank. The Tavarekere Minor Valley is also a part of the contributory area of this treatment plant.

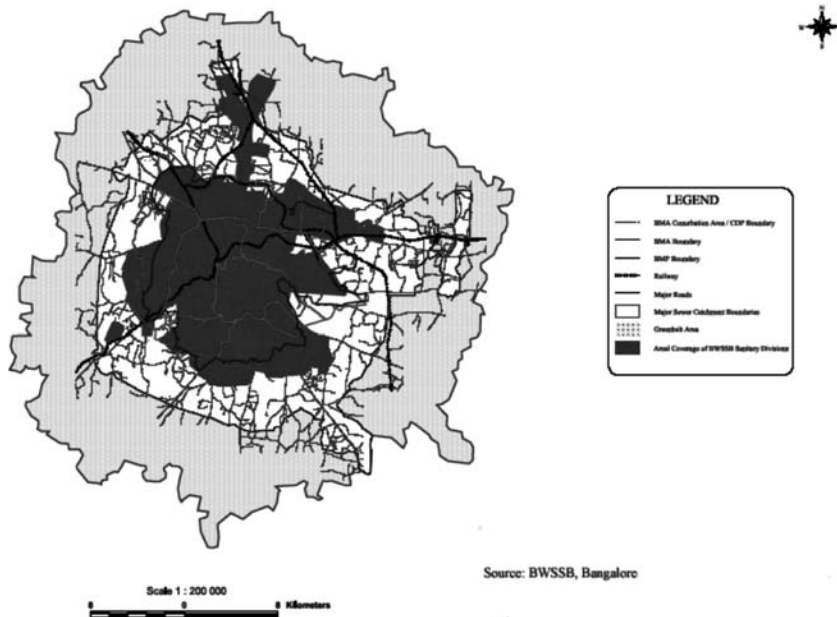


Figure 8.1: Major sewer system in Bangalore core area

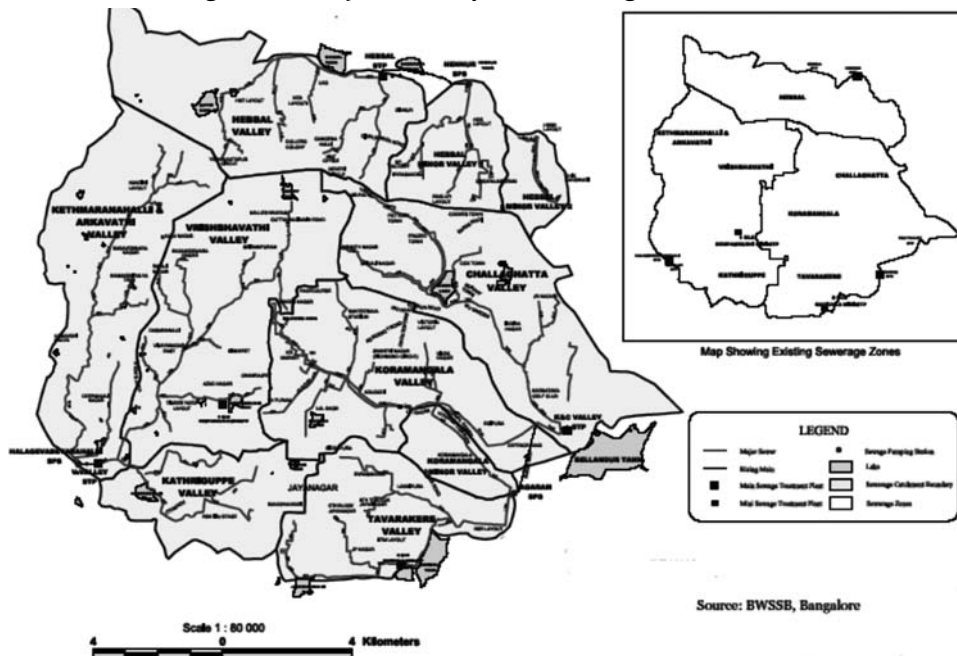


Figure 8.2: Drainage zones with major sewers

The Vrishabhavati Valley zone is part of a contributory area to the V-Valley STP in the south-west of the city which includes the minor valleys of Arkavathy and Ketmaranahalli (A&K) and Kathriguppe. The Hebbal zone to the north is served by a sewage treatment plant near the Nagavara tank; it has an associated minor valley to its east.

- Main and sub-main sewers were laid along the major valleys (V-Valley, K-Valley and C-Valley); and sewage treatment plants providing primary treatment only were constructed for the V-Valley (123 MLD) and K&C valley (163 MLD) catchments under CWSS Stage I.
- Main and sub-main sewers were constructed in the minor valleys from 1981 to 1984 (K&A, Kathriguppe and Tavarakere); main and sub-main sewers were laid in Hebbal (1982 – 1984); a 60 MLD sewage treatment plant was constructed at Hebbal (1989 - 1999); the V-Valley STP was expanded from 123 MLD to 180 MLD (1990 to 1999) and secondary treatment added; and secondary treatment was added at the K&C STP (1989 – 1999) (without increasing overall capacity but with screens and detritors sized for 218 MLD) under CWSS Stages II & III,.
- Under Cauvery IV Phase I, trunk sewers, pumping stations and seven sewage treatment plants in eight zones, will serve the peripheral area of the city, the zone between the outer boundary of the existing sewerage catchments and the BMA conurbation boundary.

Most part of the sewerage system operates under gravity in the drainage zones, while three pumping stations have been deployed to pump flows from the minor valleys to the main valleys: Halagevadeyarahalli SPS in the south-west of the city serving the A&K Minor Valley; Hennur SPS in the north-east (Hebbal); and Agaram SPS in the south which serves Tavarekere Minor Valley and part of the Koramangala Valley.

Bangalore is currently served by three major sewage treatment plants, all providing secondary treatment, with a combined capacity of 403 MLD. Two recently constructed much smaller plants (total capacity 9 MLD) also exist, these having been provided by BWSSB to rejuvenate lakes (BWSSB, 2003). The STP's are:

- V-Valley STP, a plant first commissioned with primary treatment in 1974 (123 MLD), then upgraded in the 1990's (commissioning in 1999) to 180 MLD with secondary treatment by trickling filters. This plant serves V-Valley and the Kathriguppe and K&A minor valleys;
- K&C STP, a plant also constructed with primary treatment only in the 1970's (163 MLD), then upgraded to secondary treatment by activated sludge in the late 1980's (commissioning 1990). This plant serves the Koramangala and Chalaghatta

valleys and Tavarakere minor valley;

- Hebbal STP, a 60 MLD plant with secondary treatment provided by activated sludge, commissioned in early 1999. This plant serves the Hebbal Valley catchment as well as a minor catchment served by Hennur SPS;
- Madivala STP, an 8 MLD ultimate capacity plant in the Tavarakere Minor Valley which provides treatment by UASB and oxidation ponds, the treated effluent providing rejuvenation to Madivala Tank. The plant has been operating for nine months; and
- Kempambudhi STP, a 1 MLD plant in V-Valley which treats sewage to secondary standard using the extended aeration process ; the treated effluent will rejuvenate Kampambudhi Tank.

Major problems in these sewer systems are:

- encroachment of sewers by buildings preventing access for maintenance;
- siltation of sewers, unrepaired broken pipe bridges – with sewage discharging to the drains;
- sewer crown corrosion leading to sewer collapses;
- poor design and construction standards- lack of conformance to Indian Standards (CPHEEO) on the current sewer laying contracts in the primary drain of V-Valley
- sewage diversions by farmers for irrigation purposes in the V-Valley and Kathriguppe valleys.

Stormwater System

Four major storm water catchment systems (Vrishabhavathi Valley; Challaghatta Valley; Hebbal Valley; and Koramangala Valley) pass from the city's ridge in the north to an enclosed lake system at the perimeter of Bangalore (Figure 3). Waterbodies are part of these four major waterways "valley" systems, which drain the majority of the city's storm water to large tanks or lakes, which were traditionally used for recreation and water supply for irrigation. These waterways with interconnected lakes in addition to their primary function as flood carriers, have provided the city with reasonable ecological and recreational values. The urban growth in recent times, not guided by strong strategic planning or development control measures to minimise the impacts on existing infrastructure, on the surrounding environment, and in particular on the storm water system, had severe impacts on waterways. This has lead to the depletion of waterways in addition to pollution and wastewater discharge to the storm water system.

One of the main problems that characterises the storm water system in Bangalore is that the larger sewer pipes are frequently located in the drainage channels (Plate 2.4). This has led to the significant reduction in the storm water system with obstruction from sewers and also from the sewer manholes. These sewer manholes and other structures cause significant turbulence and redirection of the storm water flows, during high storm water flows, resulting in erosion of the bed and bank instability (Plate 2.5). This also restricts drainage rehabilitation and maintenance works, including stabilisation, widening and de-silting activities. Manholes in drainage channels trap significant amounts of solid waste as well as localised sediment deposit due to the reduction in velocity of flows. In addition to this, sewer maintenance and construction in the drainage channel contributes major quantity of sediment. During periods of high storm water flows, floodwater sometimes back-up into houses through the sewer connections.

Road drains typically consist of a box shaped trench on either side of the road, covered by slabs in the core areas of the city. The inlet pits consist of an open pipe or hole in the side of the road, with no grating covers. These inlets are generally not located in the lowest point in the road and are slightly above the road gutters, which results in ponding in low lying areas before storm water flows into the drains. These roadside drains connect to secondary drains and finally to the main open channel drains. Main drains consist mainly of open channels lined with concrete retaining walls, especially in the built up area. The levels of service provided by drains has diminished in most areas due to increasing degrees of imperviousness and encroachment on drainage waterways by building, roads, culverts and other infrastructure, such as sewers (BWSSB, 2003).

Flooding is a wide-spread problem through-out the drainage system due to lack of drainage upgradation consequent to the increase in impervious area due to land use changes in the catchment from open space to high-density urban developments. This is compounded by the encroachment of drains and filling in the floodplain on the waterways, obstruction by the sewer pipes and manholes and relevant structures, deposits of building materials and solid wastes with subsequent blockage of the system and flow restrictions from under capacity road crossings (bridge and culverts).



Plate 2.4: Manhole and a sewer connection – obstruction as well as pollution (Source: BWSSB)



Plate 2.5: Sewer manhole and dumping of solid waste – reducing channel section (Source: BWSSB)

Drainage System

Lakes and wetlands are an essential part of human civilization meeting many crucial needs for life on earth such as drinking water, protein production, energy, fodder, biodiversity, flood storage, transport, recreation, climate stabilisers and also they aid in improving water quality by filtering sediments and nutrients from surface water. Wetlands play a major role in removing dissolved nutrients such as nitrogen and to some extent heavy metals (Ramachandra, 2002). They are getting extinct due to manifold reasons, including anthropogenic and natural processes. Burgeoning population, intensified human activity, unplanned development, absence of management structure, lack of proper legislation and lack of awareness about the vital role played by these ecosystems are the important causes that have contributed to their decline and loss. Identifying, delineating and mapping of wetlands on temporal scale provide an opportunity to monitor the changes, which is important for natural resource management and planning activities (Ramachandra *et al.*, 2002). Bangalore is situated on the divide between the Cauvery Basin and the Ponnaiyar, with approximately 50% of the existing population concentrated within the Cauvery Basin. There are three major drainage outfalls and five small outfalls from the Conurbation Area as shown in Figure 9 and listed in Table 6. The unsanitary conditions created by large volumes of raw, or partially treated, sewage and dumping of large volumes of solid wastes including building debris have seriously impacted the drainage system.

Table 6: Drainage Catchments with valley gradients

Catchment names	Municipalities in Catchment	Typical Valley Gradients		
		Upper	Middle	Lower
Arkavathi & Vrushabhavathi (V) Valley	BMP, Kengeri TMC, Patnagere CMC	1 in 60	1 in 200	1 in 120
Koramangala, (K) Tavarakere (K & C) Valley	BMP, Bommanahalli CMC, Mahadevpura CMC,	1 in 270	1 in 980	1 in 710
Challagatta (C) Valley	Krishnarajpura CMC	1 in 210	1 in 640	1 in 430
Hebbal	BMP, Krishnarajpura CMC, Batarayanpura CMC, Yelahanka CMC	1 in 230	1 in 700	1 in 450
Minor (to TG Halli Reservoir)	BMP, Dasarahalli CMC, Batarayanpura CMC			

Note: Drainage catchments do not coincide with sewerage valleys of the same name

Lakes constructed for agricultural and water supply have suffered in the transition to an urban environment. These lakes provided flood prevention by storing excess flows, slowing down the passage of flood waters and protecting the downstream waterways from erosion and flooding caused by the urbanisation of the catchments. They allowed

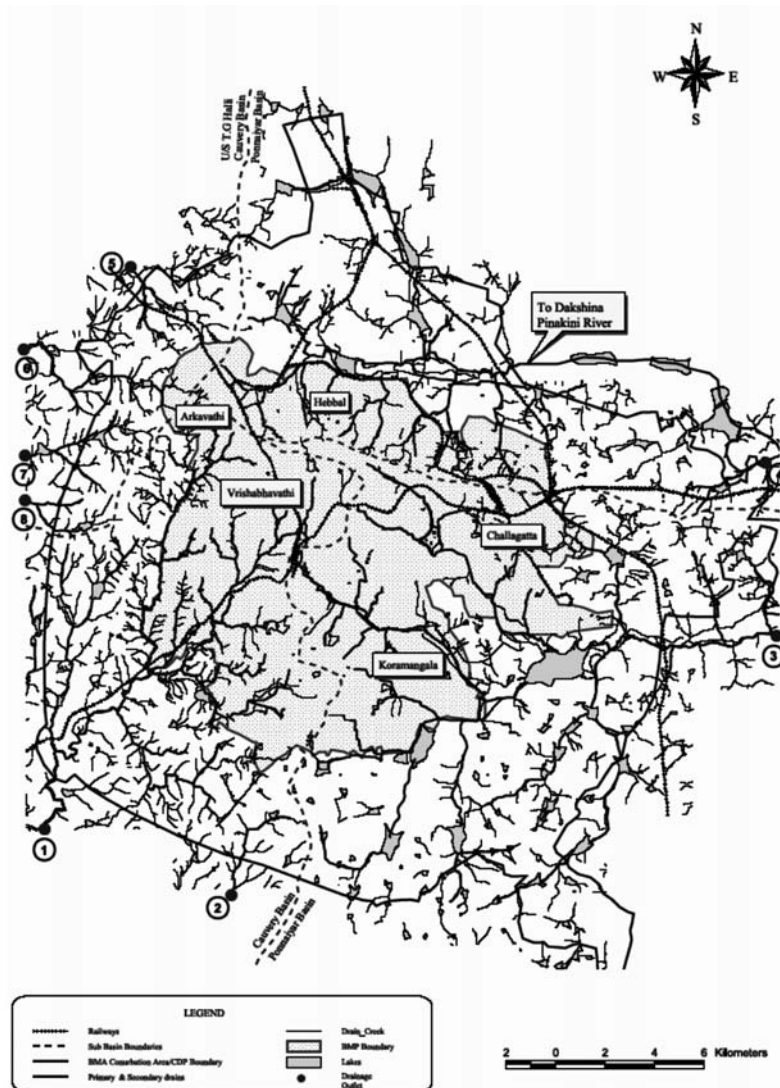


Figure 9: Drainage system in Bangalore (Source: BWSSB)

an opportunity for storm water to percolate to aquifers to supplement groundwater resources (Ramachandra and Uttam Kumar 2008). Now, lakes original function of water supply have been impaired due to dwindling number and size, depleting functions of remaining waterways due to reduced widths, conversion to hard lined drains and to pollution from wastewater discharges, solid wastes and a generally high silt load. Increasing development pressures within the core area have been accompanied by a general neglect by private and public institutions of even the basic flood protection function of drainage system (Ramachandra, 2006 and 2007).

An important function of drainage is to minimise flood damage and as per the estimates by BWSSB for Koramangala Valley the extent of flooding as 8.8 sq. km/year on average (Ashwathnarayana, 1999), would amount to 20 sq. km/year for the core area. Principal factors contributing to the flooding problem in Bangalore are unplanned urbanisation with mushrooming layouts (land development) and buildings with respect to easement provisions and floor level controls (Plate 2.6 and 2.7). Other related contributing factors are inadequate culverting at major and minor roads (Plate 2.8), obstructions by sewerage works in channels, restrictions caused by cross services (including water supply, power and telecom utilities), encroachment of buildings into waterways, dumping of solid wastes and accumulation of sediments in the drains and low design standards (Plate 2.9), combined with use of inappropriate data and analysis techniques. Low-lying and flood-prone lands are listed in Table 6.



Plate 2.6: Flood plain encroachment (Source: BWSSB)



Plate 2.7: Bank erosion and instability due to modification in the floodplain



Plate 2.8: Reduced culvert capacity - dumping of solid waste and supports (Source: BWSSB)



Plate 2.8: Reduced culvert capacity - dumping of solid waste and supports (Source: BWSSB)



Plate 2.8: Stormwater flow hindrance from water pipes, solid waste, reduced culvert capacity



Plate 2.9: Sewer manhole, solid waste and under capacity road crossing

Table 6: Low-lying and flood-prone regions	
Flood prone regions	Ward No.
Koramangala Valley	
City Market Area	30
Sulthan Palya Main Road	28
Jayanagar 3rd Block LIC Colony	
Krishnappa Garden behind Byrasandra Tank D/s	
Wilson Garden Area up to Bannerghatta Road	63
Arekempannahalli Area	61
Jurist Colony	47
Marehahalli Tank	58
Bismillanagar - Agencies	67
Pillappa Gard en - Agencies	63
Ejipura	69
Koramangala Slum	
Sampangiram Nagar	77
Wipro Junction	

Table 6: Low-lying and flood-prone regions

Hebbal Valley	
Brindavananagar below Matthikere Tank Market	2
KEB Compound Maththikere	4
Tannerana Halli	2
Anandanagara	96
Ring Road	96
New - Bangalore Layout	94 & 95
Challaghatta Valley	
Miller Tank, Chinnappa Garden	
Shivajinagar, Munireddy Palya	
Saraswathipuram - Jogu Palya	
K R Garden	
Vrushabhavathi	
Gubbanna Layout	22
Shankarappa Garden Gopalapura	25
Cholurpalya	32 & 33
Bapujinagar	42
Minerva Mill	33
Dhovi Colony, near Sane Guruvanahalli Tank	19
Kamakshipalya Tank Slum Area	18
Binny Mill Tank Area	30
Markandayyanagar (near Binny Mill)	31
Sanjaya Gandhi Slum Area	41
Rudrappa Garden	45

Land-Use Changes

Land use is the use of land by humans, usually with emphasis on the functional role of land such as land under buildings, plantation, pastures, etc. Flows in the catchment were indirectly estimated by the land use area, runoff coefficient and precipitation. Land use pattern in the catchment has direct implications on hydrological yield. The yield of a catchment area is the net quantity of water available for storage, after all losses, for the purpose of water resource utilization and planning. Runoff is the balance of rainwater, which flows or runs over the natural ground surface after losses by evaporation, interception and infiltration [Ramachandra and Uttam Kumar 2008]. The runoff from rainfall was estimated by rational method that is used to obtain the yield of a catchment area by assuming a suitable runoff coefficient.

Land use analysis was done using temporal remote sensing data - Landsat data of 1973 (of 79 m spatial resolution), 1992 and 2000 (30 m), IRS LISS-3 data of 1999 and 2006 (23.5 m) and MODIS data of 2002 and 2007 (with 250 m to 500 m spatial resolution).

The analysis was done with supervised pattern classifiers based on maximum likelihood (ML) estimation followed by a Bayesian statistical approach. This technique quantifies the tradeoffs between various classification decisions using probability and costs that accompany such decisions. It makes assumptions that the decision problem is posed in probabilistic terms, and that all of the relevant probability values are known with a number of design samples or training data collected from field that are particular representatives of the patterns to be classified. The mean and covariance are computed using maximum likelihood estimation with the best estimates that maximizes the probability of the pixels falling into one of the classes.

Data: Survey of India (SOI) toposheets of 1:50000 and 1:250000 scales were used to generate base layers of taluk boundaries, city boundary, drainage networks, and water bodies. Field data were collected with a handheld GPS. Remote sensing data (spatial and spectral resolutions are listed in table 1) used for the study are:

- Landsat MSS of 1973 [downloaded from <http://glcf.umiacs.umd.edu/data/>]
- Landsat TM of 1992 [downloaded from <http://glcf.umiacs.umd.edu/data/>]
- Landsat ETM+ of 2000 [downloaded from <http://glcf.umiacs.umd.edu/data/>]
- IRS (Indian Remote Sensing) LISS (Linear Imaging Self Scanner)-III of 1999 and 2006
- MODIS (Moderate Resolution Imaging Spectroradiometer) Surface Reflectance 7 bands product [downloaded from <http://edcdaac.usgs.gov/main.asp>] of 2002 and 2007
- MODIS Land Surface Temperature/Emissivity 8-Day L3 Global and Daily L3 Global (V004 and V005 products) [downloaded from <http://lpdaac.usgs.gov/modis/dataproducts.asp#mod11>]
- SRTM (Shuttle Radar Topography Mission) elevation data of 90 m resolution [downloaded from <http://glcf.umiacs.umd.edu/data/>] and
- Google Earth image (<http://earth.google.com>) served in pre and post classification process and validation of the results.

Supervised classification was performed using Bayesian classifier and was verified with field knowledge, visual interpretation and Google Earth image. The supervised classified images of 1973, 1992, 1999, 2000, 2002, 2006 and 2007 with an overall accuracy of 72%, 75%, 71%, 77%, 60%, 73% and 55% were obtained by using the open source programs (i.gensig, i.class and i.maxlik) of Geographic Resources Analysis Support System ([http://wgbis.ces.iisc.ernet.in/](http://wgbis.ces.iisc.ernet.in/grass) grass) as displayed in Figure 11.1. The class

statistics is given in table 6.1. The implementation of the classifier on Landsat, IRS and MODIS image helped in the digital data exploratory analysis as were also verified from field visits in July, 2007 and Google Earth image.

Table 6.1: Land use in Greater Bangalore					
Class Year		Built up	Vegetation	Water Bodies	Others
1973	Ha	5448	46639	2324	13903
	%	7.97	68.27	3.40	20.35
1992	Ha	18650	31579	1790	16303
	%	27.30	46.22	2.60	23.86
1999	Ha	23532	31421	1574	11794
	%	34.44	45.99	2.30	17.26
2000	Ha	24163	31272	1542	11346
	%	35.37	45.77	2.26	16.61
2002	Ha	26992	28959	1218	11153
	%	39.51	42.39	1.80	16.32
2006	Ha	29535	19696	1073	18017
	%	43.23	28.83	1.57	26.37
2007	Ha	30876	17298	1005	19143
	%	45.19	25.32	1.47	28.01

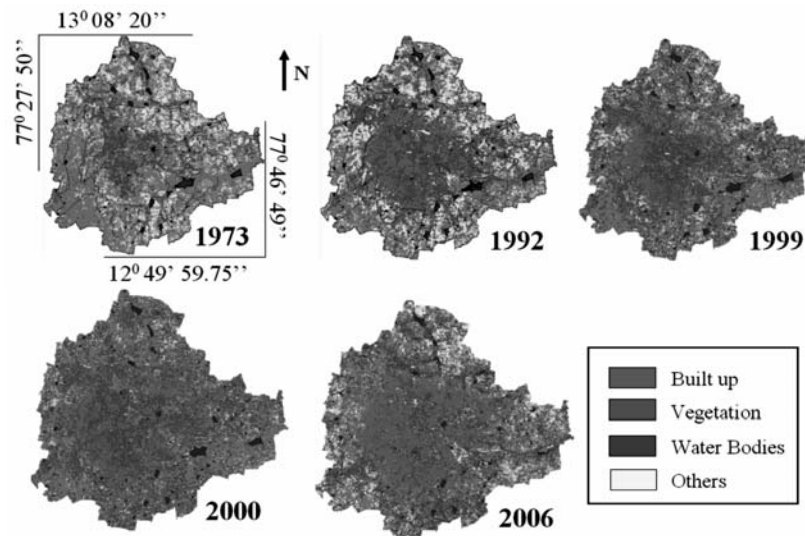


Figure 11.1: Temporal land use changes in Greater Bangalore

From the classified raster data, urban class was extracted and converted to vector representation for computation of precise area in hectares. There has been a 466% increase in built up area from 1973 to 2007 as evident from temporal analysis leading to a sharp decline of 61% area in water bodies in Greater Bangalore mostly attributing to intense urbanisation process. Figure 11.2 shows Greater Bangalore with 265 water bodies (in 1972). The rapid development of urban sprawl has many potentially detrimental effects including the loss of valuable agricultural and eco-sensitive (e.g. wetlands, forests) lands, enhanced energy consumption and greenhouse gas emissions from increasing private vehicle use. Vegetation has decreased by 32% from 1973 to 1992, by 38% from 1992 to 2002 and by 63% from 2002 to 2007. Disappearance of water bodies or sharp decline in the number of waterbodies in Bangalore is mainly due to intense urbanisation and urban sprawl. Many lakes were unauthorised encroached for illegal buildings (54%). Field survey (during July-August 2007) shows that nearly 66% of lakes are sewage fed, 14% surrounded by slums and 72% showed loss of catchment area. Also, lake catchments were used as dumping yards for either municipal solid waste or building debris. The surrounding of these lakes have illegal constructions of buildings and most of the times, slum dwellers occupy the adjoining areas. At many sites, water is used for washing and household activities and even fishing was observed at one of these sites. Multi-storied buildings have come up on some lake beds that have totally intervene the natural catchment flow leading to sharp decline and deteriorating quality of waterbodies.

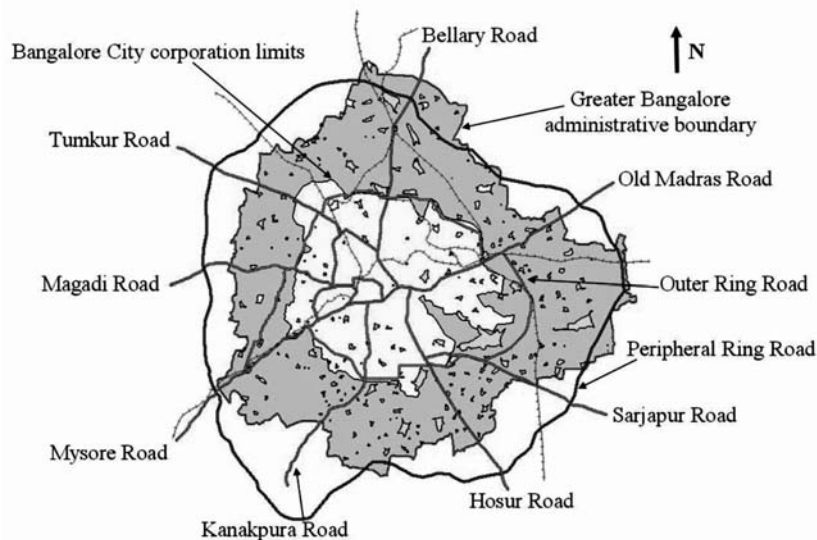


Figure 11.2: Greater Bangalore with 265 water bodies.

Figure 11.3 provides the distribution of wetlands in 1973, 1992, 2002 and 2007 based on the respective years' remote sensing data. The analysis revealed that there were 51 wetlands (321 ha) in 1973, 38 (207 ha) in 1992, 25 (135 ha) in 2002 and dropped down to 17 with an extent of 87 ha in 2007 in the Bangalore city limits.

There were 159 waterbodies spread in an area of 2003 ha in 1973, that reduced to 147 (1582 ha) in 1992, which further declined to 107 (1083 ha) in 2002 and finally there are only 93 waterbodies (both small and medium size) with an area of 918 ha in the Greater Bangalore region. Waterbodies in northern part of greater Bangalore are in a considerably poor state compared to the wetlands in southern greater Bangalore. Validation of the classified data was done through field visits during July 2007, which indicate the accuracy of 91%. The error of omission was mainly due to cover of water hyacinth (aquatic macrophytes) in the waterbodies due to which the energy was reflected in IR bands than getting absorbed. 54 waterbodies were sampled through field visits while the remaining waterbodies were verified using online Google Earth (<http://earth.google.com>).

Temporal analyses indicate the decline of 34.48% during 1973 to 1992, 56.90% during 1973-2002 and 70.69% of waterbodies during 1973-2007 in the erstwhile Bangalore city limits. Similar analyses done for Greater Bangalore (i.e Bangalore city with surrounding 8 municipalities) indicate the decline of 32.47% during 1973 to 1992, 53.76% during 1973-2002 and 60.83% during 1973-2007 (Table 4). This is correlated with the increase in built up area from the concentrated growth model focusing on Bangalore, adopted by the state machinery, affecting severely open spaces and in particular waterbodies. Some of the lakes have been rested by the city corporation and the concerned authorities in recent times [13].

Urbanisation and the consequent loss of lakes has led to decrease in catchment yield, water storage capacity, wetland area, number of migratory birds, flora and fauna diversity and ground water table. Studies in selected lake catchments in Bangalore reveal the decrease in depth of the ground water table from 10-12 m to 100-200 m in 20 years due to the disappearance of wetlands.

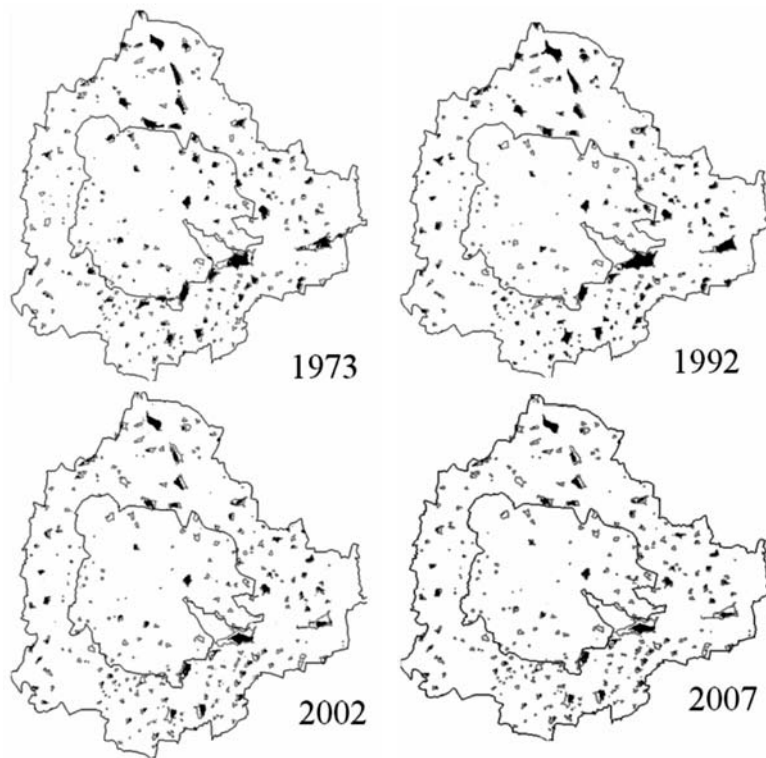


Figure 11.3: Unsupervised learning to extract waterbodies from NIR bands. Waterbodies are represented in blue and the vector layer of waterbodies generated from SOI Toposheet is overlaid (in red colour) that exactly fits on the exiting waterbodies. The inner boundary (in black) is the Bangalore city limit and the outer boundary represents the spatial extent of Greater Bangalore.

The dramatic increase in builtup area could be attributed to the urban sprawl in the peri urban areas of the city. The Shannon's entropy was computed to detect the urban sprawl phenomenon. Shannon's entropy computed for Bangalore city, Peri-urban and outskirts (hence $n = 3$), together comprising Greater Bangalore for 1973, 1992, 2000 and 2006 are listed in Table 6.2. The entropy values obtained for 2000 and 2006, (1.0325 and 1.0782) are closer to the upper limit of $\log n$, i.e. 1.0986, showing the higher degree of dispersion of built-up in the city. The urbanisation process increased in 2000 and 2006, indicating higher entropy value as the distribution of built-up during 2006 was more dispersed than in 1973 or 1992.

Table 6.2: Shannon's entropy for Greater Bangalore

Year	1973	1992	2000	2006
Entropy	0.9007	0.9023	1.0325	1.0782
ln(n)	1.0986			

Consequences of urbanisation and urban sprawl: Urbanisation and urban sprawl have posed serious challenges to the decision makers in the city planning and management process involving plethora of issues like infrastructure development, traffic congestion, and basic amenities (electricity, water, and sanitation), etc. [Ramachandra and Uttam Kumar 2004, 2007]. Apart from this, major implications of urbanisation are:

- **Floods:** Common consequences of urban development are increased peak discharge and frequency of floods as land is converted from fields or woodlands to roads and parking lots, it loses its ability to absorb rainfall. Conversion of water bodies to residential layouts has compounded the problem by removing the interconnectivities in an undulating terrain.
- **Heat island:** Surface and atmospheric temperatures are increased by anthropogenic heat discharge due to energy consumption, increased land surface coverage by artificial materials having high heat capacities and conductivities, and the associated decreases in vegetation and water pervious surfaces, which reduce surface temperature through evapotranspiration.

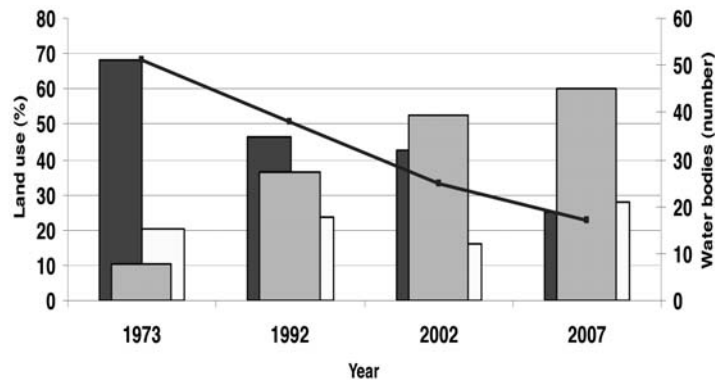


Figure 11.4: Temporal changes in built up and its impact on vegetation and water bodies

- **Loss of aquatic ecosystems:** Urbanisation has telling influences on the natural resources evident from the sharp decline in number of water bodies and also from depleting groundwater table. Figure 11.4 illustrates the loss of aquatic ecosystems (70% decline during 1973-2007 in the Bangalore city limits) and vegetation with the increase in built up area (466% during 1973-2007).

Floods in the City

Purpose of Assessment

Burgeoning human population coupled with the increased urban concentration has escalated both the frequency and severity of disasters like floods, etc. With the tropical climate and unstable land forms, coupled with land use changes, unplanned growth proliferation non-engineered constructions make the disaster-prone areas mere vulnerable. In this regard basic policy statements as part of comprehensive development plan of a region need to address:

- Protect life and health
- Minimising property losses
- Enhance floodplain use
- Ensure a functional drainage systems
- Encourage aesthetics
- Curb large scale land use changes in the immediate vicinity of waterbody catchment
- Guide development

This entails appropriate strategies for natural resources planning, development and management by adopting an integrated approach for a hydrological unit such as lake catchment, incorporating quantity, quality and environmental considerations (Ramachandra, 2007). Development projects and investment proposal has to be formulated and considered within the framework of lake catchment, river or sub-basin plan so that the best possible combination of options can be obtained for poverty alleviation, increasing incomes and productivity, equity, reduced vulnerability to natural and economic risks and costs (Ramachandra, *et al.*, 2007). Solutions to water allocation and planning issues will be found adopting a demand management approach.

Techniques adopted for assessment include data collection (primary and secondary data), analysis (remote sensing and collateral data) and interpretation.

Incidence Description

Unplanned urbanisation has drastically altered the drainage characteristics of natural catchments, or drainage areas, by increasing the volume and rate of surface runoff. Drainage systems are unable to cope with the increased volume of water and are often encountered with the blockage due to indiscriminate disposal of solid wastes. Encroachment of wetlands, floodplains, etc. Obstructs floodways causing loss of natural flood storage. Damages from urban flooding can be grouped into two categories:

- Direct damage—typically material damage caused by water or flowing water.
- Indirect damage—social consequences that are negative long term effects of a more psychological character, like decrease of property values in frequently flooded areas and delayed economical development, for e.g. traffic disruptions, administrative and labour costs, production losses, spreading of diseases, etc.

Table 7: Rainfall during 1995-2005, Bangalore

Wettest day		Rainfall in May	
Year	Day	mm	mm
2005	28-May	61.2	150.1
2004	4-May	42.9	207.9
2003	14-May	0.8	1.3
2002	26-May	95	183.5
2001	4-May	31.6	60.2
2000	6-May	19.2	56.6
1999	15-May	46.9	200.6
1998	12-May	52.2	110.3
1997	3-May	28.1	77
1996	30-May	33.6	117.6
1995	21-May	39.4	147.7

Source: IMD

Rainfall pattern in Bangalore: Monthly and Yearly rainfall record

Month	Days	Mm	Year	Rainy days	Rainfall (mm)	liters/100sq.m
Jan	0.2	2.70	1990	42	509.40	40,752
Feb	0.5	7.20	1991	65	1338.50	1,07,080
Mar	0.4	4.40	1992	56	844.60	67,568
Apr	3.0	46.30	1993	65	1059.70	84,776
May	7.0	119.60	1994	45	587.10	46,968
Jun	6.4	80.80	1995	61	1072.20	85,776
Jul	8.3	110.20	1996	64	1173.30	93,864
Aug	10.0	137.00	1997	52	717.40	57,392
Sep	9.3	194.80	1998	68	1431.80	1,14,544
Oct	9.0	180.40	1999	52	1009.40	80,720
Nov	4.0	64.50	Average	57	974.34 mm	77,947
Dec	1.7	22.10				
Total	59.8	970.00				

Urban flooding creates considerable infrastructure problems and huge economic losses in terms of production, as well as significant damage to property and goods. Flooding in urban areas causes large damage at buildings and other public and private infrastructure. Besides, street flooding can limit or completely hinder the functioning of traffic systems and has indirect consequences such as loss of business and opportunity. The expected total damage; direct and indirect monetary damage costs as well as possible social consequences is related to the physical properties of the flood, i.e. the water level above ground level, the extend of flooding in terms of water volume escaping from or not being entering the drainage system, and the duration of flooding. With sloped surfaces even the flow velocity on the surface might have an impact on potential flood damage. Precipitation, intensity and the duration of time are the key elements that decide flooding. Sometimes even 8 cm to 10 cm of rainfall in a short span of time have resulted in flooding, and if it occurred in a matter of one or two days, the water seeps into the soil, in the case of mixed land use (urban, vegetation). Even a 30 mm rainfall in a matter of 30 minutes could cause flooding, especially in the low-lying areas, due to

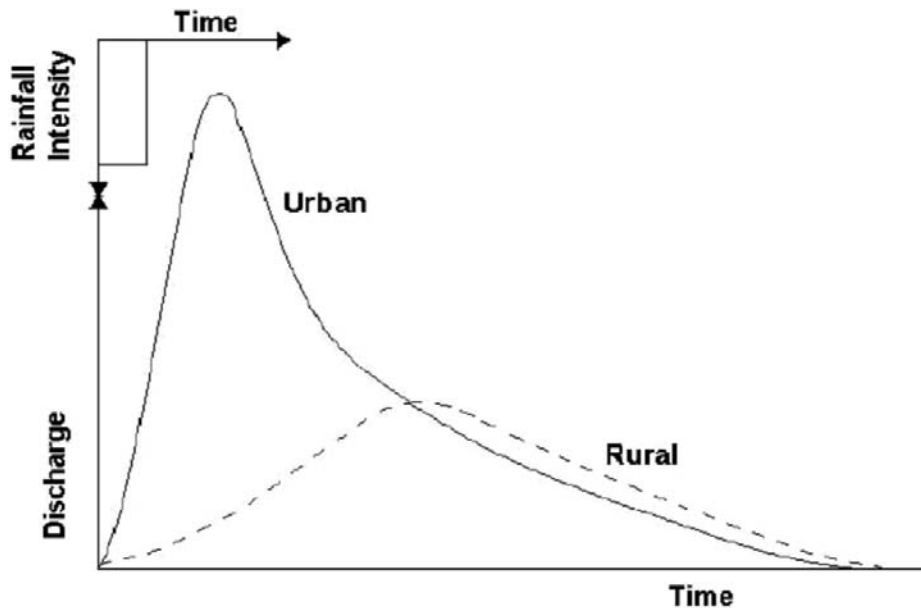


Figure 12.1: Flood Hydrographs for Urbanized and Natural Drainage Basins

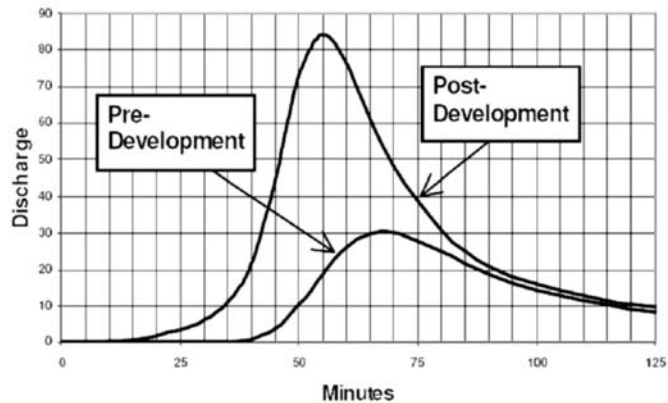


Figure 12.2: Runoff Hydrograph under Pre- and Post-Development conditions

intense urbanisation. Frequent thunder showers accompanied by squall and hail being the characteristic of the month of May, resulting in the uprooting of trees.

The highest rainfall recorded on a single day has been 10 cm during the month of May in 2002 (Table 7.1). The closest in record to this was 9 cm recorded in 1991 on a single day. Earlier, 1999 witnessed 200.6 mm rainfall and the lowest rainfall recorded has been 1.3 mm in 2003. The heaviest rainfall in 24 hours has been 153.9 on May 6 1909. As the development of land use in urban areas, less water can be absorbed by the soil and the volume of urban stormwater is increasing. This escalating volume of urban runoff not only increases pollution, it elevates the risk of flooding. The amount of urban runoff is largely a factor of rainfall and the amount of paved area. As paved area increases – for

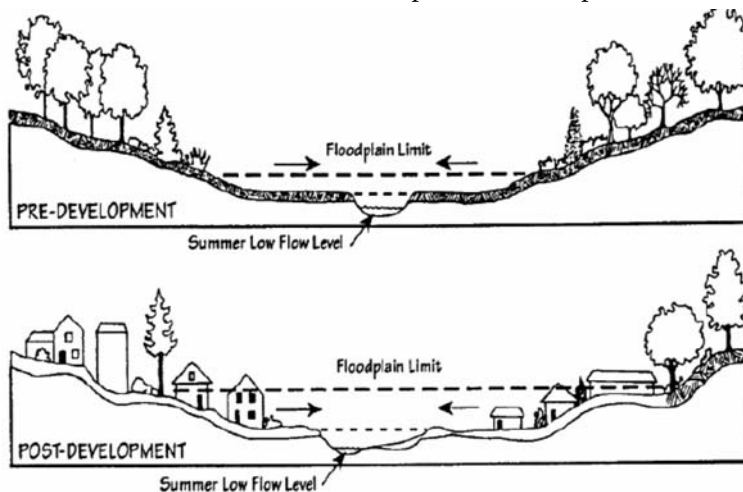


Figure 12.3: Change in Floodplain Elevations

example, due to vegetation clearing, new housing or industrial developments, urban infill, paving driveways, patios, new roads etc., so does the amount of runoff.

Increasing urbanization has led to significant changes in the natural systems. These changes include alterations in the hydrologic flow regime as well as shifts in the chemical and biological makeup of stormwater runoff from these developing areas. As an area is developed, the natural ability of the catchment to withstand natural hydrologic variability is removed. Infiltration capacity is decreased due to the increase in impervious surface and disrupted native soils and vegetation. Natural retention and detention capabilities of a catchment are removed through channelization of natural waterways and the installation of formal drainage systems such as pipes and gutters (Vijay Kulkarni and Ramachandra, 2006). Anthropogenic activity also introduces chemical and biological constituents to the catchment.

Increased peak discharges for a developed watershed can be two to five times higher than those for a watershed prior to development (Figure 12.1). The changes in the rates and amounts of runoff from developed watersheds directly affect the morphology, or physical shape and character, of creeks and streams (Figure 12.2). Some of the impacts due to urban development include: Stream widening and bank erosion, stream down cutting, changes in the channel bed due to sedimentation, increase in the floodplain elevation. Urban floods differ from those in natural basins in the shape of flood hydrographs (Figure 12.1), peak magnitudes relative to the contributing area, and times of occurrence during the year. The imperviousness of urban areas along with the greater hydraulic efficiency of urban conveyance elements cause increased peak stream flows but also more rapid stream response. Summer floods resulting from high intensity thunderstorms are more common in urban areas. Infiltration and evapotranspiration are much reduced at this time of the year under developed conditions (Prasad, et al., 2002, Ramachandra, 2002, WHGM, 2003).

Some of the impacts due to urban development include: reclamation of lakes (Plate 4.1), stream widening and bank erosion, stream down cutting, changes in the channel bed due to sedimentation, increase in the floodplain elevation (Figure 12.3). Urban floods differ from those in natural basins in the shape of flood hydrographs (Figure 12.1), peak magnitudes relative to the contributing area, and times of occurrence during the year. The imperviousness of urban areas along with the greater hydraulic efficiency of urban conveyance elements cause increased peak stream flows but also more rapid stream response (WHGM, 2003). Summer floods resulting from high intensity thunderstorms are more common in urban areas. Infiltration and evapotranspiration are much reduced at this time of the year under developed conditions.

Thus, flooding is a consequence of the increase in impervious area due to land use changes in the catchment from open space to impervious surfaces with the high-density urban developments. This is coupled with lack of drainage upgrade works with the changes in enhanced run-offs, the encroachment and filling in the floodplain on the waterways, obstruction by the sewer pipes and manholes and relevant structures, deposits of building materials and solid wastes with subsequent blockage of the system and also flow restrictions from under capacity road crossings (bridge and culverts).

The lack of planning and enforcement has resulted in significant narrowing of the waterways and filling in of the floodplain by illegal developments. This has subsequently caused flooding to other properties that have not previously been flooded, new properties in the flood plain built below the high flood marks (designated flood levels), these being frequently flooded and restrictions of options for future flood mitigation including widening of waterways.

Pre-Incidence Scenario

**Table 7.2: Rainfall during May-November for forested and urban area
(40% impervious)**

Distribution of May to November Rainfall for Forested and Urbanized Areas Item	Forested Areas		Urban Areas with 40% Impervious Cover	
	Depth (mm)	% of Total Depth	Depth (mm)	% of Total Depth
May to November Rainfall	515	100.0	515	100
Interception Storage and Depression Storage on Impervious Areas	342	66.5	235	45
Infiltration	155	30.0	100	20
Runoff	18	3.5	180	35

Urban floods are linked to the total lack of attention to the nature of region's hydrological system. Despite the knowledge of occurrence of heavy downpours and its frequency, the natural drainage channels are not maintained, catchment area of lakes and lakes have been allowed to be encroached by land mafia in connivance with the government machinery. This is something our ancestors knew but our current urban planners and politicians don't worry about such mundane things (<http://www.rainwaterharvesting.org/>

catchwater/oct2000/newslet9_1.htm,http://www.downtoearth.org.in/editor.asp?foldername=20000930&filename=Editor&sec_id=2&sid=1).

Urban flooding is not a new phenomenon. Increasingly, more and more cities and towns face waterlogged streets. Post 2000 have witnessed, even relatively small downpours are enough to clog up drains, fill up streets and disrupt life and the study proved that unchecked construction of big buildings, loss of open spaces, and clogged drains were the cause.. Meanwhile, cities continue to face water scarcity and the water tanker business continues to grow. Bangalore is just one example of bad water management practices. Years of siltation of tanks have reduced their water storage capacity. Encroachments of nalas, lakes and other waterbodies, choking of streams and stormwater drains have taken their toll. There is a need for urban areas to improve water management. Urban water harvesting offers a solution to deal with meeting water demand as well as reducing the intensity of urban flooding. Thus, the urbanization process and the hydraulic insufficiency of drainage systems are two of the most common causes of urban flooding.

Development and redevelopment of the district, by nature increases the amount of imperviousness in the surrounding environment. This increased imperviousness translates into loss of natural areas, more sources for pollution in runoff, and heightened flooding risks. In recent decades, stormwater runoff has emerged as an issue of major concern. Stormwater affects local waterways both in terms of the volume of runoff that is generated, and the nature of the pollutants that may be conveyed. Allowing stormwater to infiltrate in urban residential areas is one of the major ways for urban floods.

A major consequence of the increase in impervious area which accompanies urbanization is an increase in direct runoff and a corresponding decrease in infiltration. Table 7.2 illustrates the changes in hydrological components that result from developing a forested area. Urbanization also results in decreased evapotranspiration. The net effect of conventional development practices on an urban stream is a dramatic change in the hydrologic regime of the stream.

The downstream urban flooding problem has become acute during the past thirty years as communities have grown and as curbed roadways (paved channels) have been installed in both new suburban areas and throughout older areas that formerly provided runoff-retarding storage in roadside swales or ditches. Amelioration of the unfortunate results of past urbanization requires very large investments to construct additional flood control works. Where flood control is infeasible, the flooding hazard reduces property values and may lead to abandonment, which is unacceptable.

Response & Loss Summary

The survey carried out by BWSSB in Bangalore reveals that few households from the peri-urban and the Green Belt areas reported that their houses had been flooded in the recent past, suggesting that high density of houses and unplanned urbanisation have contributed to the problem of improper drainage in the Corporation Area. Major highlights of the survey are:

- 7% of households reported that they faced instances of flooding;
- 10% of households of lower socio-economic status reported that they had faced flooding in the past decade – instances of flooding had been more common in the central part of the city;
- Of the households that had experienced flooding, 72% reported such occurrences in the last one year, 15% had experienced flooding in the year 1999, 7% during the period 1995 to 1998, while 2% reported that they had experienced flooding prior to 1995;
- Of the households that had experienced flooding, a majority said that the effects had lasted for one to three days, while 3% said they had extended beyond a week;



**BANGALORE CITY BUS STAND,
ONCE DHARMAMBUDHI TANK**



**THE KGA GOLF COURSE STANDS ON WHAT
WAS ONCE THE CHALLAGHATTA TANK**



**THE KARAMANGALA TANK IS TODAY A
SPORTS COMPLEX**



**A SPORTS STADIUM TODAY.,
THIS WAS THE SAMPANGI TANK EARLIER**

Plates 4.1: Conversion of lakes in Bangalore Similar past incidences

[Source: http://www.thisismyindia.com/pictures_of_india/bangalore-pictures.html]



GARVIBAVI PALYA NEAR HOSUR RADO



HOSUR ROAD FLOODED IN BANGALORE



HOUSE IN JP NAGAR BANGALORE



TRAFFIC JAM TO HEAVY RAINS



**SUBWAY BETWEEN MAGESTIC AND
RAILWAY STATION**



RISING WATER LEVEL AND VEHICLES

Plate 4.2: Rain havoc in Bangalore during 2005 and 2007

- Two thirds of the households ascribed the reasons for flooding to blockages in the sewerage system, 12% to ingress of rainwater into the house, while 11% said that it had been caused by a blocked drain or gutter;
- Lower income households and those living in the slums were more vulnerable to flooding caused by blocked drains; and

All households reported damage to assets and loss of workdays on account of such flooding. Majority of these affected communities are engaged in daily wage labour or small-scale retail activities. Flooding and the resultant disruption of mobility have a direct impact on the incomes of the households. Their ability to cope with such disturbances is much lower than that of other socio-economic groups who have larger social and economic security nets to fall back upon. Women, children and the elderly are most vulnerable to hazards of poor environmental sanitation, as they spend more time in the house and its vicinity than adult men who have greater mobility and often spend little time within the house or the neighbourhood.

In addition to this, newspaper reports in response to rain havoc (one such example on May 28, 2005, Plate 4.2)

- A woman and a man were killed (HTUhttp://www.thisismyindia.com/UTHpictures_of_india/bangalore-pictures.html)
- Heavy water logging was reported from 35 areas in southern and eastern parts of the city
- The Fire and Emergency Services had to press in 20 vehicles to clear uprooted trees and pump out water in flooded areas
- 434 electric poles were uprooted. BESCOM suffered a loss of Rs. 4.8 crore
- A number of trees were uprooted, damaging a BMTC bus, a car and three other vehicles

Litter, building debris, sediments and solid waste are the main causes of blockages of the drainage system and subsequent flooding. Therefore, minimising flooding and the establishment of clean healthy waterways are some of the many benefits which can be achieved through appropriate solid waste and catchment management practices by reducing pollution from the sources. BWSSB's Sewer Division has, over the last two years, carried out de-silting of the 2000 mm diameter outfall sewer including sewer section through Ejipura – where much of the silting up was caused by local residents breaking into the sewer to release flood water.

Various Factors Responsible for the Floods

Reclamation of lakes for various developmental activities (Plate 4.1) has resulted in the loss of interconnectivity in Bangalore district leading to higher instances of floods even during the normal rainfall. Analyses of Bellandur and Ulsoor drainage network (Figure 13.1)

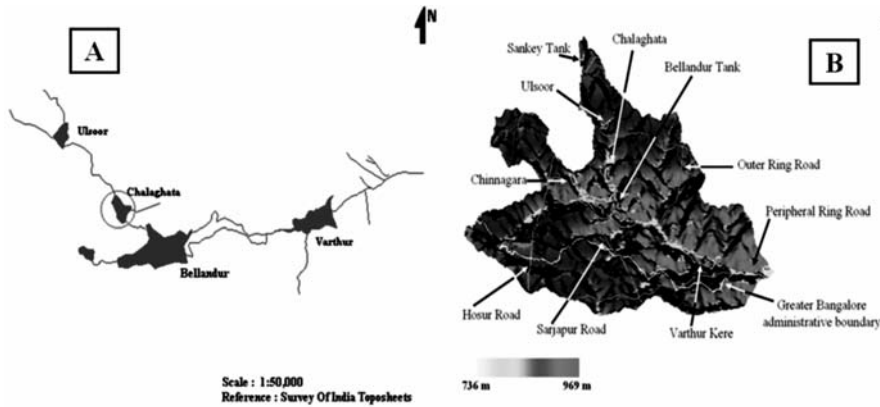


Figure 13.1: Ulsoor-Bellandur-Varthur (a) drainage network (b) lakes overlaid on 10 m DEM showing their missing interconnectivity

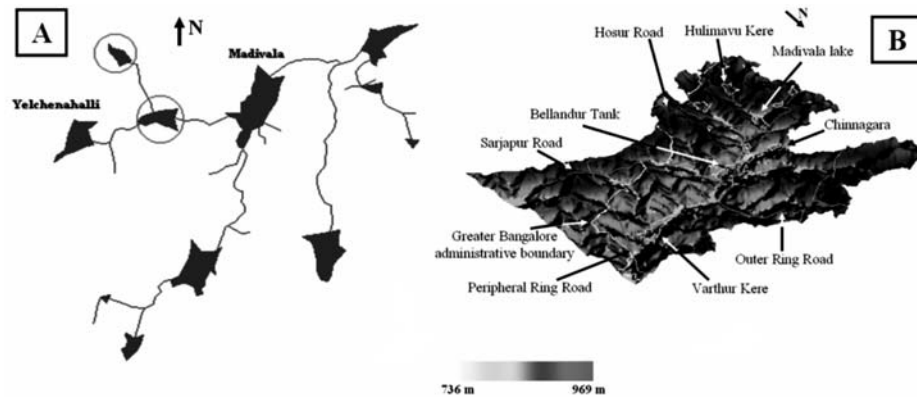


Figure 13.2: Madivala-Bellandur-Varthur (a) drainage network (b) lakes overlaid on 10 m DEM showing their missing interconnectivity

showed that the network is lost due to conversion of Chelgatta tank into a golf course. Similarly the drainage network between Madivala and Bellandur revealed of encroachment and conversion that has resulted in the loss of connectivity between Yelchenahalli kere and Madivala (Figure 13.2). Figure 14.1, 14.2 and 14.3 provides the line diagrams of drainage systems of three valleys namely Challaghatta , Ulsoor Valley and Hebbal Valley

Increased peak discharge and higher frequency of floods are the consequences of urbanisation. As land is converted from fields to built up, it loses its ability to absorb rainfall. Urbanisation has increased runoff 2 to 6 times over what would occur on natural terrain in some pockets of Bangalore. During periods of urban flooding, streets become swift moving rivers, while low lying residential areas and basements become death traps as they fill with water. Conversion of water bodies to residential layouts has further exaggerated the problem.

Flooding in urban areas causes large damage at buildings and other public and private infrastructure (evident during 1997, 2002 and 2007). Besides, street flooding can limit or completely hinder the functioning of traffic systems and has indirect consequences such as loss of business and opportunity. The expected total damage; direct and indirect monetary damage costs as well as possible social consequences is related to the physical properties of the flood, i.e. the water level above ground level, the extent of flooding in terms of water volume escaping from or not being entering the drainage system, and the duration of flooding.

Ulsoor–Belandur catchment: This catchment has 6 lakes – Sankey, Ulsoor, Chalthata, Chinnagara and Varthur and was classified into three major land use types – built up, vegetation and others (comprising open land, waste land etc). The total rainfall yield in this catchment is 240 MmP3P, percolated water is 90 MmP3P and water overflow is 150 MmP3P. The SRTM DEM data were resampled to 10 m resolution and the volume of each lake was computed assuming the depth to be 1 m and the mean annual rainfall to be 850 mm. The total volume of all the 6 lakes in this catchment is 73 MmP3P. Hence there is surplus overland flow of 77 MmP3P, which cannot flow to downstream due to disruption of natural drainage (removal of lakes and blockage of storm water drains) resulting in flooding (even during normal rainfall).

Madivala–Varthur catchment: Similar analysis was done for Madivala catchment which has 14 lakes – Venkatapura, Yellakunte, Bandepalya, Begur Doddakere, Madivala, Hulimavu, Marenahalli, Govindanaikana kere, Tank north of Doresanipalya, Gittigere and Vaddarpalya. The total rainfall yield is 247 MmP3P, percolated water is 97 MmP3P and the remaining 150 MmP3P water flows as overland flow and storage in lakes. The total volumes of all the lakes considering 1 m depth is 110 MmP3 Presulting in the excess of 40 MmP3P from the catchment leading to artificial floods. In addition to rainfall, Belandur-Varthur watershed receives untreated municipal sewage to the order of 500MLD.

Disappearance of waterbodies or sharp decline in the number of waterbodies in Bangalore is mainly due to intense urbanisation and urban sprawl. Many lakes were encroached for illegal buildings (54%). Field survey (during July-August 2007) shows that

nearly 66 % of lakes are sewage fed, 14 % surrounded by slums and 72% showed loss of catchment area. Also, lake catchments were used as dumping yards for either municipal solid waste or building debris. The surrounding of these lakes have illegal constructions of

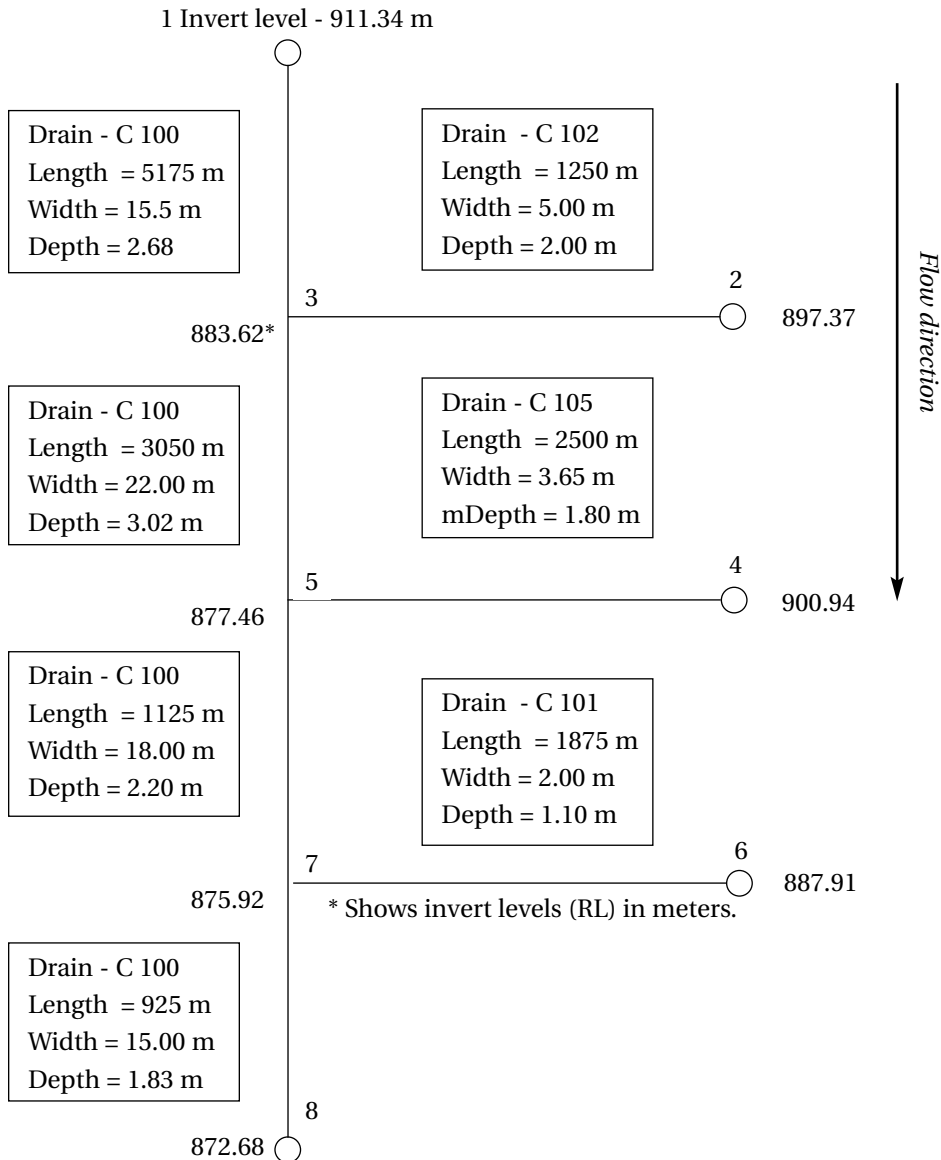


Figure 14.1. Line-diagram showing the Drainage System of Challaghatta Valley

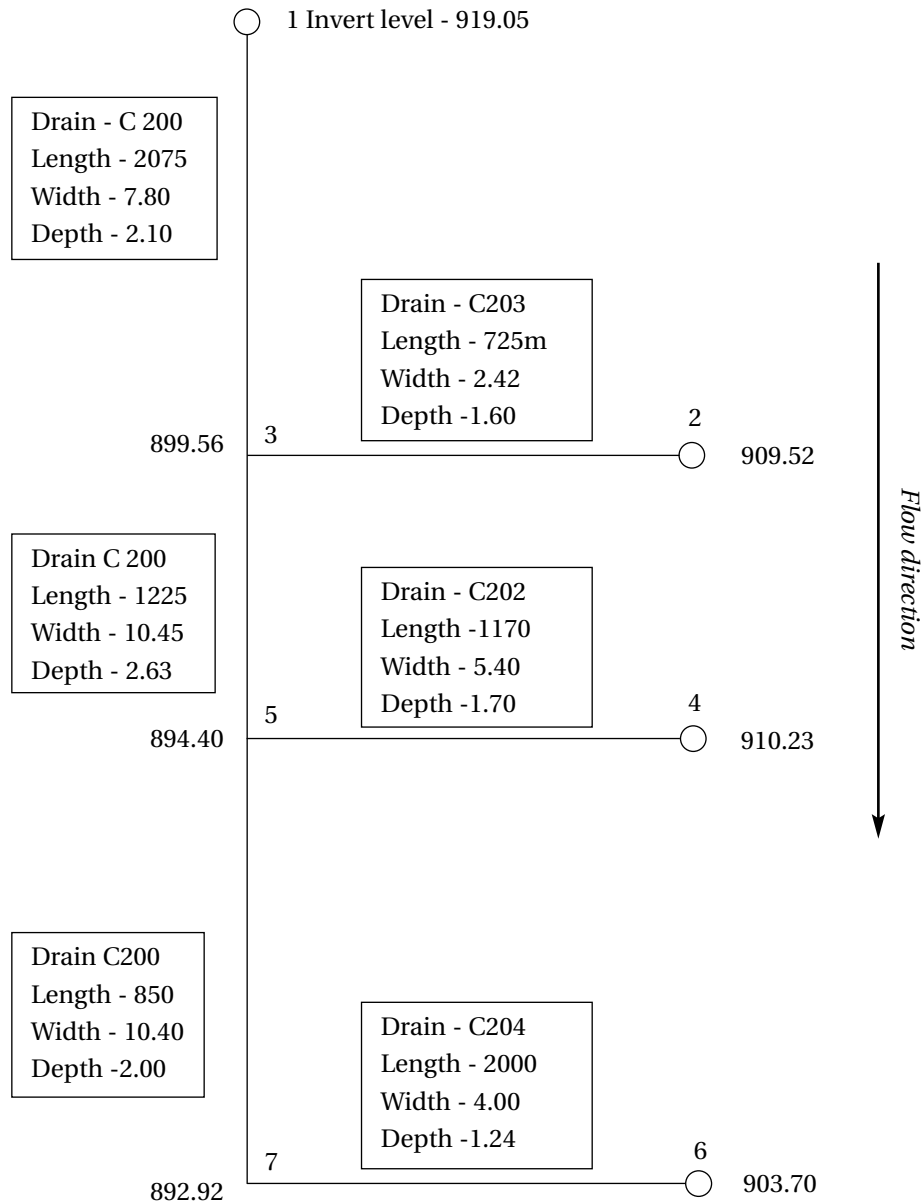


Figure 14.2: Line diagram showing the drainage system of Ulsoor Valley

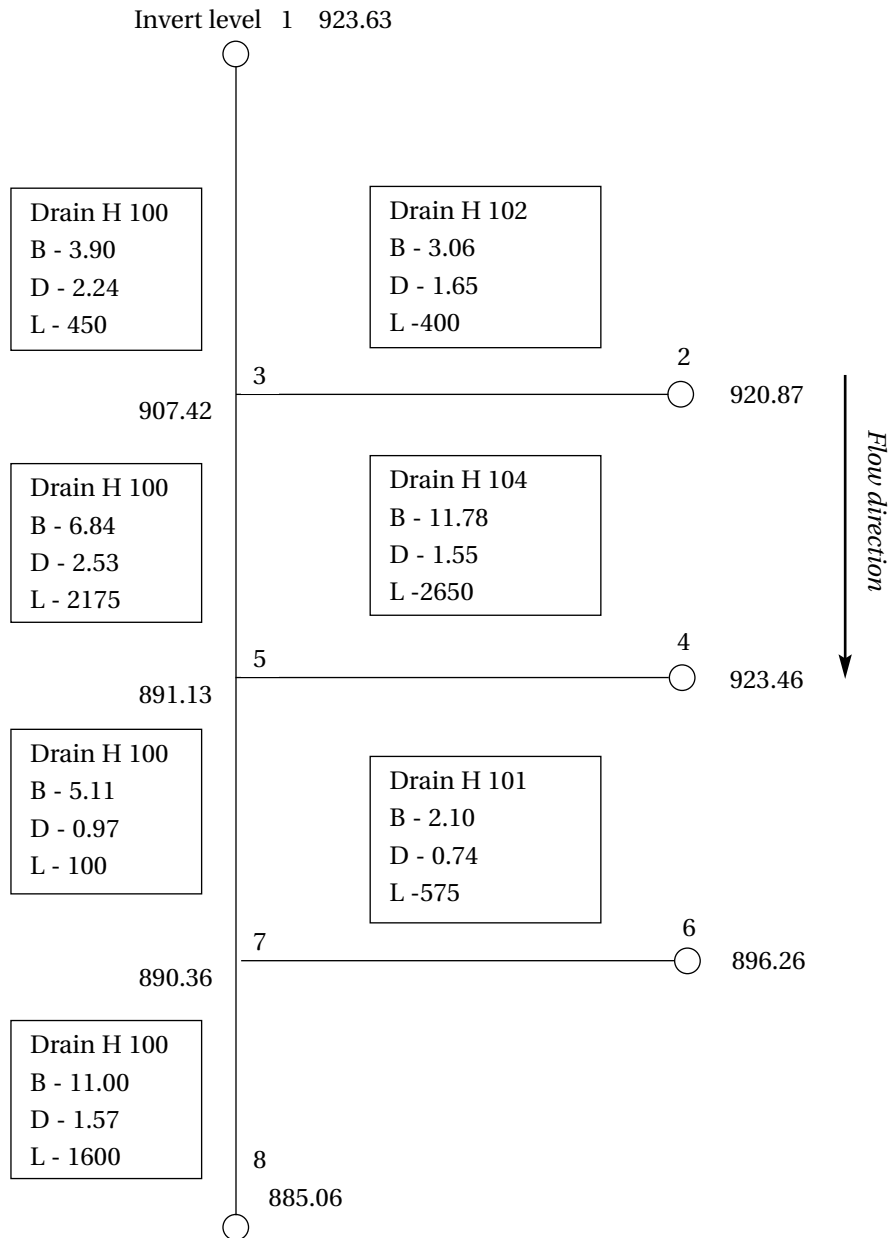


Figure 14.3: Line diagram showing the drainage system of Hebbal Valley

Table 8.1: Causal factors and key impacts

Causal factors	Key Impacts and remedial actions
Unplanned urbanisation	
Increase of impervious surfaces and non-upgradation of drains to handle enhanced runoff Encroachment of drain	Causes increased volume and rate of surface run-off from developed lands, which leads to more flash flooding and increased extent, height and frequency of flooding. ✓ Prevention of alteration of topography in the catchment. Upgradation of drains from top of catchment to catchment outlet for handling increases in run-off
Sediment and erosion from median strips and verges, spills from construction vehicles (e.g. concreting, earthmoving)	Reduced capacity, ✓ Improved catchment management practices
Development in flood-prone areas	
Encroachment and alteration of floodplain	Restricts flow and increases flooding on unfilled lands ✓ Control filling to overall valley Reduces flood storage capacity, increasing downstream flooding ✓ Undertake whole of catchment planning for drainage
Inadequate provision for main drains in development plans	Causes gradual reduction in waterway capacity due to encroachments ✓ enforce compliance ✓ Incorporate drainage reserves
Development below flood level	Creates high flood damage, lowers standard of housing and reduces property values ✓ Prepare flood level plans to a datum and use them to control building floors and other development
Cross drainage (and services in drains)	
Lack of capacity of cross drainage works	Causes localised and widespread flooding ✓ Reconstruct to a standard equal to the future drain requirements
Construction of services (water, telecommunication, power etc.) above invert and below flood level	Obstructs flow and aggravates flooding ✓ Relocate services, coordinate works and agree on service locations
Sewerage system in drains	
Reduction in stormwater system capacity	Increases flooding significantly ✓ Lower manholes and reconstruct sewers below drain invert
Obstruction and redistribution of stormwater flow, generally poorly constructed sections	Causes bank and bed erosion; flooding in the waterways ✓ Reconstruct and improve future designs
Solid waste disposal	
Dumping of solid waste and building site waste in the drainage channel	Causes blockage and pollution in the drainage system ✓ Implement solid waste strategy plan
Unstable and degraded waterways	
Weed infestation, encroachment, vegetation loss, and eroded and unstable riparian zones	Causes siltation of downstream waterways ✓ Treat erosion sites and develop guidelines for silt control during construction

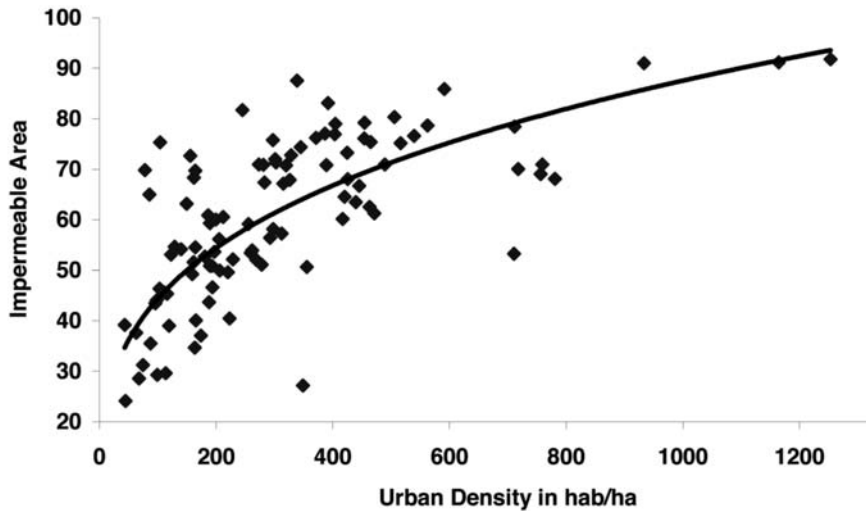


Figure 15: Impermeable area and urban density for Bangalore

buildings and most of the times, slum dwellers occupy the adjoining areas. At many sites, water is used for washing and household activities and even fishing was observed at one of these sites. Multi-storied buildings have come up on some lake beds that have totally intervened the natural catchment flow leading to sharp decline in the catchment yield and also deteriorating quality of waterbodies. Table 8.1 summarises the causal factors for poor drainage system and remedial measures to be undertaken to improve the condition.



Plate 4.3: Flooding In Banashanakari (Photo: Ranjini)

Landsat ETM+ data of 15 m spatial resolution (on fusing with Landsat ETM+ PAN) have been used to estimate impermeable areas that does not distinguish between types of urban land use (industrial, commercial and residential) but consist of a sample from a mixture of residential and commercial areas. Figure 15 shows the relation found between impermeable area to urban population density. Consequence of increase in built up pixels (evident from the increase in paved surface or impermeable area) is the increase of population density in a region.

There is a general lack of appreciation of the potential values and importance of waterways in the urban environment and also fragmented management approaches have contributed to decline in waterways in the catchment. Although sewerage system is provided in many drainage basins in the core area by BWSSB, there are still large quantities of raw and partially treated sewage flowing in the urban drains and ultimately polluting the lakes. This is due to combination of wastes discharged from un-sewered premises, branch sewers not connected to the trunk sewers, and effluent from trunk sewers that are under capacity due to siltation or higher than planned development densities. Another significant factor contributing to frequent flooding of low-lying areas and to unsanitary conditions in drains and lakes is the large and rapid accumulation of sediments in the drains, dumping of solid wastes, building debris and casual litter disposal on drains. Similarly, erosion control practices in construction sites, public parklands, private gardens and on the medians and verges of roads are not sufficient to prevent large silt loads



Plate 4.4: Encroachment of a drain by slums and disposal of solid and liquid waste

reaching the main drains. These factors, combined with infrequent clearance of drains, have lead to the unsanitary conditions in drains and to drains with much reduced capacity.

Also, due to increased paved surface and concentrated human activities the magnitude of the difference in observed ambient air temperature between urban pockets (artificial land surface) and the regions covered with vegetation (natural area), which is ascribed as urban heat island effect. The urban heat-island effect results in increased local atmospheric and surface temperatures in urban pockets compared to the surrounding open spaces, etc. Specifically, surface and atmospheric temperatures are increased by anthropogenic heat discharge due to energy consumption, increased land surface coverage by artificial materials having high heat capacities and conductivities, increased vehicular and industrial emissions and the associated decreases in vegetation and water pervious surfaces, which reduce surface temperature through evapotranspiration. An attempt is made here to understand the implications of land cover changes on local climate.

Inadequate drainage causes inconvenience and loss to the property and human life depending on the intensity (Plate 4.3). It leads to flooding of houses and establishments in the floodplains. In its least severe form, poor drainage causes water stagnation that provides a breeding ground for disease vectors.

Vulnerability of Communities with Poor Drainage

Socio-economic condition, age and gender decide the vulnerability. This is aggravated by type of dwelling as well as inadequate drainage in and around living areas. Many of the slums and informal settlements of poor communities are either located along the drainage lines or in low-lying areas (Plate 4.4). They build their houses using semi-permanent materials (such as earth, thatch and plastic sheets) that afford little protection from floods. These communities suffer extensive damage to their property in the event of even minor localised flooding and are also are vulnerable water logging from slow drainage of rainwater. Many of these settlements are illegal encroachments, the losses suffered by residents are never formally recognised or compensated. Vulnerability arising from the specific location of poor households is one of the key factors contributing to the inadequate living conditions of the poor in urban areas. Often plinths of houses in slums and informal settlements are lower than the road heights, which are raised over the years due to road development activities. Such areas require very good drainage, as even small quantities of stagnant water can flood the houses. Out of the 360 officially recognised slums in Bangalore only 30 percent have underground sewerage services. Hence, in the majority of slums wastewater must be discharged via the stormwater system, where one exists.

Efforts made to mitigate and manage the floods

Sustainable urban development is possible only with the effective good governance at local levels. These are more effective than statutory authorities in mobilising community resources and undertaking local action to improve or protect the local environment. There is a need to integrate the functioning of all parastatal agencies. Transferring lakes to local government ownership provide an incentive for collective community action against polluters. In 1988 the Government transferred responsibility for 114 tanks within the conurbation area from the Minor Irrigation Department to the Karnataka Forest Department (KFD). The total area of the tanks is 1584 ha, of which 220 ha are under unauthorised occupation. Between 1988 and 2000, the KFD fenced 37 tanks and posted watchmen, and undertook minor improvement works at 10 tanks. In Calcutta, for example, the major drainage is the responsibility of the Irrigation Department and the minor drainage is the responsibility of local governments. In Bangalore, local governments have to coordinate with the KFD, the Minor Irrigation Department, and the BDA.

Name of the village	Survey nos.	Proposed CDP Land use	Existing development
Bommanahalli CMC			
Puttenahalli	31 - 41, 55 - 60	Park	Residential
	29,30 (part)	Residential	Forest nursery
	51,61 (part)	Public & Semi Public	Mango garden
Sarakki kere	24,25	Park	Residential
Billekally DoresanypaIya)	151 (part), 154	Residential	Industry
Jaraganahalli	24,25 (Part)	Traffic & Transportation	Residential
Arekere	26, 30	Industry	Residential
Hongasandra	33, (part)	Residential	Industry
Bommanahalli	61	Park	Residential, industrial
Kodichikkanahalli	3, 4, 5, 6 (parts)	Commercial	Residential
	34, 35 (part)	Public & Semi Public	Residential
Devarachikkanahalli	20, 21 (part), 19 (part)	Public & Semi Public	Residential
Hulimavu	77 (part)	Park	Industry
	86	Park	Residential
	76, 78 (part), 79 (part) 80	Industrial	Predominantly residential

Krishnarajapura CMC.			
Kowdenahalli	82-84, 86, 87, 88P P(part)	Industrial	Residential
	89	Public & Semi Public	Residential
	90, 91, 92	Traffic & Transportation	Residential
Virjnapura	121 (part), 118-119P P(part)	Park	Residential
	23P P(part), 24P P(part), 103P P(part) 104 (part)	Traffic & Transportation	Residential
	34 (part), 35 (part), 42 (part)	Park	Residential
Krishnarajapuram	115 (part), 123 (part), 112 (part)	Public & Semi Public	Residential
G M Palya	123, 124	Industry	Residential
Devasandra	4 (part), 5, 6 (part), 7 (part)	Residential	Industry
Vibhuthipura	104 (part), 105 (part), 106 (part) 170 (part), 205 (part)	Railway	Residential
	108P P(part), 110P P(part), 184P P(part)	Park	Residential
Bhattarahalli	50, 51, 53, 54 (all part)	Green Belt	Industrial and residential
Medahalli	All survey nos.	Green Belt	Industry

Three statutes define the responsibilities and powers of local governments in Karnataka:

- *The Karnataka Municipalities Act 1964*, which applies to the CMCs and the TMC;
- *The Karnataka Municipal Corporations Act 1976*, which applies to the BMP;
- *The Karnataka Panchayat Raj Act 1993*, which applies to the panchayats.

Each statute sets out obligatory and discretionary functions and specific powers. The functions are in partial alignment with the functions that the Twelfth Schedule to *The Consitution) Seventy-fourth Amendment Act 1992*.

The 73rd and the 74rd amendments to the Indian Constitution in 1994 have been regarded as landmarks in the evolution of local governments in India. The Constitution (73PrdP Amendment) Act, 1992 (commonly referred to as Panchayat Raj Act) came into effect on April 24th, 1993 and the Constitution (74th Amendment) Act, 1992 (the Nagarpalika Act) came into effect on June 1st, 1993. While the 73rd amendment provides for constitution of Panchayats in rural areas, the 74th amendment provides for constitution of Municipalities in urban areas. Since local government is a State subject in Schedule VII to the Constitution, legislation with respect to local government can only

be done at the State level. Therefore, upon the coming into force of the 73PrdP and the 74PthP amendments, it was the task of the respective States to pass laws in conformity with the amendments.

The Comprehensive Development Plan (CDP)

In 1984, the Government of Karnataka approved the first CDP for BMA. The Government approved a revised plan in 1995 (GO Bi. HUD 139 MNJ, 5 Jan 1995). The CDP covers the entire 1279 km² of the BMA, comprising a 565 km² "Conurbation Area" and a 714 km² Green Belt. The CDP permits only a few types of development in the zone. BDA can demolish any construction in the Green Belt without its approval. However, extensive construction has taken place within the Green Belt.

Under *The Karnataka Town and Country Planning Act 1961*, any new layout in the region requires the approval of the BDA. The widespread practice of forming sites for sale out of agricultural land contravenes the Karnataka Land Reforms Act, the Karnataka *Land Revenue Act*, and the *Bangalore Development Authority Act*. Verification of development in the region, reveals numerous discrepancies from the CDP (Table 9.1 and Table 9.2).

Table 9.1 Deviations from CDP

City Development Plan (CDP, 2006. City Development Plan for Bangalore, BMP, Bangalore), prepared for the city of Bangalore by BMP, is a 6- year policy and investment

Table 9.2: Land use Pattern in BDA Area		
Category	Area (Hectares)	Area (%)
Residential	16,042	14.95
Commercial	1,708	1.59
Industrial	5,746	5.36
Park and open spaces	1,635	1.52
Public, semi-public	4,641	4.33
Transportation	9,014	8.40
Public utility	192	0.18
Water sheet	4,066	3.79
Agricultural	64,243	59.88

Source: CDP, 2006

plan (2007-12) designed to articulate a vision of how Bangalore will grow in ways that sustain its citizens' values. Bangalore city has developed spatially in a concentric manner. However, the economic development has occurred in a different manner in different sectors of the City. The current urban structure results from the interlocking of these two developments. Five major zones can be distinguished in the existing land occupation:

- **1st Zone - The core area** consists of the traditional business areas, the administrative centre, and the Central Business District. Basic infrastructure (acceptable road system and water conveyance), in the core areas is reasonably good - particularly in the south and west part of the city, from the industrial zone of Peenya to Koramangala. This space also has a large distribution of mixed housing/commercial activities.
- **2nd Zone - The Peri-central area** has older, planned residential areas, surrounding the core area. This area also has reasonably good infrastructure, though its development is more uneven than the core area.
- **3rd Zone - The Recent extensions** of the City (past 3-5 years) flanking both sides of the Outer Ring Road, portions of which are lacking infrastructure facilities, and is termed as a shadow area.
- **4th Zone - The New layouts** that have developed in the peripheries of the City, with some vacant lots and agricultural lands. During the past few years of rapid growth, legal and illegal layouts have come up in the periphery of the city, particularly developed in the south and west. These areas are not systematically developed, though there are some opulent and up-market enclaves that have come up along Hosur Road, Whitefield, and Yelahanka. The rural world that surrounds these agglomerations is in a state of transition and speculation. This is also revealed by the "extensive building of houses/layouts" in the green belt. Both BDA and BMRDA are planning to release large lots of systematically developed land, with appropriate infrastructure, to address the need for developed urban spaces.
- **5th Zone - The Green belt and agricultural area** in the City's outskirts including small villages. This area is also seeing creeping urbanization. While the core area has been the seat of traditional business and economy (markets and trading), the peri-central area has been the area of the PSU. The new technology industry is concentrated in the east & southeast. These patterns are obviously not rigid - especially with reference to the new technology industry and services that are light and mobile, and interspersed through the City, including the residential areas. Table 9.2 provides the current land use pattern in BDA area

While infrastructure in the City is reasonably good in some aspects (water and sewerage, for instance), it is under stress in other aspects, particularly urban transport. Qualitatively, the urban infrastructure situation is profiled in the following:

- **Water supply:** The availability of raw water at about 140 lpcd is adequate, though the draw distances are increasing progressively. UFW is high, and distribution is uneven - being better in the BMP areas and poor in the peripheral areas.
- **Storm water Drainage:** Drainage is an area of concern, with the natural drainage system (Valleys) being built upon. With the growth of the City, the number of lakes has dwindled, and small lakes and tank beds have vanished because of encroachment and construction activities. This has resulted in storm-water drains reducing to gutters of insufficient capacity, leading to flooding during monsoon. Dumping of MSW in the drains compounds the problems, leading to blockages. To control floods, it is important to remove silt and widen these storm water drains to maintain the chain flow and avoid water from stagnating at one point.
- **Transport:** Rising traffic congestion is one of the key issues in the City. Though the length of roads available is good, the problem lies with the restricted widths. BMTC is one of the best bus transport corporations in the country, but the absence of a rail-based commuter system compounds the problem.
- **SWM:** Collection and transportation coverage is very good, but proper and adequate treatment/ disposal facilities are lacking.
- **Green Areas & Water bodies:** The City has a tradition of being a "Garden City" with plenty of green spaces and water bodies. However, the very high growth rate in the past two decades is having an adverse impact on these.

Key Issues of Urban Drainage Systems

Urban drainage has a direct impact on the City's image, citizens' life, and health. If the system does not work properly, it leads to environmental hazards (CDP, 2006). Improving the urban drainage system requires not only capital infusion, but also recurring expenditures for operation and maintenance. A single point obstruction in a storm-water drain would have a cascading overall impact. Citizen awareness is therefore a critical issue, and citizens and non-governmental organizations can play a key part in monitoring development in the region to ensure that drainage is not obstructed, and dumping of debris and MSW in drains does not occur.

Adherence to best practice guidelines as pre conditions to issuing a permit for development will help to ensure that all development within the city contributes

positively to the maintenance of water quality, structural stability, hydraulic capacity and environmental and ecological values of the City's waterbodies. This includes:

- the protection and enhancement of the good water quality of the waterbodies and the improvement of areas of degraded water quality;
- the maintenance of the structural stability and hydraulic and flood carrying capability of the cities waterbodies;
- the protection of the water supply function (i.e. for irrigation) of the City's existing catchments, waterways and lakes;
- the inclusion of appropriate storm water quality and quantity management in the planning and design of developments; and
- the provision of adequate space for stormwater quantity and quality management infrastructure and the utilisation of existing features of the site such as drainage lines and waterbodies, in the design of the development and stormwater layout.

Suitable measures to assist in maintaining the pre-development storm water discharges include; retention/detention basins as part of a storm water treatment, increase in pervious areas on the site, the use of porous materials in those areas normally surfaced (such as footpaths); and the inclusion of on-site detention storage tanks with the design of multi-unit/building developments. The objectives of an urban drainage system should include:

- No encroachment of the designated waterway area or reduce the waterway area or obstruct the flows by filling in the floodplain
- ensuring habitable buildings are not flooded in major storms (i.e. 5, 10 or 25 year Average Recurrence Interval (ARI) or as appropriate).
- Flood waters do not present an unacceptable risk to personal safety in major storms (i.e. 5, 10 or 25 year ARI or as appropriate).
- Underground drains with sufficient capacity to ensure that flooding is not a regular nuisance in minor storms.
- The risk of pollution of drains and waterways minimised by preventing sewage discharge to storm water, by managing the storage and discharge of hazardous materials, by controlling land use and by reducing the major sources of pollutants.
- Drainage and waterways must be considered in the development of a strategic plan for future development including:
 - ✓ protection of waterways by incorporating open space as a designated waterway corridor in the City Plan. This will reduce future building encroachment and subsequent flooding; and

- ✓ any developments in the stormwater catchment will increase flooding and potential pollution of downstream. These issues should be considered in the planning stage, especially in cases where flood mitigation options are limited in the downstream system.

Drainage lines can contribute substantially to the landscape and open space amenity of development. A decision needs to be made as to the appropriate land take for drainage areas and the style of waterways to be adopted. Key actions required are:

Core Area Drain Rehabilitation: A broad approach towards correcting the more severe problems would involve work on cross drainage, cross services and sewers in manholes, together with new drains and wall replacement. Such works would be followed by the correction of severe - but more problematic - drain deficiencies. That may involve land resumption and major construction of walls. Approximately 81 km of main sewers are laid in drains. At least 20 km of these sewers are in need of replacement for capacity reasons. Additional lengths may have to be replaced for condition or other reasons. Similarly, drain improvements will require modification of these sewers. Total relocation of sewers out of drains is not essential and it is proposed that wherever a sewer needs to be replaced, consideration be given to relocation into adjacent roads or reserves. Of those sewers that will remain in drains, the vast majority should have their manholes modified to avoid flow obstructions. Sewer leakage and direct discharge to drains is to be addressed under the sewerage rehabilitation program.

Scheduled Drain Clearance: Until such time as drain inverts are redesigned for self-cleansing velocities and solid waste programs are implemented, ongoing regular clearance of drains is necessary to minimise flooding risks.

Even when drain upgrading as well as improvements in solid waste collection are completed, there will remain a need to remove silt and litter from the drains and inlets to tanks. In the longer term, catchment management practices which control silt loads from erosion sources will also need to be implemented.

Water Quality Improvements: At present, the principal causes of poor water quality are the sewage flows and large solid waste content in the drains. The sewer rehabilitation program would involve sewerage of unsewered premises (including those directly connected to drains); repair of sewer leaks; and upgrade of sewer capacity.

Capacity building: Training of drainage practitioners, operating within private and government organisations, is needed in a range of main drainage activities, including rainfall trends analysis, run-off estimation for small catchments, run-off estimation for larger catchments, using hydrograph techniques, hydraulic analysis of channels, culvert

and pipes, using basic and backwater techniques, planning and design for major and minor drainage systems; and powers and duties relating to drainage and planning legislation.

Land Use and Development Controls: Review of regional planning, including the Bangalore Metropolitan Region Development Authority (BMRDA) structure plans and the Comprehensive Development Plan (CDP) to include drainage policy, provision for identification of flood-prone lands and control of its subsequent development, creation of wide reserves and easements for primary and secondary drains and control of development in the floor of primary and secondary valleys with respect, at least, to building floor levels and set-backs from reserves. In implementing land use and development controls and in enforcing legislation, consideration needs to be given to the special needs of the urban poor who are likely to bear the disproportionate burden of such measures.

Legislation and Institutional Reforms: A comprehensive review of the institutional arrangements for management of primary and secondary drainage within the BMA is desirable, with a view to creating one single drainage authority with the responsibility for identification of flood-prone lands and flood levels, approval of development plans for layouts with respect to flooding and drainage, planning of all waterways and drainage, integration of waterways and drainage with urban land use planning, including identification of easements, setting of levels of service for all secondary and primary drains and lands adjacent to tanks, in conjunction with all stakeholders, preparation of integrated drainage plans for each main catchment; and Monitoring of development and advising planning authorities on non-complying urban development.

The roles of implementation and operation could be undertaken within existing and strengthened municipalities and/or an expanded BMP.

Education and Consultation: Environment education programs through schools, colleges, NGO's and mass media to raise community awareness and understanding of the risk of flooding, the importance of clean waterways and their role in supporting community well being, health and the overall life style in the city of Bangalore.

Best management practices (sediment fences, re-vegetation, sediment barriers, graded channels, dimension channels, etc.) for erosion and sediment control to manage development activities in a catchment, and involves:

- Erosion Control - the process of minimising the potential of soils to be eroded and transported in the first instance through the effects from wind, water or physical action through surface stabilisation, revegetation, erosion control mats, mulching, surface roughening, etc. These techniques represent a source control in preventing erosion of the soil material in the first instance.
- Sediment Control - the process of minimising the transport of eroded material



Plate 5.1: Removal of storm water drain encroachments in Nayandahalli, Bangalore (Source: BMP)



Plate 5.2: Removal of solid waste from the drain in KH Road, R.R. Nagar (Source: BMP)

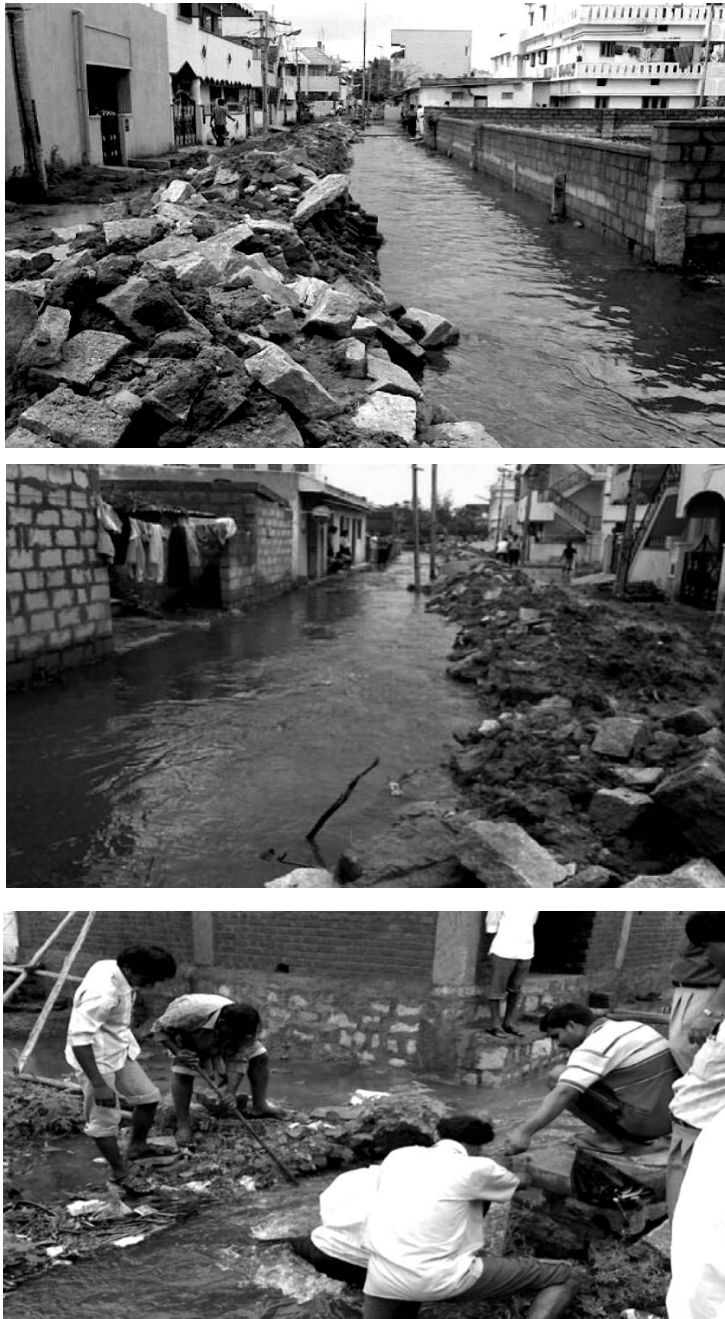


Plate 5.3: Removal of blockage in Kalappa layout (*Source: BMP*)



Plate 5.4: Desilting in Koramangala main valley, KH Road and Chalgatta valley

(source: BMP)



Plate 5.5: After desilting - Koramangala Valley, Vajapayee Nagar



Plate 5.6: Construction of RCC box drain in Puttenahalli (Source: BMP)



Plate 5.7: Remodelled storm water drain



Plate 5.8: Storm water drain retaining wall construction (Source: BMP)



Plate 5.9: Chain link fencing to prevent solid waste dumping (Source: BMP)

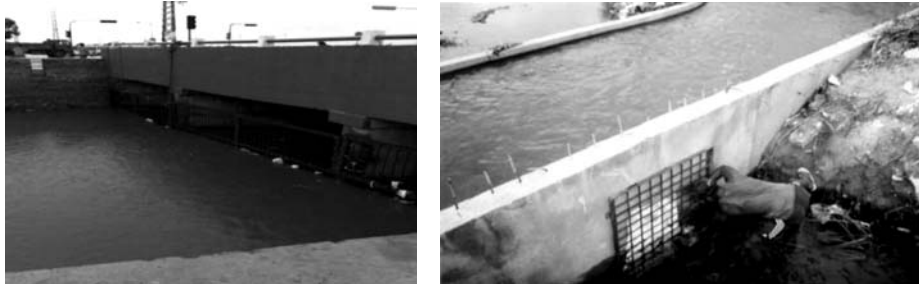


Plate 5.10: Providing screen in storm water drain



Plate 5.11: Restoration of Ulsoor lake with STP (Source: BMP)

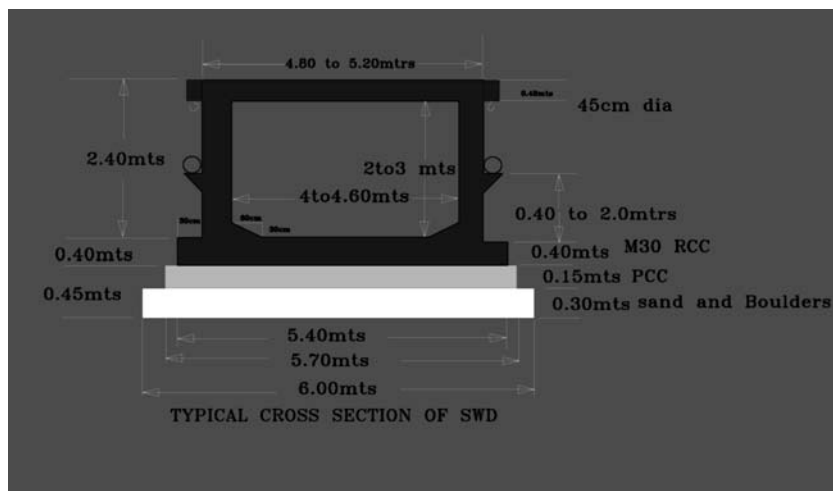


Plate 5.12: Redesign of storm water drain (Source: BMP)

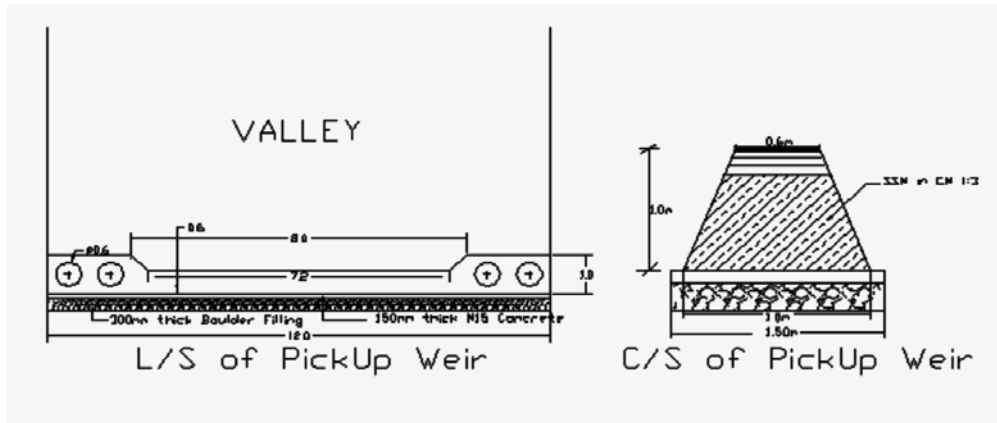


Plate 5.13: Design of pickup weir (Source: BMP)

(sediment) suspended in water or wind through catch drains, check dams, lined channels, grassed channels, and diversion channels, drop pipes, chutes and flumes.

In Bangalore, the sources of sediment supply to the drains include wash-off and erosion of unvegetated median strips, walkways and parklands, litter from trees and other vegetation, wash-off from roadways and impervious areas, wash-off and erosion from unmade roads and partially developed layouts, erosion of steeper unlined drains, construction site erosion or drainage water, drainage channel erosion and solid wastes dumped directly into drains or washed from pavements.

Key activities implemented for improvement of SWD

The key activities for improving storm water drains in the city included construction and rehabilitation of roadside drains, remodeling and strengthening, clearing silt, constructing of walls, laying of beds, provision of enabling and awareness information architecture and green area development. The action plan included:

- Clearing all encroachments that come in the way of the storm water drain network in the city (Plate 5.1);
- Aligning the drain network and checking blockage and overflowing of drains; Removing silt (Plate 5.2, 5.3, 5.4 and 5.5);
- Construction/remodeling/rehabilitation of road side drains (Plate 5.6 and 5.7)
 - Constructing 1,500 km of roadside drains (cost of construction assumed at Rs. 30 lakh per km for a 5-metre drain);

- Decreasing the load on Koramangala storm water drain (originating from Majestic and flowing into the Bellandur Lake) by building a bypass box canal from this drain via Agaram to the Bellandur Lake;
- Constructing a similar bypass canal via the Karnataka Golf Association; Reviewing existing storm water drains, ensuring connectivity of primary, secondary and tertiary drains;
- Constructing retaining walls (Plate 5.8);
- Redesigning for current load conditions along with building barriers between roads and open drains at crossings (Plate 5.9 and 5.10).
- Restoration and conservation of waterbodies (Plate 5.11)
- Laying of beds (plate 5.7);
- Remodelling of storm water drains (Plate 5.12 and 5.13);
- Provision of enabling and awareness information architecture; and
- Green area development.

The City is proposing to have a coordinated action plan to address the issue of urban drainage. At present BMP is coordinating the "valley projects," and is carrying out the works in coordination with other agencies, facilitated by the GoK.

Compounding the flooding problems are the unsanitary conditions created by large volumes of raw, or partially treated, sewage and large volumes of solid wastes entering the drainage system (Plate 5.2 and 5.3). Strategic options for rehabilitating and extending the Bangalore Water Supply and Sewerage Board (BWSSB) sewerage system and for expanding the BMP (Bangalore Mahanagara Palike) solid waste management system have been prepared. Following filing of writ petitions in 1999, and subsequent issuance of High Court Orders against the Government of Karnataka (GOK) and several authorities in Bangalore responsible for provision of environmental sanitation services, an Environmental Action Plan was devised to address the worst of the existing problems and remedial actions, including desilting of drains, have been completed in some localities (Plate 5.3 and 5.4).

The potential values and importance of waterways in the urban environment have been undermined consequent to fragmented management arrangements. Similar fate might befall the waterways in the rapidly developing lands within the Bangalore Metropolitan Area (BMA), but outside of, and downstream of, the BMP catchments. The critical issues that is to be addressed relates to the fact that inadequate drainage in a particular ULB jurisdiction may not have the impact in that ULB but elsewhere. Coordination and continuity of action between the ULBs is of critical importance.

Objective	Action Areas	Summary of Measures
Manage the Flood Risk		
Minimisation of the impacts of flood events and potential damage costs	Existing development (core area and outer area)	Introduce flood mitigation structural measures, (restriction removal, widening/deepening) Remove illegal encroachments Develop and implement awareness programs
To collect and provide best available data for managing the flood risk	Proposed development (core area and outer area)	Control land use, development Develop and implement awareness programs
	Develop spatila information system with an up to date Topographic, land use, hydrologic, flood impact data, etc.	Identify flood-prone areas, flood levels Collect flood impact information Conduct topographic surveys
Control Land Use Planning and Development		
Integrating urban storm water drainage functions in CDP	Land use planning	Amend planning legislation and regulations if necessary Incorporate drainage policy into structure and consolidated development plans (CDP) Provide drainage reservations in planning schemes
	Development controls	Impose development controls (filling levels, floor levels, reserves, set backs) for each drainage authority/municipality
	Monitoring and enforcement	Monitor encroachments and floor levels Enforce policy and regulations
Implement Effective Asset Operation and Maintenance		
To manage the urban storm water drainage assets economically and to protect public health and safety	Drain siltation and litter	Schedule and perform regular drain clearance Support solid waste strategy (at source collection) Trap gross sediment on tank inlets
	Asset condition monitoring and maintenance	Schedule inspections and audits of drain assets Conduct safety audits of tank embankments and spillways Prioritise maintenance activities
	Construction standards	Coordinate other infrastructure assets Develop design, construction and maintenance standards to reflect economic life cycle asset costing Apply construction standards through appropriate supervision and QA systems
	Drain safety	Erect warning signs, fencing, etc., where appropriate Minimise safety risks in design

Objective	Action Areas	Summary of Measures
Enhance the Environment and Social Conditions		
To expand and protect the social and environmental amenity of open urban waterways, where possible	Social equity	Promote community based representative decision making Set basin wide drainage levels of service Target improvement works according to agreed priorities
	Cultural and heritage	Restore water quality in tanks (drainage system) Desilt tanks Develop and implement education programs within an overall communications strategy Restore tanks
	Recreation/landscape	Landscape riparian lands Provide access and linkages along drainage corridors Provide in-stream features (water falls, swales, wetlands)
	Aquatic environment	Introduce water quality improvement actions Use alternative waterway design
Improve Water Quality		
To improve the quality of water in the drains and tanks	Sewage entering stormwater system	Extend sewerage system Repair sewer leaks Upgrade sewer capacities
	Litter & solid wastes	Collect solid wastes Develop and implement education and awareness programs
	Stormwater quality improvement	Enforce appropriate stormwater and catchment management practices (erosion control, litter and silt traps, street sweeping)
Provide Supporting Drainage Legislation and Regulations		
To provide effective drainage regulations and management arrangements	Drainage authority	Review roles and responsibilities of authorities involved in drainage and provide effective mechanisms for drainage planning, implementation, monitoring, enforcement and funding
	Land use planning	Amend structure plan, CDP to reflect drainage policy Amend municipal and planning legislation to provide adequate controls over land filling, floor levels etc.
	Building and development controls	
Prioritise Resources & Actions		
To provide adequate funding and resources for capital and recurrent activities according to agreed priorities	Priorities and funding	Collect supporting flood damage data Prepare integrated drainage management plans Consult with stakeholders on priorities Introduce general drainage tariffs Introduce development contributions to main drainage Allocate appropriately government grants and loans Use lending agency loans
	Training	Train practitioners in drainage management methodologies and techniques

Strategies for improved service delivery include:

- The importance of inter-ULB and Agency coordination;
- Inadequate drainage in a peripheral ULB may impact drainage in BMP areas;
- Improper drainage of BWSSB's system may pollute the valley system and impact quality of life across the City; and
- Improper roadside drainage and cross-connectivity may similarly impair system performance;
- Citizens to be involved to monitor contractor's activity on clearing of drain systems in their area;
- Citizens who dump debris into storm water drains could be penalized; and
- Removing silt to be a regular activity before the monsoons starting with the main (primary) drain.

Drainage management plans (DMPs) for each catchment are required to enable all deficiencies identified, an affordable level of service developed, all upgrades designed to a consistent standard and priorities set for implementation. Action plan suggested in this regard are listed in Table 9.3

Progress during 2008-09

The torrential rain of May 2006 crippled almost the entire city. Posh residential layouts, poor low-lying slums and even the busy streets such as Mahatma Gandhi Road and Vidhana Veedhi were affected. While parts of Jayanagar went without power for three days as the junction boxes were damaged following the rain, Church Street, Shantinagar, Rest House Road were inundated in knee-deep water. The impact of the rain in areas such as Ejipura, Jogupalya, Jeevanabimanagar, Murgeshpalya, parts of Sampangiramnagar and surrounding areas was devastating. During 2006 monsoon, people used boats to cross the road in this locality because of flooding of water. The water logging happens when the intensity of rain is high and whenever the flow of water into the drains is more than the discharge capacity. Several areas in the surrounding suburbs such as Puttenahalli, Pai Layout, HSR Layout and Bommanahalli were the worst-affected last year. That was because these areas did not have a stormwater drain network and, moreover, they had encroached upon lake-beds.

Traditional storm water management techniques simply collect the rain water and funnel it across the city downstream. Newer methods combine traditional approaches with new ones such as Sustainable Drainage Systems (SUDS). It employs a range of natural processes to purify urban runoff. Removal of sediment, bio-filtration,

biodegradation and water uptake by plants all help to remove pollutants. The city needs many such recharge wells in the catchment area of critical flood zones to detain flood waters and top up the aquifers instead of surface flow flooding. At the broader scale, tanks and lakes need to be networked and managed as retention and detention structures. With rainfall prediction accuracy being developed, tanks have to be linked to catchments and kept ready to hold the maximum water to dampen peak storm events. A desilted tank in Bengaluru can recharge up to 11 mm of water every day while an undesilted one can recharge hardly 1 mm. Desilted tanks can recharge aquifers quickly, lower the surface water levels and be in a position to function as flood mitigators. Full tanks are not good at dampening floods.

The Bruhat Bangalore Mahanagara Palike (BBMP) during 2008-09, focused on providing permanent solution to overflowing of storm water drains, water logging, and other related problems during rains. BBMP built a new storm water drain to prevent flooding in Bandeppa Colony. Similarly, a storm water drain was widened besides raising the height of retaining walls. BBMP was successful partially in evicting the encroachers of storm water drains as owners of buildings, built on the raja kaluve, had obtained stay orders from courts. The BBMP demolished 10 structures covering 600 sq.m. of drain area in Bhadrappa Layout in Hebbal. These structures had come up on the storm water drain leading to the Hebbal Lake. Work on increasing the height of retaining walls of storm water drain and providing gradient to shoulder drains at Bhadrappa Layout were in progress and the situation was likely to improve once the works were completed. BBMP established control rooms, including the zonal control rooms. The control rooms were fully equipped with men and material. Of the 280 identified vulnerable areas, 48 had been marked under "A" category and four of these are under "A+" category (the region highly vulnerable). The Central Silk Board area, Puttenahalli, Arakere, Nayandanahalli, Katriguppe, Illyas Nagar, Bhadrappa Layout, S.T. Bed Layout, Kamakhya Layout, Hennur, Ejipura and Bandappa Colony are these vulnerable spots.

Strategies for the future

Strategy to incorporate Integrated Storm Water Management (ISWM) approach to flood management integrating land and water resources development in a lake catchment or river basin, within the context of integrated water resources management, and aims to maximize the net benefit from floodplains and to minimize loss to life from flooding.

This is based on

- A participatory approach involving users, planners and policy-makers at all levels and should be open, transparent, inclusive and communicative.

Table 10 - Strategic Actions

Proposed Actions	How	Possible Implementation Mechanisms
Integrated catchment based management and planning to improve catchment landuse and drainage conditions	Developing Catchment and Stormwater Management Plans (CSMP) to integrate all stormwater issues on catchment levels including: Water quality, flooding, waterways, assets management and funding, planning and development control, and other environmental and social issues. More details on typical CSMP's contents, objectives, and outcomes are presented in section 8.2 of this report.	Catchment and Stormwater Management Plans should be developed for each major catchment. Significant coordination between all stakeholders is required. This study would require multi-disciplinary team, with expertise in hydrology, environmental, planning and socials issue.
Enforce best practice guidelines as conditions to issuing permits for new or reconfiguration of developments	This should include guidelines for: This should include guidelines for: • Erosion and sediment controls • Setting Floor levels above designated floods) • Restrictions on filling in the floodplain and obstruction to flow • Legal point of discharge and connection to storm water and sewerage systems. • Storm water quality objectives and treatments prior to discharge. • Preferred subdivision layout in relation to storm water assets.	Accountability of the agency to ensure implementation of best practice information
Stormwater management solutions to the overall urban water cycle and water conservation strategy	• Encourage and promote "water sensitive urban design" for maximising infiltration, treatment of stormwater runoff by grass strips, reduction in paved areas in new developments. • Rehabilitate and maximise the use the remaining waterbodies to reduce flooding through retardations and to maximise infiltration to groundwater by retaining floodwaters in these basins. • Maintain (where possible) the natural conditions (i.e.; unlined) of the channels and waterways to maximise infiltrations to groundwater and also to treat water quality.	The BMP should develop and promote best practice design manual for urban developments and implement these options in the development of the flood mitigation strategy.
Regular water quality monitoring in major waterbodies through a network of educational institutions	This helps to establish base line data, assess the impacts of land use changes and management practices on water quality, and provide instructions for water usage and human health purposes. • Review the conditions and the importance of waterbodies • Identify priority areas	The key objective is to monitor improvements rather than to confirm existing conditions are poor.

Proposed Actions	How	Possible Implementation Mechanisms
	- Determine the type and frequency of monitoring required (this should include average values and events monitoring) - Develop and undertake program for storm water quality monitoring	
Minimise flooding	Identify educational institutions to undertake at regular interval drainage and flood studies for the city to: Identify existing drainage system and flood prone areas. - Develop overall flood mitigation strategy for the city. - Prioritise and undertake the mitigation works based on flood risks. - Control new developments, which may impact on flooding.	Develop centralised infrastructure database with a network of institutions. BMP currently embarking on major flood study, Flood mitigation options and strategy will need to be coordinated and endorsed by a number of other authorities to cover issues such as land resumption, planning, changes in sewerage system.
Establish designated flood levels along the main waterway, to provide guidance for new developments or reconfiguration of existing developments.	- Determine flood profile for the high flood levels (say 10, 20 or 50 years ARI) from the t drainage study - Use new survey and contour maps to plot the extent of the flood levels along the waterways. - Use GIS based technology to develop a spatial database with web based information systems.	BMP to develop and maintain spatial information systems
Protect the remaining waterways corridor from encroachments of new developments	- Identify preferred waterway corridor width based on the above high flood levels and other planning and environmental factors. - Incorporate the corridor in the Comprehensive City Plan as designated areas for new or reconfiguration of developments.	As part of the review of the City Plan, the BMRDA, BDA in conjunction with the BMP should incorporate the designated corridor area into the plan.
Minimise sewage inflow to storm water	- Separation/ relocation of the sewerage system from stormwater system - Implement the Sewerage Master Plan including treatment plant upgrade. - Enforce/develop planning laws on illegal connections. - Develop and upgrade guidelines on sewer construction and maintenance	Establish coordinating committee/taskforce between BWSSB and BMP to coordinate these issues and to undertake an option study (risk, cost, constraints) to identify the preferred option to separate the two systems.

Proposed Actions	How	Possible Implementation Mechanisms
		It is may be cost effective to incorporate this option investigation study into the BMP current drainage study. The BWSSB may provide additional funding to this component of the study.
Integrated Municipal Solid Waste Management	Adoption of an appropriate strategy is essential for any improvement in the storm water quality and quantity in Bangalore.	Implementation to conform MSW Rule, 2000.
Community education programs to improve understanding of the important of clean drainage and waterways	Raising community awareness and understanding of the risk of flooding, the importance of clean waterways and its role of supporting the community well being, health and the overall life style in the City of Bangalore. with numerous successes around the world. This can be undertaken in various forms: • Environmental education at schools and colleges • Education through mass media • Encouraging the community to be involved in catchment care groups • CBD and NGO's to develop and implement catchment management plan.	• Schools and colleges • NGO's and CBO's • BMP

- Decentralization of decision-making is necessary, with full public consultation and involvement of stakeholders in planning and implementation.
- Coordination at the highest level to promote coordination and cooperation across functional and administrative boundaries needs to be ensured.
- Land use planning and water management are combined in one synthesized plan, through coordination of land and water management authorities to achieve consistency in planning.
 - ♦ Clearing all encroachments that come in the way of the storm water drain network in the city.
 - ♦ Restoring all lakes. Removal of all encroachments in lake catchments
 - ♦ Declaring 500 m around the lake as no activity zone
 - ♦ Aligning the drain network and checking blockage and overflowing of drains.
 - ♦ Reviewing existing storm water drains, ensuring connectivity of primary, secondary and tertiary drains.

Redesigning for current load conditions along with building barriers between roads and open drains at crossings.

Thus, an integrated approach to stormwater management maintains the traditional function of minimising flooding, in addition to integration of water quantity and quality management policies and practices with the coordinated, total catchment approach to the issues of stormwater management. In addition to flood management, a primary goal is to protect downstream water bodies from contamination and erosion, while maintaining, or in some cases re-establishing, natural waterways and wetland features as part of the drainage network. The location and design of significant stormwater management infrastructure (e.g. drainage corridors, culverts, etc.) is to be based on a firm understanding of the local needs/values, legislative requirements and practical constraints considering the hydraulic, hydrologic, environmental, economic, social, legal and practical aspects. For example, maintaining or improving the natural conditions of a waterway in Bangalore (i.e., widening and grading the banks) instead of channelising and concreting, could bring multiple benefits including flood mitigation, water quality improvement by vegetation and recreational benefits. Suggested strategic actions are outlined in Table 10.

The storm water system consists of many natural water-bodies and a high-density waterway system. Sewage contamination leading to eutrophication of waterbodies would result in a major health and socio-economic disaster for the city. Some receiving waterbodies have no major outlets and pollutants are accumulated in the sediment deposits. Litter, discarded building materials, sediments and other solid waste items are the main causes of blockages of the drainage system resulting in flooding in some pockets of Bangalore.

The objective of Catchment and Storm water Management Plan is to integrate all water quality, quantity and waterways issues from a catchment perspective to enhance and stabilise degraded waterways, minimise flood risk, maximise amenity and property values and improve water quality in the stormwater system with the following objectives:

- Prevention of raw sewage from entering the stormwater system;
- Promotion of best management practices to improve stormwater quality;
- Management of storm water drainage ensuring the protection of waterways, water quality and minimising floods;
- Integration of water quality management with flooding and waterway corridor management issues;
- Design and implementation of flood mitigation schemes (where necessary) to

minimise the impacts of large flood events and potential damage costs;

- Mapping and monitoring of flood prone areas and flood levels along the waterways under appropriate Average Recurrent Interval storms through drainage and flood studies. Based on the designated flood levels along the main waterway system, waterway corridors are to be determined and to be incorporated as "no development" areas into the City Comprehensive Development Plan to prevent development within these corridors.
- Alteration in topography in the catchment area to be banned through an appropriate legislative measures;
- To provide and coordinate an information and education program for the community and schools to improve understanding of the risk of flooding, the importance of clean waterways and their role in supporting the community well being, health and the overall lifestyle in the City. The objective should be to achieve increased community involvement in waterway care.

List of Abbreviations

ARI	Average Recurrence Interval (years)
BDA	Bangalore Development Authority
BMA	Bangalore Metropolitan Area
BMP	Bangalore Mahanagara Palike (or Bangalore City Corporation)
BMRDA	Bangalore Metropolitan Region Development Authority
BWSSB	Bangalore Water Supply and Sewerage Board
CBO	Community Based Organisation
CDP	Comprehensive Development Plan
CMC	City Municipal Council
CPHEEO	Central Public Health and Environmental Engineering Organisation
DMP	Drainage Management Plan
GIS	Geographic Information System
GOK	Government of Karnataka
KSCST	Karnataka State Council for Science and Technology
KSPCB	Karnataka State Pollution Control Board
LDA	Lake Development Authority
NGO	Non-government Organisation
TMC	Town Municipal Council
UGD	Underground Drain for Sewerage

References

- Asian Development Bank (2001). Cities Data Book: Urban Indicators for Managing Cities, (Eds. Westfall M S and de Villa V A), Asian Development Bank, Manila, Philippines.
- Bangalore Mahanagara Palike (2006) City Development Strategy Plan, Report submitted to Ministry of Urban Development, Government of India, New Delhi.
- Bangalore Metropolitan Transport Corporation (2006) *At present*, Statistics available online: <http://www.bmtcinfo.com/english/atpresent.htm> Last Accessed: 20th November 2006
- Buchanan F (1870) A journey from Madras through the countries of Mysore, Canara and Malabar, Vol. 1-3, Second Edition, Higginbotham and Co., Madras.
- Census of India (2001a) Primary Census Abstract – Andhra Pradesh, Karnataka and Lakshadweep, Directorate of Census Operations, Government of India, New Delhi.
- Census of India (2001b) Migration Data for Urban Agglomerations in Karnataka - D-series, Directorate of Census Operations, Government of India, New Delhi..
- Chandramouli K (2002) *HA grand dream*, The Hindu, 18 July, 2002, The Hindu Group. Available online: <http://www.hinduonnet.com/mp/2002/07/18/stories/2002071800480200.htm> Last Accessed: 20th November 2006
- D'souza R (2006) *Impact of privatisation in Bangalore*, Outreach Scholarship Report, Centre for Education and Documentation, Bangalore.
- Ghosh A (2005) Public-Private or Private Public?: Promised Partnership of the Bangalore Agenda Task Force *Economic and Political Weekly* Special Articles, 19-Nov-2005. Available online: <http://www.epw.org.in/showArticles.php?root=2005&leaf=11&filename=9367&filetype=html> Last Accessed: 29th March 2007
- Government of Karnataka (2005) Karnataka at a glance – 2004-05. Directorate of Economics and Statistics, Government of Karnataka.
- Heitzman J. (2004) *Planning for an Information Society: Bangalore City* Oxford.
- iDeCK and Rites (2005) *Rapid Traffic Study: Identification of traffic corridors in Bangalore*, Infrastructure Development Corporation (Karnataka) Limited and Rites, Bangalore.
- Kamath S (1990) Places of interest, Karnataka State Gazetteer: Bangalore district, Chapter 19, Government of Karnataka, Bangalore.
- Karnataka Urban Infrastructure Development and Finance Corporation (2006) *Infrastructure Development and Investment Plan for Bangalore: 2006–30*, Final Report, Karnataka Urban Infrastructure Development and Finance Corporation, Bangalore.
- Karthikeyan S (1999) The fauna of Bangalore - the vertebrates and butterflies of Bangalore: A checklist, World Wide Fund for Nature – India, Karnataka State Office, Bangalore.
- Nair J (2005) *Bangalore: The promise of a Metropolis* Oxford.
- PIA (2003) PIA Technical Directory. Peenya Industries Association, Bangalore.
- Ramachandra T.V and Uttam Kumar, 2008. Wetlands of Greater Bangalore, India: Automatic Delineation through Pattern Classifiers, *The Greendisk Environmental Journal*. Issue 26 (International Electronic Jour. URL: (<http://egj.lib.uidaho.edu/index.php/egj/article/view/3171>))
- Regional Transport Office (2006) Vehicle strength and growth in Bangalore. Regional Transport Office, Transport Department, Government of Karnataka. Available online: <http://rto.kar.nic.in/bng-veh-stat.htm> Last accessed: 19th March 2007.
- Sudha P and Ravidranth N H (2000) A study of Bangalore urban forest. *Landscape and Urban Planning*, 47: 47-63.
- Sudhira H.S., Ramachandra T.V., Bala Subramanya M.H., 2007. City Profile: Bangalore., *Cities* 124(4): 379-390.
- United Nations Development Programme (2001) Human Development Report – 2001, *Making new technologies work for human development*, UNDP, New York and Oxford University Press, New York.
- HVarghese T (2006) A new species of the ant genus *Dilobocondyla* (Hymenoptera: Formicidae) from India, with notes on nesting behaviour, *Oriental Insects*, 40: 23-32.H
- Aswathanarayana, G 2000. *Pre-feasibility Report on Proposed Development of Stormwater Drains of Koramangala Valley, Bangalore City*, for KHB, BWSSB, Bangalore.
- Beukering van Pieter, Sehker M., Gerlagh Reyer and Kumar V. (1999). Analysing urban solid waste in developing countries: a perspective on Bangalore, India. *CREED Working Paper Series No. 24*, International Environmental Economics Programme, London, UK. pp. 22.
- BWSSB, 2003. Bangalore water supply and environmental sanitation master plan - report, Bangalore
- http://en.wikipedia.org/wiki/Infrastructure_in_Bangalore
- <http://homepages.rootsweb.ancestry.com/~poyntz/India/images/Bangalore1924.jpg>
- <http://www.mapsofindia.com>
- Ramachandra, T.V. 2002. Restoration and Management Strategies of Wetlands in Developing Countries, *The Greendisk Environmental Journal*. (International Electronic Jour. URL: <http://egj.lib.uidaho.edu/egj15/ramacha1.html>).
- Ramachandra T.V. and Saira Varghese K. 2003. Exploring possibilities of achieving sustainability in solid waste management, *Indian JI Environmental Health*, 45 (4):255-264.
- Ramachandra T.V. and Uttam Kumar, 2004. Watershed Management using GRDSS, GIS and Development 8(8):20-26 (India)
- Ramachandra T.V., 2006. Management of Municipal Solid Waste, Commonwealth Of Learning, Canada and Indian Institute of Science, Bangalore.
- Ramachandra T.V. 2006. Soil and Groundwater Pollution due to Agricultural activities, Commonwealth Of Learning, Canada and Indian Institute of Science, Bangalore, Printed by Capital Publishing Company, New Delhi.
- Ramachandra T.V. and Shruthi Bachamanda, 2007. Environmental audit of Municipal Solid Waste Management, *Int. J. Environmental Technology and Management*, 7(3/4): 369-391.
- Ramachandra T.V., 2007. Spatial Analysis and Characterisation of Lentic Ecosystems: A Case Study of Varthur Lake, Bangalore, *International Journal of Ecology and Environment*, 9(8):39-56.
- Ramachandra T.V and Uttam Kumar, 2008. Wetlands of Greater Bangalore, India: Automatic Delineation through Pattern Classifiers, *The Greendisk Environmental Journal*. Issue 26 (International Electronic Jour. URL: (<http://egj.lib.uidaho.edu/index.php/egj/article/view/3171>))
- Ramachandra T.V., and Uttam Kumar 2008 (in press). Geoinformatics for Urbanisation and Urban Sprawl pattern analysis, a chapter in a book *Geoinformatics for Natural Resources Management* (eds: Joshi P.K., Pani, P. and Mohapatra, S.N.), TERI Press, New Delhi
- The Expert Committee. (2000). Manual on Solid Waste Management. 1st edn, Ministry of Urban Development, Government of India,

New Delhi, India.

- http://www.downtoearth.org.in/editor.asp?foldername=20000930&filename=Editor&sec_id=2&sid=1
- http://www.rainwaterharvesting.org/catchwater/oct2000/newslet9_1.htm
- http://www.thisismyindia.com/pictures_of_india/bangalore-pictures.html
- Prasad, S.N., Ramachandra, T.V., Ahalya, N., Sengupta, T., Alok Kumar, Tiwari, A.K., Vijayan V.S. and Lalitha Vijayan, 2002. Conservation of wetlands of India – a review, *Tropical Ecology*, 43 (1): 173-186.
- Ramachandra, T.V. 2002. Restoration and Management Strategies of Wetlands in Developing Countries, *The Greendisk Environmental Journal*. (International Electronic Jour. URL: <http://egj.lib.uidho.edu/egj15/ramacha1.html>).
- Ramachandra T.V., 2007. Spatial Analysis and Characterisation of Lentic Ecosystems: A Case Study of Varthur Lake, Bangalore, *International Journal of Ecology and Environment*, 9(8):39-56
- Ramachandra T.V., Subash Chandran M D., Gururaja K V and Ramachandra T V, 2007. Cumulative Environmental Impact Assessment, Nova Science Publishers, New York.
- Vijay Kulkarni and Ramachandra T.V., 2006. Environmental Management, Commonwealth Of Learning, Canada and Indian Institute of Science, Bangalore,
- WHGM, 2003. Water Harvesting Guidance Manual City of Tuscon, Department of Transportation, Stormwater Management Section Arizona .



CIVIC AGENCIES – APATHY & INEFFICIENCY



ENERGY AND WETLANDS RESEARCH GROUP

SAHYADRI: ENVIRONMENTAL INFORMATION SYSTEM (ENVIS)

CENTRE FOR ECOLOGICAL SCIENCES

NEW BIOSCIENCE BUILDING, III FLOOR, E-WING, LAB: TE15

Indian Institute of Science, Telephone : 91-80-22933099/22933503(Ext:107)/23600985

Fax : 91-80-23601428/23600085/23600683[CES-TVR]

Email : tvrr@iisc.ac.in, energy.ces@iisc.ac.in

Web: <http://ces.iisc.ernet.in/energy>, <http://ces.iisc.ernet.in/biodiversity>

Open Source GIS: <http://ces.iisc.ernet.in/grass>