



Energy and Environment

# KERALA ENVIRONMENT CONGRESS 2011

25<sup>th</sup>, 26<sup>th</sup> and 27<sup>th</sup> August 2011, Thiruvananthapuram

*Organised by*



**Centre for Environment and Development**  
Thiruvananthapuram

*In Association with*

**Rajiv Gandhi Centre for Biotechnology**  
Thiruvananthapuram

# Decentralized Energy Potential of Bangalore Solid Waste

**Shwetmala, Chanakya H.N\* and Ramachandra T.V**

*Centre for Sustainable Technologies, Indian Institute of Science, Bangalore 560012, India*

*(\*-corresponding author; chanakya@astra.iisc.ernet.in)*

## INTRODUCTION

With an estimated population of 7.8 million, Bangalore is among the five large cities of India. It covers an area of 800 km<sup>2</sup> (BBMP, 2010). The city's waste is characterized by a high content of fermentable components (72%) where domestic and eatery sectors contribute over 75% of total wastes (Chanakya and Sharatchandra, 2005). Presently, Bangalore employs a quasi-centralized collection system leading to landfilling of collected wastes. Various forms of informal waste recycling processes function in the cities of Karnataka and their value addition has been described earlier (Van Beukering, 1994).

## USW GENERATION

Bangalore city generates around 3000 to 4000 tpd of USW– the daily collection is estimated at 3600 tpd (Chanakya *et al.*, 2009). It comprises of wastes generated from residences, markets, hotels and restaurants, commercial premises, slums, street sweepings and parks. Residence contributes 55% of total of wastes and is highest among all sources (TIDE, 2000). Waste generated from hotels and eateries form about 20%, fruit and vegetable markets contribute about another 15%, trade and commerce about 6% and from street sweeping and parks form about 3%. The slum areas contribute only 1% of total USW, since in Bangalore slum population and area is low in comparison to other towns and cities.

## USW COMPOSITION OF SEVEN CITIES OF KARNATAKA

The waste composition of Bangalore comprising: 72% fermentables, 11.6% paper and cardboard, 1.01% cloth, rubber, PVC and leather, 1.43% glass, 6.23% polythene, 0.23% metals and 6.53% of dust and sweeping (TIDE, 2000) is given in Table 1. In one study we have conducted in year 2010 in seven important cities (Tumkur, Puttur, Mandya, Hassan, Davangere, Chikkaballapur, Belgaum and Nanjangud) of Karnataka. We have selected 15 houses randomly at the ward level and it has been

monitored for three continuous days. Waste composition of seven cities show 82% fermentable, 11% paper and cardboard, 8% plastic and 1% of metal. City-wise waste composition is given in Table 2. Among all cities, Chikkaballapur and Hassan have high percentage of fermentables. Percentage of paper and cardboard and plastic are highest in Tumkur.

**Table 1**  
**Physical composition of USW in Bangalore**

| Waste type                     | Composition (% by weight) |         |                   |                         |       |                           |                     |
|--------------------------------|---------------------------|---------|-------------------|-------------------------|-------|---------------------------|---------------------|
|                                | Domestic                  | Markets | Hotels/<br>eatery | Trade and<br>commercial | Slums | Park /street<br>sweepings | Avg. All<br>sources |
| Fermentable                    | 71.50                     | 90      | 76                | 15.6                    | 29.9  | 90                        | 72                  |
| Paper and<br>cardboard         | 8.39                      | 3       | 17                | 56.4                    | 2.49  | 2                         | 11.6                |
| Cloth, rubber,<br>PVC, leather | 1.39                      |         | 0.33              | 3.95                    | 0.54  | 0                         | 1.01                |
| Glass                          | 2.29                      |         | 0.23              | 0.65                    | 8.43  | 0                         | 1.43                |
| Polythene/<br>plastics         | 6.94                      | 7       | 2                 | 16.6                    | 1.72  | 3                         | 6.23                |
| Metals                         | 0.29                      |         | 0.26              | 0.38                    | 0.23  | 0                         | 0.23                |
| Dust and<br>sweeping           | 8.06                      |         | 4                 | 8.17                    | 56.7  | 5                         | 6.53                |

Source: TIDE, 2000

**Table 2**  
**Physical composition of domestic USW in seven cities of Karnataka**

| Waste type                      | Composition (% by weight; source – unpublished CST report) |        |        |        |                |                     |             |               |             |
|---------------------------------|--|--------|--------|--------|----------------|---------------------|-------------|---------------|-------------|
|                                 | Tumkur   | Puttur | Mandya | Hassan | Davan-<br>gere | Chikka-<br>ballapur | Belga<br>um | Nanj<br>angud | Aver<br>age |
| Fermentable                     | 84.37  | 78.95  | 77.94  | 91.37  | 81.43          | 92                  | 83.83       | 69            | 82.36       |
| Paper and cardboard             | 35.35  | 5.62   | 13.02  | 4.99   | 6.24           | 4                   | 7.33        | 8.50          | 10.63       |
| Leather and Cloth /<br>textiles | 0  | 0.90   | 0      | 0      | 1              | 0                   | 1.31        | 0             | 0.40        |
| Glass                           | 3.77   | 4.11   | 0      | 0      | 2              | 0.38                | 2.34        | 1             | 1.70        |
| Polythene /plastics             | 18.64  | 7.37   | 9.04   | 3.64   | 9              | 2                   | 5.50        | 7.13          | 7.79        |
| Metals                          | 0  | 2.78   | 0      | 0      | 2              | 0.64                | 0.41        | 0.02          | 0.73        |
| Inert and dust                  | 0  | 0      | 0      | 0      | 3.14           | 0                   | 0.71        | 14.97         | 2.35        |
| Recyclables                     | 0  | 0.27   | 0      | 0      | 0              | 0                   | 0.17        | 0             | 0.05        |

When we compare physical waste composition of small cities with metropolitan cities, it is clear that both have high percentage of fermentables. Fermentables incorporate food waste, garden waste, vegetable waste and fruit waste. The elemental composition of these constituents of fermentable is derived based on elemental mass percentages on dry basis as listed in Table 3. The average elemental composition

of the organic fraction of the USW is presented as  $C_5H_{8.5}O_4N_{0.2}$  (Bizukoje and Ledakowicz, 2003). Degradation of fermentables in the open environment emits Green House Gases (GHG) like methane ( $CH_4$ ) and nitrous oxide ( $N_2O$ ) along with leachate containing Carbon and Nitrogen impacts the underlying lithological strata. High percentage of wet and fermentable waste, require daily removal and treatment. In a decentralized system, wastes gathered from primary collection by handcarts may be subject to immediate treatment by aerobic composting or biomethanation within the locality or ward. In wardwise waste treatment with biomethanation, as the wastes gradually becomes enriched with decomposable material; it also becomes an increasing source of energy. From 1988 to 2000 there is reasonable change in waste composition: fermentable, paper and plastic has increased by 7%, 3% and 0.2%, respectively.

**Table 3**  
**Elemental composition of these constituents of fermentable**

| Waste type           | Mass percentages on a dry basis |      |       |      | Elemental composition, based on molecular weight of elements |
|----------------------|---------------------------------|------|-------|------|--|
|                      | C                               | H    | O     | N    |  |
| Food waste           | 44.83                           | 6.38 | 32.13 | 2.83 | $C_{18}H_{32}O_{10}N$  |
| Yard or garden waste | 42.35                           | 5.33 | 31.89 | 1.62 | $C_{29}H_{44}O_{17}N$  |
| Vegetable peels      | 49.06                           | 6.62 | 37.55 | 1.68 | $C_{34}H_{55}O_{20}N$  |
| Fruit peels          | 47.96                           | 5.68 | 41.67 | 1.11 | $C_{51}H_{72}O_{33}N$  |

Source: Rhyner *et al.*, 1995; Tillman, 1991 as referenced in Meraz *et al.*, 2003

## ENERGY AND RESOURCE RECOVERY CLOSE TO SOURCE OF GENERATION

### Case 1: Potential recovery with aerobic composting

Ideal USW processing requires near perfect source segregation of USW at the point of generation – namely households. This requires a great social/attitudinal change and is likely to be slow in happening. A medium term measure is possible: segregation immediately outside houses - during collection immediately thereafter. There are many dispersed attempts to do so - the RMV II experience in Bangalore is cited here. This field data collected for 21 days in a ward 'RMV extension stage II' near IISc campus. BBMP is managing the MSW at this locality. The ward councillor was interested in improving waste management system. A 60 days project was started by NGO 'Exnora Green Cross' in this locality. The system planned included primary collection with gradually increasing level of source segregation (into organic and inorganic waste), storage and disposal of different types of solid waste in an environmentally friendly manner. Trained waste collectors were appointed for door-to-door collection and for waste segregation. Every day on an average around 2.6 kg fermentable wastes were collected from each of the families. The fermentables (including food waste and garden wastes) were composted on raised platforms to ensure better aeration and lower smell. With the progress of time number of composting beds was increased. This increased number of compost beds increased

the associated problems like smell and flies. After 21 days this project was stopped by ward councillor fearing election reversely. However, meticulous data was collected as to the types and quantities of recyclables that were brought to this site. Based on this project information, economic costs are calculated for decentralized waste management with compost plant as given in Table 4. Under the existing scenario, we show that with compost as the main product and in an enterprise mode and under conditions existing in Bangalore the cost recovery period would be in the range of 4 years (Table 4, assuming 100% recycling). This is however identified and may not be achieved easily. The potential capability to recycle may then be between 50-80% of recyclables in the wastes. Under this optimum scenario it is clear that capital recovery may not be possible at all.

**Table 4**  
**Decentralized Waste Management with compost plant**

| <b>Decentralized Waste Management with compost</b> |                  |                         |
|--|------------------|-------------------------|
| <b>Categories</b>                                  | <b>Rs/year</b>   | <b>Optimum Scenario</b> |
| Capital Investment                                 | 206500.00        |                         |
| Cap costs Rs/yr@10.00%                             | 20650.00         |                         |
| Depreciation                                       | 38225.00         |                         |
| Maintenance  | 30975.00         |                         |
| Operation cost (Rs/yr)                             | 493946.00        |                         |
| <b>Total expenditure per year</b>                  | <b>583796.00</b> | 583796.00               |
| Income from collection fee@Rs.30/HH                | 115200.00        | 92160.00                |
| Income from recyclables                            | 239319.11        | 191455.29               |
| Compost sale                                       | 229950.00        | 183960.00               |
| <b>Total net income per year</b>                   | <b>584469.11</b> | <b>467575.29</b>        |
| <b>Surplus of income over expenditure</b>          | 673.11           | -116220.71              |
| <b>Capital Recovery Period</b>                     | 306.8            |                         |

### **Case 2: Potential recovery with biomethanation process**

The decentralized processing and recycling system based on compost and 100% recovery shows a small promise of profitability in an enterprise mode assuming this is carried out on a soft lease basis (no land costs). It is obvious that it is economic only at 100% recovery and this may be difficult to achieve. There is clearly a need for another source of revenue generation to make the enterprise profitable. Thus instead of aerobic composting the organic fraction (leading to only one saleable product – compost), it is proposed to convert it to biogas and compost (two saleable products) by installing a biomethanation plant of the CST design – similar to the one successfully operated for over 5 years in Siraguppa (Rahman *et al*, 2009). We examine the conversion of the fermentable to biogas and expect that sale of biogas locally would offset the financial deficit projected above.

In this scenario, the extent of recyclables recovered and earnings accrued does not change from the previous scenario, the income from collection fees also remains the same. The various costs and returns on investment are worked out for a decentralized waste management with a biomethanation plant as given in Table 5. In this scenario, it is clear that under ideal situation of 100% recovery of recyclables, collection costs and biogas and compost revenues, the payback period is only 2 years. Even under an 80% recovery situation, the viability is good.

**Table 5**  
**Decentralized Waste Management with biogas plant**

| <b>Decentralized optimum Waste Management with biogas plant</b> |                  |                         |
|---|------------------|-------------------------|
| <b>Categories</b>   | <b>Rs/year</b>   | <b>Optimum Scenario</b> |
| Capital Investment  | 586500.00        |                         |
| Cap costs Rs/yr@10.00%  | 58650.00         |                         |
| Depreciation  | 35425.00         |                         |
| Maintenance   | 39975.00         |                         |
| Operation cost  | 493946.00        |                         |
| <b>Total expenditure per year</b>                               | <b>627996.00</b> | 627996.00               |
| Income from collection fee@Rs.30/HH                             | 115200.00        | 92160.00                |
| Income from recyclables   | 239319.11        | 191455.29               |
| Income from biogas  | 325215           | 260172.00               |
| Compost sale  | 229950.00        | 183960.00               |
| <b>Total net income per year</b>                                | <b>909684.11</b> | <b>727747.29</b>        |
| <b>Surplus of income over expenditure</b>                       | <b>281688.11</b> | <b>99751.29</b>         |
| <b>Capital Recovery Period (years)</b>                          | 2.1              | 5.9                     |

#### **DECENTRALIZED ENERGY POTENTIAL OF BANGALORE USW-USING BIOMETHANATION**

An estimated quantity of USW of 3600tpd of Bangalore can generate 0.1944 million m<sup>3</sup> of biogas/d, which can be used as source of energy LPG substitute. The city has 198 wards with variations in area and population spread. A decentralized wardwise biogas generation is planned using average per capita waste generation (BBMP, 2010) and population statistics of Bangalore. Since a major fraction of wastes come from residential area, so to capture this waste, we considered the per capita waste generation of the city. Assuming that all the city wastes collected from houses reaches to treatment sites, we have calculated the biogas from all the wards of Bangalore. Usually, one ton of fermentable generates 75 m<sup>3</sup> of biogas in plug flow model of

biogas plant designed in CST. We also assumed that in each of ward has collection and segregation facility and treated in plug flow biogas plants. A wardwise biogas production is given in Fig 1. Total quantity of biogas varies from 364 to 691m<sup>3</sup>/d. In central part of city where population is dense it shows high production of biogas in comparison to periphery of the city, where population is less dense. Waste generated from commercial places other than restaurants could then be sort for recycling – while that remaining as unfit for recycling would be small and sent to landfills. In this way compared to the nearly 100% landfilling practiced today, the net USW to be landfilled in this scenario will be <10% currently generated.

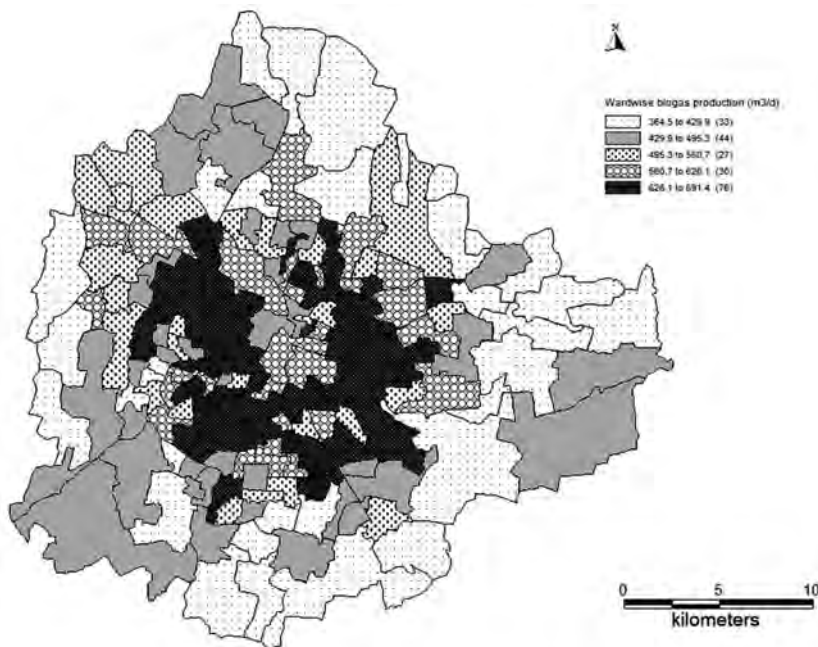


Fig. 1  
Decentralized energy (biogas) production in Bangalore

## CONCLUSION

The costs of USW collection, transport, processing and disposal have gradually become high. There is a need to treat the waste nearer to source to offset there high costs. Biomethanation process provides a clean energy source (biogas) along with compost for treatment of fermentables. This approach requires setting up decentralized anaerobic digestion (biomethanation) within residential. Decentralized systems run so far (other than biogas plants) have had aesthetic (smell and insect) and economic problems and have always been short lived. Biomethanation plants also provide many sources of revenue from sale of biogas, compost and by-products. In this paper we also present wardwise distribution of biogas potential in the city. It

also gives an idea where waste generation is more. It is therefore important that this concept be tried with at various municipalities so that we could become zero-waste cities of the future and we will look at wastes as a source of energy.

## REFERENCES

- Bizukojc, E.L., and Ledakowicz, S., 2003. Stoichiometry of the aerobic biodegradation of the organic fraction of municipal solid waste (MSW). *Biodegradation* 14, 51-56.
- BBMP, 2010. Integrated MSW Strategy for Bangalore City. Bruhat Bengaluru Mahanagara Palike Report. Karnataka.
- Chanakya, H.N., and Sharatchandra, H.C., 2005. GHG footprint of a developing country city – Bangalore. *ASTRA technical report*, CST. Bangalore.
- Chanakya, H.N., Ramachandra, T.V. and Shwetmala, 2009. Towards a sustainable waste management system for Bangalore. 1st International Conference on Solid Waste Management and Exhibition on Municipal Services, Urban Development, Public Works, IconSWM. 2009, Kolkata, India.
- Lakshmikantha, H., 2006. Report on waste dump sites around Bangalore. *Waste Management* 26, 640-650.
- Meraz L., Domínguez, A., Kornhauser, I., and Rojas, F., 2003. A thermochemical concept-based equation to estimate waste combustion enthalpy from elemental composition. *Fuel* 82, 1499–1507
- Rahman, B.A., Sab, G.M., and Chanakya, H.N., 2009. Small Town Solid Waste Management: A Case Study of Siruguppa, Karnataka. 1st International Conference on Solid Waste Management and Exhibition on Municipal Services, Urban Development, Public Works, IconSWM 2009, Kolkata, India.
- Rajabapaiah, P., 1988. Energy from Bangalore garbage- A preliminary study. *ASTRA technical report*, CST. Bangalore.
- Rhyner, Ch R., Schwartz, L.J., Wenger, R.B., and Kohrell, M.G., 1995. Waste management and resource recovery. Boca Raton: CRC Press. 482–4.
- TIDE, 2000. Energy recovery from municipal solid wastes in around Bangalore. Technology Informatics Design Endeavour Technical report. Bangalore.
- Tillman, D.A., 1991. The combustion of solid fuels and wastes. London: Academic Press, Chapter 5.
- van Bükering, P., 1994. An economic analysis of different types of formal and informal entrepreneurs, recovering urban solid waste in Bangalore (India). 12, 229-252.





**Centre for Environment and Development**

Thozhuvancode, Vattiyorkavu P.O, Thiruvananthapuram-695 013

Phone : 0471-2369720, 2369721, Fax : 0471-2369720

E-mail : [director@cedindia.org](mailto:director@cedindia.org), [office@cedindia.org](mailto:office@cedindia.org)

URL : [www.cedindia.org](http://www.cedindia.org); [www.indiawastemanagementportal.org](http://www.indiawastemanagementportal.org)